Satinelle Massage Premium

HP6490

Service
Service
Service



Philips Domestic Appliances and Personal Care

ServiceManual

PRODUCT INFORMATION

The combination of the ceramic epilating system with the new active massaging system constitutes a revolution in epilation.

Safety

- This product meets the requirements regarding interference suppression on radio and TV.
- After the product has been repaired, it should function properly and has to meet the safety requirements as officially laid down at this moment.

TECHNICAL INFORMATION

- Power Source		: Rechargeable
- Voltage		: 100 V - 240 V (50 - 60 Hz)
- Motor		: DC - Motor 2,4 V
- Power Consumption		: 7,5 W
- Number of Discs		: 13
- Number of catching points		: 24
- RPM	speed I	: 2400
	speed II	: 2800
- Pulling actions/second		
	speed I	: 960
	speed II	: 1120

DISASSEMBLY- AND RE-ASSEMBLY ADVISE

- No specific issues.

REPAIR INSTRUCTION

- This is a replacement appliance.
  For this Epilator only the parts shown in the exploded view will be supplied.

Hints for repairs:

- No specific issues.


OPTIONAL (accessories)


- No specific issues.


Published by Philips Domestic Appliances and Personal Care Printed in the Netherlands © Copyright reserved Subject to modification

07/02

PHILIPS

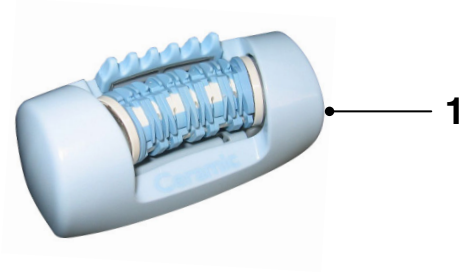


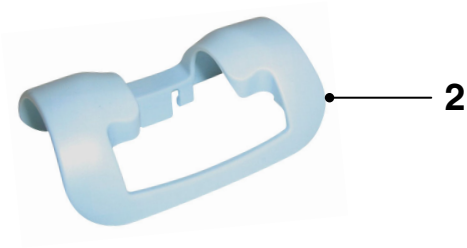

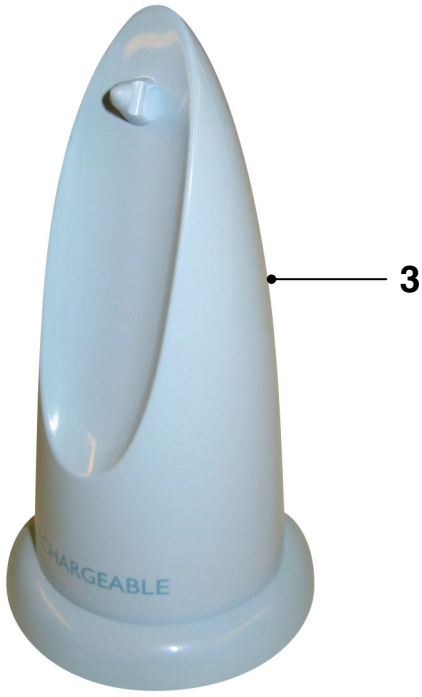





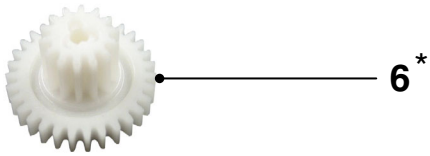


Pos	Service code	Description
1	4203 035 53840	Epilation Head
2	4203 035 53850	Soothing Cap
3	4203 035 53860	Stand
4	4822 479 30183	Cleaning Brush
5	4203 035 52890	Adapter WEU
	4203 035 52970	Adapter GB


Pos	Service code	Description
5	4203 035 52950	Adapter UNI - TW / MX
	4203 035 51370	Adapter CA
	4203 035 52960	Adapter AR
	4203 035 53500	Adapter JP
	4203 035 52980	Adapter CN
6*	4203 035 53060	Gearwheel 3

* **For replacing the gearwheel see the instructions on the next pages.**


Remove the small gearing cover with a small screwdriver.

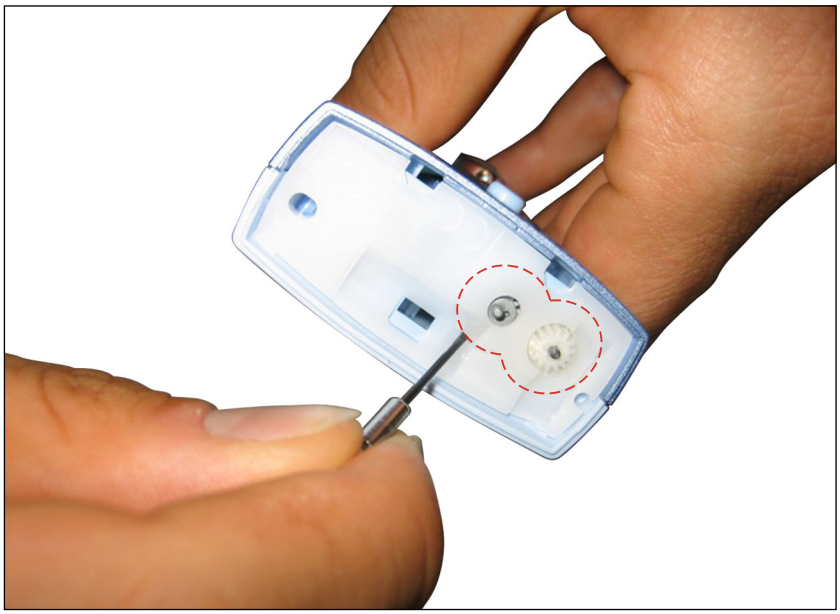

Here you see the opened gearing.
As you can see, the small edge from the release knob is hampering you by removing the damaged gearwheel.

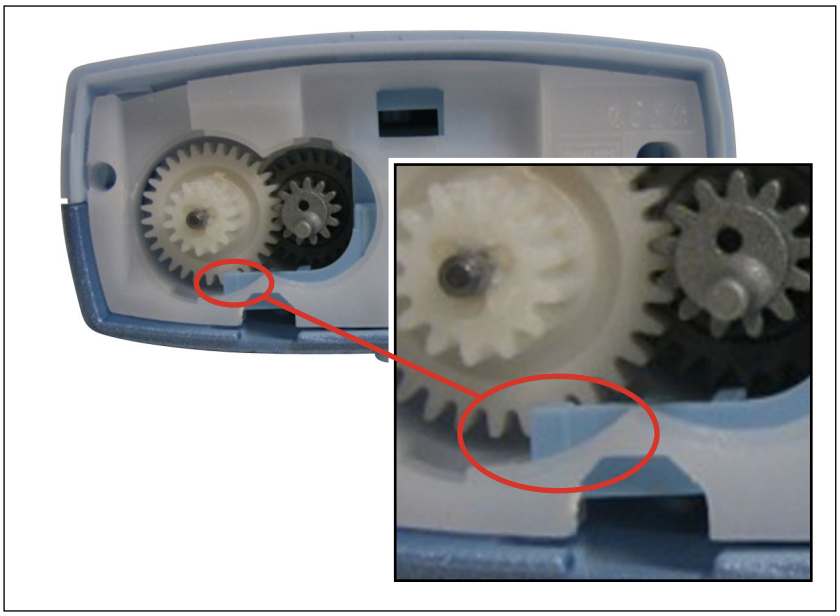

Cut this small edge with a very sharp knife, so that the damaged gearwheel becomes free.

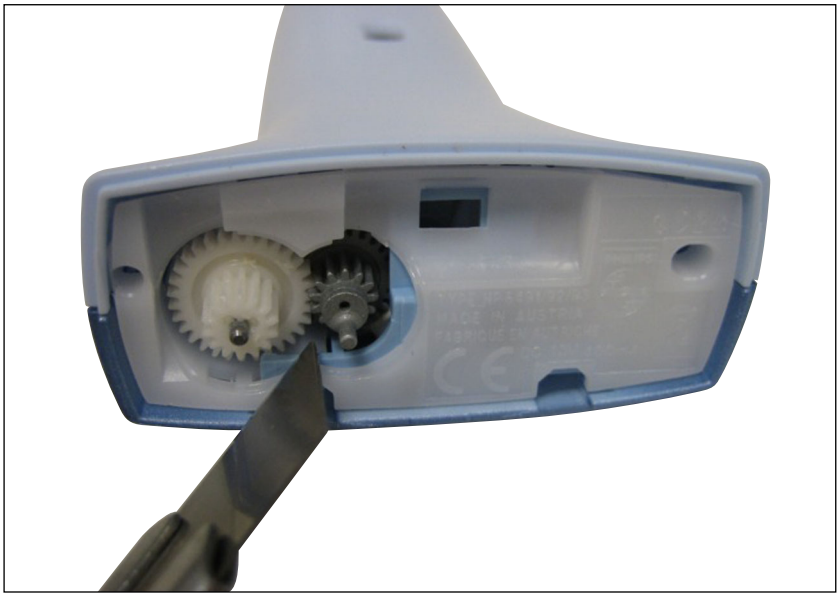

Cutted edge.



Now you are able to exchange the damaged gearwheel.

