
INDESIT company

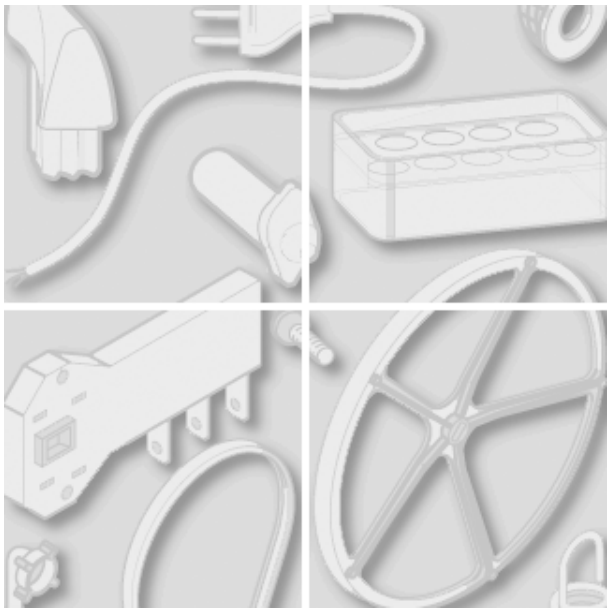

Model type:
WA6XIT

Commercial code:
F026881

General notes

Technical Documentation guidelines

You can find herewith some generic information to simplify cunsulting of technical documentation:

1. Models of same range share the same exploded views, which report the richest set of spare parts:generally, a model does not necessarly have a related spare part for each particular shown on exploded views.

2. Some spare parts can not be represented directly on the exploded views (instruction booklets, specific kit, etc...). You can find those codes in the spare parts list with the same reference of particular where spares are installed or with references 099, 999. Instruction booklets, once managed, appear with 000 reference.

3. On the higher right site of each exploded view there is a serial number which indicates the beginning of the production of certain range:some models might have more than an exploded view for a given category, each distinguished by a different serial no.and linked to another spare parts list, In this case, serial no. is required to supply the right spare part code. Exploded view to be considered is the one with a more recent serial no. but previous than the one of the model that needs assistance.

4.Exploded views might require further updates even after publishing. Addition of new spares will go on following the already existing numeration references. Revision number of an exploded view is shown into last four digits of serial number into upper right hand corner.

5.The spare parts list associated to an exploded view shows related codes of spares managed for a certain model; for each spare part other informations are available:


REF: reference no of spare into a table; SUBSTITUTE: list of spare(s) which can replace a code but that keeps same functional characteristics

INDUSTRIAL CODE: list of variables of a model (shown into model label) where such spare is used; NOTICE: code of information(s) to refer to complete technical intervention, track for changes or to find correct spare part code.

6. Some notices, into a same section are generic therefore cannot be directly linked to a spare part. In order to assist a model in the best way as possible, it is helpful to pay attention to all notices and constantly verify documentation updates

7.Technical documentation cover shows model name and its commercial codes


1180110 Exploded views

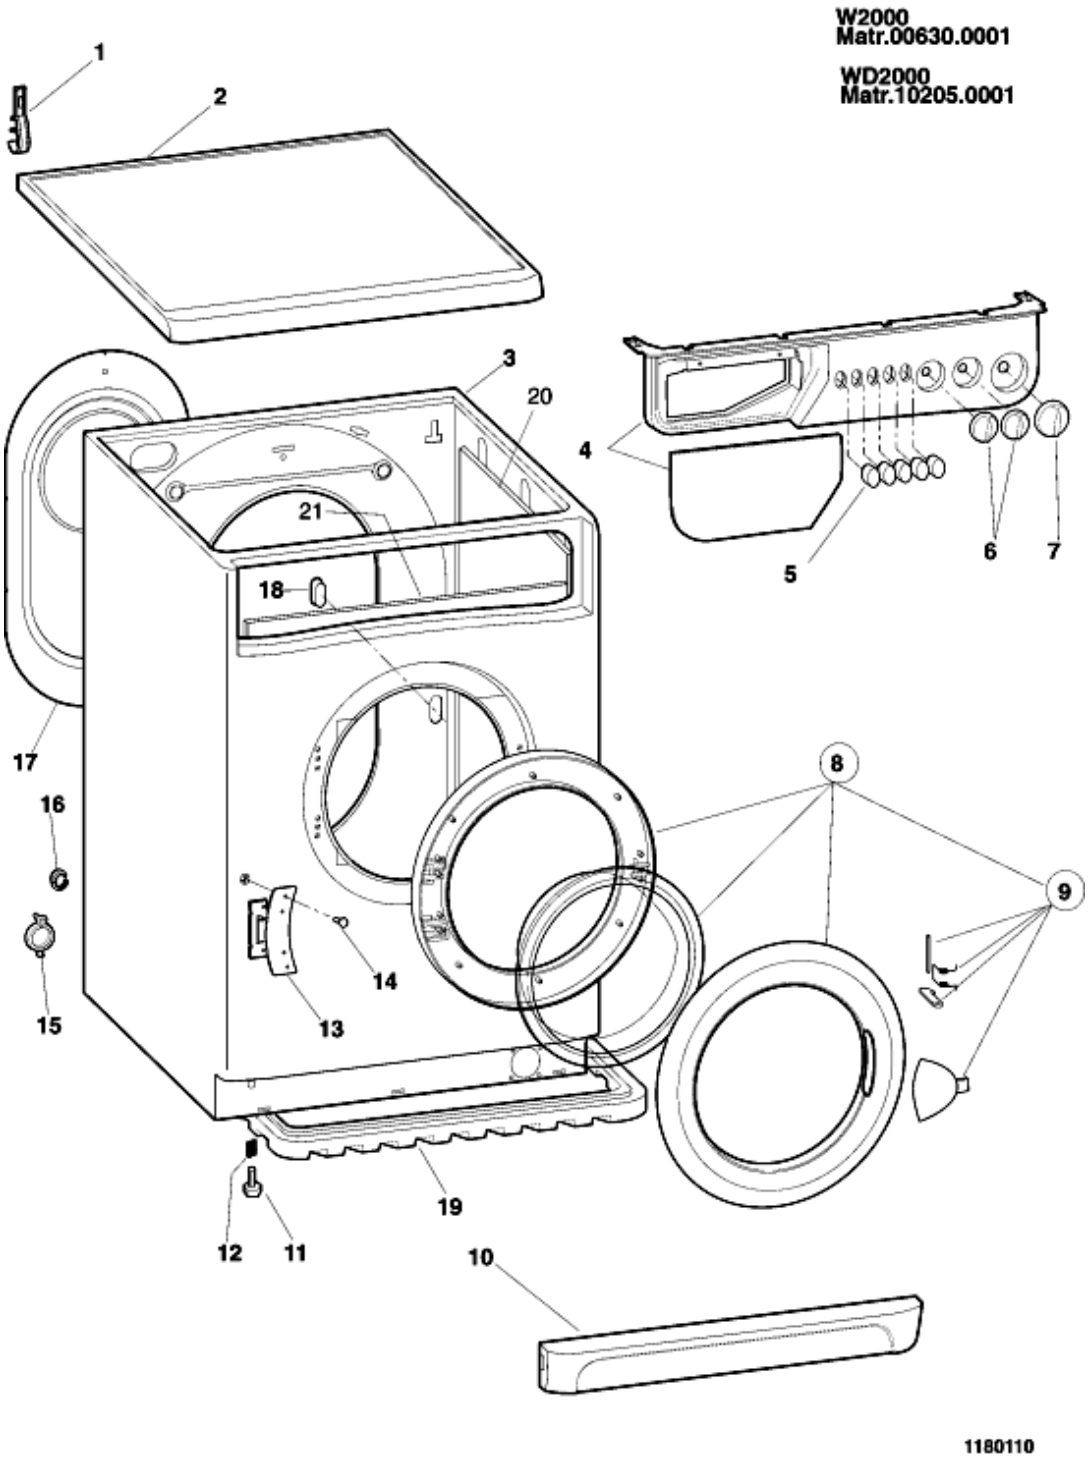

1180110 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
000	C00085212				user instructions booklet it		
001	C00046667				wiring stop	n1040282	80268810000
001	C00064550				drain hose holder		
001	C00091904				cable clamp hose		80268810030
002	C00075314				top - white		
003	C00075315			1 x C00090578	cabinet	n1040230	
				1 x C00118608		n1040276	
003	C00090578			1 x C00118608	cabinet white b27		
004	C00085073				dashboard + handle		
005	C00075317				push button white		
006	C00075318				control knob - white		
007	C00075319				wash timer knob white		
008	C00075320				door frame assy		
009	C00075323				door handle kit		
010	C00075324				plinth white		
011	C00050320			1 x C00084810	foot - rear m 8 h = 41 mm		
				1 x C00110512			
012	C00083828				foot spring (11x8.5mm)		
013	C00075325			2 x C00096210	hinge door 3.5 mm indesit		
				1 x C00255430			
014	C00002497				nut m4x3,2x7		
014	C00019846				civata t 1/2 t m4x12		
014	C00065185				bolt m4,5 x 8		
015	C00046666				collar for drain hose		
016	C00003144				blanking plug 11mm		
016	C00065871				blanking plug		
017	C00064501			1 x C00099313	rear cover - white		
				1 x C00116923			
018	C00084817				blanking plate-rear(test plug)		
099	C00040932				self locking nut m6		
099	C00065727				spacer l= 124,5		
099	C00066090				bolt kf tc m6 x140 zc sp packing		
099	C00066091			1 x C00077411	washer packing		
099	C00077411				transit bolts kit (1 screw + 1		

1180210 Exploded views

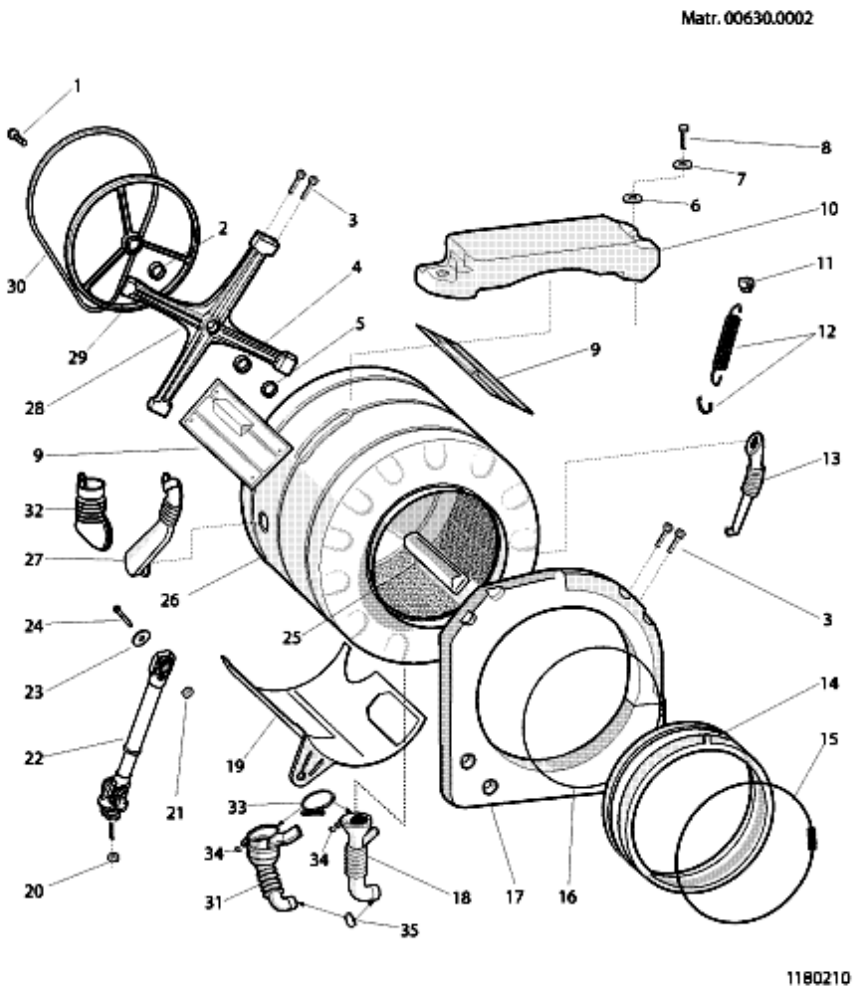


1180210 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
001	C00064786			1 x C00143260	bolt m8x23 torx tefl		
002	C00002591				bearing 20x47x14		
003	C00051737				torx m8 x 27 dri-loc screw		
004	C00002590				bearing 17x40x12 6203-2z skf		
005	C00042890				sealing ring 600 rpm		
007	C00055018				washer m8		
008	C00014342				bolt m8x75 te		
009	C00065918				support left right lb		
010	C00064548				upper counterweight 11 kg		
011	C00064515				anchorage pad - suspension		
012	C00064502				suspension spring - tank		
013	C00074144				detergent recovery hose		
014	C00064545				door seal(no deterg recov hose)	n1040282 n1040291	
014	C00093345				door seal (hl)	n1040282	80268810030
015	C00064546				clamping ring - door seal front		
016	C00064547				bellows clamp (tank front)	n1040291	
016	C00092155				door seal- rear retainer		80268810030
017	C00064516			1 x C00092178	front counterweight	n1040291	
017	C00092178				front counterweight		80268810030
018	C00064531				hose tank to filter	n1040282	80268810000
019	C00066074			1 x C00093878	cradle outer- set	n1040286	
019	C00093878				cradle outer- set	n1040325	80268810030
021	C00030443			1 x C00047136 1 x C00144571	nut romob m8		80268810030
021	C00030680			1 x C00040130	nut m 10	n1040286	
021	C00065152				nut romob m6x22x1,5		
022	C00064503				shock absorber 80 n	n1040230	
022	C00086515				shock absorber 80 n (11105)	n1040286	
022	C00303582				kit shock absorber 80 n 8.15 mm		80268810030
024	C00030446				bolt m10 x 45 zntr	n1040286	
024	C00093750				bolt zink m8x40		80268810030
025	C00065463				lifter 40 - 46l		
026	C00066081			1 x C00076778	outer- set 40 l.	n1040282 n1040291	80268810000

1180210 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
026	C00092452			1 x C00093772 1 x C00094285	outer- set 40 l.		80268810030
026	C00094286			1 x C00094275 1 x C00094285	outer- set 40 l. evo ii		80268810030
027	C00064528				hose dispenser to tank	n1040282	80268810000
028	C00064514			1 x C00112708	bearing spider assembly		
029	C00064527				drum pulley cone d=280 mm h=		
030	C00059721				belt l=1181/1187 mm h7		
031	C00092174				hose tank to filter with oko ball		80268810030
032	C00092161				hose dispenser to tank		80268810030
033	C00091148			1 x C00094908	clamp d=79 mm		
035	C00092411			1 x C00094908	hose clamp		
099	C00033026			1 x C00292523	ambljgon grease ta 100 gr.		

1180310 Exploded views

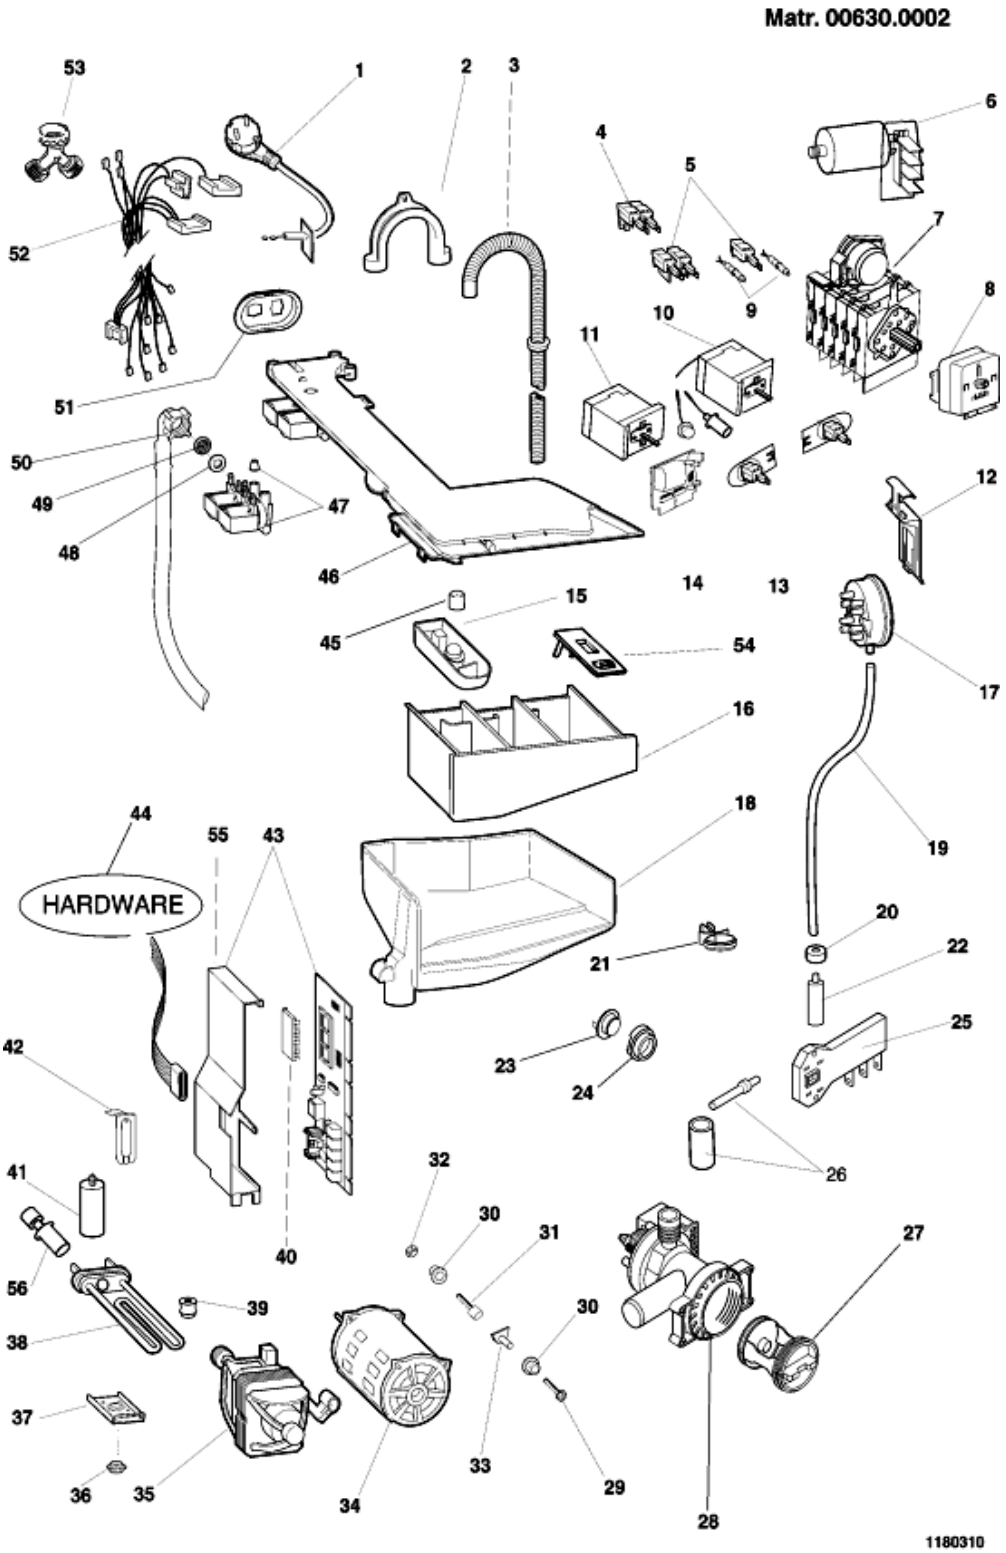

1180310 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
001	C00064563				supply cable 3x1 schuko 1,5 m	n1040276	
001	C00091633				supply cable 3x1 schuko		
002	C00019902				plastic -u- to make drain hose		
003	C00027466				drain hose - to sink l=1860mm		
005	C00058465				on-off switch (double pole)	n1040246	
005	C00063971				on-off switch		
005	C00075445				push button switch na	n1040229 n1040246	
005	C00088394				push button switch na idc		
006	C00064559				radio interference suppressor		
008	C00064555				programme select switch	n1040229	
008	C00083916				programme selector (idc elbi) (hl)		
009	C00075456				red pilot lamp indesit	n1040255	
009	C00075457				pilot light red 12 v	n1040229	
009	C00086663				pilot light red 12 v rast 2.5		
009	C00089024				pilot light red 230v ra2,5		
012	C00064537			1 x C00263210	support - pressure switch		
013	C00057242				potentiometer 8 pos.	n1040229	
013	C00085195			1 x C00143096	potentiometer 8 pos. idc rast 2,5		
015	C00075459				additive container		
016	C00075352			1 x C00097732	soap dispenser drawer		
017	C00075337				pressure switch 1 l. +	n1040229	80268810000
017	C00087187				pressure switch 1 l.101-76 +	n1040282	80268810000
017	C00092312			1 x C00145174	pressure switch 1 l.80 -55 +	n1040299	80268810030
018	C00075351			1 x C00097732 1 x C00097835	dispenser body		80268810000
018	C00092314				dispenser body		80268810030
019	C00041785			1 x C00144077	air trap hose 540 mm.	n1040282	80268810000
019	C00092170			1 x C00041785	pipe pressostat l= 470mm. evo ii		80268810030
020	C00019755				anti-vibration bush (foam)		
021	C00064530				clip-pressure switch tube		
022	C00064532			1 x C00092173	air trap	n1040282	80268810000
022	C00092173				air trap x oko		80268810030
025	C00011140				door interlock	n1040229	
025	C00085194				door interlock		

1180310 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
027	C00045023				filter handle		
027	C00045025				filter seal		
027	C00045027				pump filter kit		
028	C00064950				self cleaning pump 240v./50hz.	n1040282	80268810000
028	C00076510			1 x C00092264	self cleaning pump 240v./50hz.		80268810030
029	C00052497			1 x C00082723	bolt m6x30		
030	C00104675				motor rubber bush		
031	C00064553				motor bolt		
033	C00050187				fixing nut		
035	C00043430			1 x C00097257	tacho generator black for ice		
035	C00047317			1 x C00196539	brush for motor		
035	C00056962				motor ice 850/1000 rpm (hl)	n1040258	
038	C00081837			1 x C00087188	heating element+termal cut-out	n1040229	
038	C00087188				heat element + sensor hole	n1040300	
039	C00050878			1 x C00058523	heating element slide		
040	C00085213			1 x C00092688	eeprom wa6xit 80268810000	n1040282	80268810000
040	C00092688				eeprom wa6xit software		80268810030
043	C00080981			1 x C00093350	module (less eeprom) sw 1.32	n1040229	
043	C00084838			1 x C00093157	universal module (less eeprom)		
044	C00066292				insulated tweezers		
044	C00077454			1 x C00084566	housing seriale lb2000-pc white		
044	C00084943			1 x C00099862	serial cable lb2000 - pc	n1040211 n1040317	
045	C00046157				stopper detergent container		
046	C00075458				hopper cover 1 ev		
047	C00064534				seal - dispenser to valve		
047	C00066518				solenoid valve 2 way		
048	C00005572				sealing washer-mains inlet hose		
050	C00003070				mains inlet hose cold 25c 10bar		
051	C00064946				electrovalve support 1 ev		
052	C00082309				wiring	n1040229	
052	C00087832				wiring idc		
054	C00047069			1 x C00097834	additive cover		
056	C00081653				complete probe heating element	n1040229	
056	C00083915				thermistor ntc		

1180310 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
057	C00092412				hose clamp		
058	C00008612				tube clamp 34,6-36,4		

Notices

n1040061: Trouble-shooting.

Intervention procedure on 2000 washing machines

1. Reading the error code

The fault on the appliance is signalled via:
1. the continuous rotation of the selector knob
2. the action, for the first 4', of the electrovalve and the drain pump
3. the door becomes unlocked
4. the led flashes:
the number of flashes indicates the fault code; the code should be read as follows:
· each fast flash (2/3 flashes of the led very close together) represents one code value
· the fault code is evaluated by counting the number of flashes occurring at 3/4" intervals from one another
· stop counting when the washing machine waits the equivalent of approximately 8/9" between flashes
· the procedure is repeated by the appliance cyclically

E.g.: F03

(FIGURE NT 00)

2. Autotest

Should the washing machine not be signalling an error, you can check it using a serial key and using a particular autotest cycle, which is to be activated as follows:
1. bring the washing machine to reset position (coloured ball) for at least 5" and wait until the led flashes on reset mode
2. insert the hardware key into the serial outlet
3. position the switch situated on the key in TEST position
4. wait for the door to lock and for the selector to start turning
5. position the switch situated on the key in PC position
the appliance will carry out the following cycle:
· selector moves on up to position 0 (12h if the appliance has a delay, programme 1 if it has no delay)
· loads the wash electrovalve for approx. 10"
· loads the pre-wash electrovalve for approx. 10"
· loads the wash electrovalve and pre-wash electrovalve at the same time until the pressure switch is on full
· heats up to 30° and moves the motor in both directions
· selector moves on for 9 notches
· drains and spins
· the selector knob stops on one of the reset positions
· STOP

The test cycle can be repeated as many times as you wish following the same procedures
The test cycle can be interrupted by positioning the selector knob on one of the reset positions.
3. Intervention in the event of a Fault

In the event of a fault, the procedure to go by is as follows:

F01: Triac Short circuit
Overhaul CNE
Replace Card

F02: Blocked Motor, Short-circuited/Open Tachometry
Overhaul CNE
Overhaul Motor connector
Control CNE Continuity/Motor Connector
Control Motor Windings
Control Tachometry Windings
Replace Card

F03: Open/Short-Circuited NTC Found
Overhaul CNA
Control NTC Wiring
Control CNA/NTC Wiring Continuity
Replace NTC
Replace Card

F04: Overflow and Pressure Switch Empty found at the same time (Pressure Switch stuck on Empty)
Overhaul CN1
Overhaul Pressure Switch Contacts
Control CN1/Pressure Switch Continuity
Replace Pressure Switch
Replace Card

F05: Blocked Pump or Pressure Switch stuck on Empty Found
Overhaul CNF (pump connector)
Overhaul Pump Connector
Control Pump Filter
Control Pump Windings
Change Pump
Replace Card

F06: Selector Error (a part no. cannot be found)
Overhaul CND (selector connector)
Overhaul Selector Connector
Control Selector/CND Continuity
Control Selector Motor
Replace Selector
Replace Card

F07: Resistance Relay Stuck
Overhaul CN1
Overhaul CN1
Overhaul Resistance Connection
Replace Card

Overhaul Resistance Connection
Replace Card

F08: Resistance Missing or Pressure Switch stuck on Full Found
Overhaul CN1
Overhaul Resistance Connection
Overhaul Pressure Switch Connection
Replace Resistance
Replace Pressure Switch
Replace Card

F09: Machine Setup Error Found
Control Microprocessor Version
Ask for EEPROM Spare Part indicating Microprocessor version

F10: Pressure Switch Empty and Full or neither Empty nor Full Pressure Switch Found
Overhaul CN1
Overhaul Pressure Switch Wiring
Control CN1/Pressure Switch Continuity
Replace Pressure Switch
Replace Card

F11: Pump Feedback Missing
Overhaul CN1
Overhaul CNF
Overhaul Pump Connector
Overhaul Pressure Switch Connector
Control Pump Windings
Replace Pump
Replace Card

F12 SPECIFIC FOR LVB2000 INDESIT EVOLUTION / DIALOGIC.
F12: Lack of Display card-Main Card Communication
1. Check the effectiveness of contacts on CNC Connector Card
2. Overhaul 8-way connector on Display card
3. Check continuity of CNC-CN 8 way connector
4. Replace Main Card
5. Replace Display Card

F13: NTC wiring harness disconnected from the dryer system
1. Check the efficiency of the terminals on the CNA connector board
2. Check NTC wiring harness
3. Check the wiring harness continuity of the CNA / NTC connectors
4. Replace NTC
5. Replace terminal board

F14: Dryer connector open or not connected
1. Check the efficiency of the terminals on the CNI connector board
2. Overhaul CN1
3. Overhaul connector connection
4. Replace the board.Merloni Elettrodomestici

F15: Dryer connector is always active
1. Check the efficiency of the terminals on the CNI connector board
2. Overhaul connector connection
3. Overhaul the pressure sensor connection
4. Replace the connector

5. Replace pressure sensor
6. Replace the board

F16: Non-functioning basket block
1. Go over connector card CNC
2. Go over connector basket block
3. Control Continuity of cabling CNC / basket block and basket block supply
4. Replace basket block
5. Replace card

N.B.From Fault F01 to fault F11
These are shown by LEDs in stand by/on in LVB2000 machines Ariston/Indesit.
From fault F01 to fault F12
These are shown in a display located on the instrument panel of LVB2000 ma-chines
Evolution Indesit.
From fault F01 to fault F15
Are those that are indicated according to the version via LED stand by/on or
display positioned on the Wash Dry machine Ariston/Indesit panel.

4. Replacing the card

Should you have to replace the card:
· retrieve the EEPROM from the old card
· reassemble the EEPROM onto the new replacement card (without EEPROM)

In the event, and only in this case:
· an F02 has been detected
· the above-mentioned checks have been carried out and no problems have been detected on the wiring or to the motor
· the card fitted onto the washing machine is a 12 or 20 version (the version is indicated by a label on the module-containing box with SW20 or SW12)

you should:
· fit on a new card (version 32 or above)
· fit on an updated EEPROM to request from the assistance service centre, stating the code (e.g. 80xxxxx0000 or 46xxxxx0000), the serial number and the washing machine model.

n1040066: LB2000 Hardware (Serial hardware key and Pliers)

As of 05.04.2000, the following Spare Parts are available from the Warehouse:

Part no.066055 - Serial hardware key for LVB2000 autotest. It has not to be linked to PC. (substituted with 077454);
Part no. 077454 - Serial hardware key for LVB2000-PC White (substituted with 084566);
Part no. 084566 - Serial hardware key for LB2000/EVOI -PC BIANCA (substituted with 095669 LB2000/EVOI, EVOII - PC).

Part no.066292 - Extractor pliers for integrated circuits.

For instructions on use, please refer to the relative Service Manual.

n1040211: Serial cable to connect the hardware key with the PC.

To connect the hardware key: LB2000 with the personal computer,you must use
a serial cable, pin to pin 9 pin F/F, to garantee the availability, it was
decided to manage it as a spare part.

The SAT code of the cable (length 2m) is 084943.

n1040229: Items with IDC connectors.

From November 2001, in order to improve electrical connections on models produced in Teverola and Comunanza plants, electrical components supplied with IDC connectors have been applied.

New particulars are:
Code 083916 = PROGRAMME SELECT ELBI 1665 RAST.2 8 POS.
Code 085195 = POTENTIOMETER 8 POS. IDC;
Code 083915 = TEMPERATURE SENSOR NTC ELTH;
Code 087823 = CONDUCIBILITY CONTROL CARD IDC;
Code 085194 = DOOR INTERLOCK IDC;
Code 080662 = PUSH BUTTON SWITCH NA ON OFF;
Code 088394 = PUSH BUTTON SWITCH S.CM NA IDC;
Code 086660 = PRESSURE SENSOR 1LEVEL 93 - 68 + ANTI-SPILL;
Code 088393 = PRESSURE SENSOR 1 LEVEL 90 - 65 + ANTISPILL;
Code 087187 = PRESSURE SENSOR 1 LEVELS + ANTI-SPILL;
Code 085193 = PRESSURE SENSOR 1 LEVELS + ANTI-SPILL;
Code 084763 = RED WARNING LIGHT 12 V INDESIT;
Code 086663 = RED WARNING LIGHT 12 V RAST2 ARISTON
Code 087188 = HEATING ELEM.TERMAL CUT-OUT 1700W/230V L= 169,5 mm ;
Code 086661 = HEATING ELEMENT FOR PROBE 1700W 230V L= 212.5 mm;
Code 089416 = MODULE (LESS EEPROM) WM-WD > 1200 RPM.IDC ;
Code 089074 = MODULE (LESS EEPROM) SW 2.22 YELLOW >1200 IDC;
Code 089404 = MODULE (LESS EEPROM) IDC EW-AR-IN<1200.
Code 084838 = MODULE (LESS EEPROM) MODULE UNIV. STRIP SW 220 IDC.

Wires with IDC connectors can be found directly on spare parts list of models to be repared.

This change has not affected EEPROM which remain the same.

To find the right particular to use:

1 – Find the modified particular into spare parts list of model of interest

2 – Check list of models herebelow given and compare with their serial no.

Models related to Comunanza and Teverola plants in alphabetical order.
Models of Communanza factory. by
A1124UK (23572) Matr. 11209.0001;

A1234UK (22573) Matr. 11217.0001;
A1435SUK (23575) Matr.20502.0001;
A1435UK (23574) Matr.20502.0001;
A1535UK (28069) Matr.20502.0001;
A1635UK (27051) Matr.20502.0001;
AA1000BFR (25700) Matr.11209.0001;
AAX106LFR (25698) Matr. 20121.0001;
AAX116LFR (25591) Matr.20121.0001;
AAX126LFR (25699) Matr. 20121.0001;
AAX149LFR (26286) Matr.20502.0001;
AB104XTK (22504) Matr. 11217.0001;
AB108XEO (26389) Matr.11209.0001;
AB108XIT (22443) Matr. 11203.0001;
AB63XGR (24894) Matr. 11217.0001;
AB65XEO (24492) Matr. 11209.0001;
AB66XIT (26972) Matr. 20121.0001;
AB84XTK (22504) Matr. 11217.0001;
AB88DAG (26561) Matr.20527.0001;
AB88DEX (24898) Matr.20527.0001;
AB88XEO (26388) Matr. 11217.0001;
AB88XEX (23861) Matr. 11217.0001;
AB88XIT (22444) Matr. 11209.0001;
AC106BFR (25817) Matr.20527.0001;
AC120LIT (26836) Matr.20527.0001;
AC128LFR (25818) Matr.20527.0001;
AC80LIT (26835) Matr.20527.0001;
AC96BFR (25816) Matr.20527.0001;
AD1000EX (27764) Matr. 20610.001;
AD1200IT (26694) Matr. 20610.001;
AD1200TK (27199) Matr. 20610.001;
AD1600FR (27157) Matr. 20610.001;
AD1600IT (26834) Matr. 20610.001;
AD1600ITPXU (27163) Matr. 20610.001;
AL107XFR (23684) Matr. 20121.0001;
AL108DAG (24900) Matr.20527.0001 ;
AL108DEX (24901) Matr.20527.0001;
AL108DK60 HZ (24905) Matr.20527.0001
AL108XBE (23648) Matr. 11203.0001;
AL108XSTK (22698) Matr.20121.0001;
AL108XTK (22506) Matr.20121.0001;
AL109SLFR (22495) Matr.20121.0001;
AL109XAUS (26024) Matr. 11217.0001;
AL109XEU (22514) Matr. 11203.0001;
AL109XEX (24734) Matr. 11203.0001;
AL109XIT (22360) Matr. 20121.0001;
AL109XSK (25855) Matr. 11203.0001;
AL118DTK (24902) Matr.20527.0001;
AL128DAUS (24904) Matr.20527.0001;
AL128DEX (24903) Matr.20527.0001;
AL128DSAUS (25742) Matr.20527.0001;
AL128XBE (23656) Matr. 20121.0001;
AL129SLBE (23990) Matr.20121.0001;
AL129XAUS (23864) Matr. 11217.0001;
AL129XEU (22515) Matr. 11202.0001;
AL129XSK (25856) Matr. 11202.0001;
AL129XTK (22507) Matr.20121.0001;
AL12SUK (24363) Matr. 11209.0001;

AL12UK (23576) Matr. 11209.0001;
AL149XEX (22516) Matr.20502.0001;
AL149XSK (25857) Matr.20502.0001;
AL14UK (23577) Matr.20502.0001;
AL169XAUS (26458) Matr.20502.0001;
AL169XEU (24897) Matr.20502.0001;
AL67HCGR (23885) Matr.11210.0001;
AL68XEX (23863) Matr. 11211.0001;
AL68XIT (22363) Matr. 11126.0001;
AL68XPT (22485) Matr. 11217.0001;
AL68XSPT (22977) Matr. 11217.0001;
AL88DEX (24899) Matr.20527.0001;
AL88XEU (22512) Matr. 11204.0001;
AL88XPT (22482) Matr. 20121.0001;
AL88XSPT (22483) Matr.20121.0001;
AL89XIT (22362) Matr. 20121.0001;
AL89XSEX (24735) Matr. 11203.0001;
AL89XSIT (22445) Matr. 20121.0001;
AL98XSPT (27630) Matr.20121.0001;
ALD10UK (26092) Matr.20527.0001;
ALD12SUK (26094) Matr.20527.0001;
ALD12UK(26093) Matr.20527.0001;
ALS104XFR (22501) Matr. 20114.0001;
ALS109XEO (26392) Matr. 11217.0001;
ALS109XEU (22520) Matr. 11219.0001;
ALS109XIT (22470) Matr. 20114.0001;
ALS129XEU (22521) Matr. 20114.0001;
ALS68XIT (22473) Matr. 11217.0001;
ALS88XEO (26391) Matr. 20108.0001;
ALS88XEU (22519) Matr. 20108.0001;
ALS89XIT (22472) Matr. 20114.0001;
ALS89XSIT (22471) Matr. 20114.0001;
AWD10UK (26095) Matr.20527.0001;
AWD12SUK (26097) Matr.20527.0001;
AWD12UK (26096) Matr.20527.0001;
CDE12X (27226) Matr. 20610.001;
CDE12XUK (27227) Matr. 20610.001;
LBE12X (26961) Matr. 20610.001;
LBE12XUK (27155) Matr. 20610.001;
LBE6X (26968) Matr. 20610.001;
LBE8X (26969) Matr. 20722.0001;
SGE12XUK (27241) Matr. 20610.001;
W104TXSBE (25827) Matr. 20128.0001;
W104TXSTK (24746) Matr. 20121.0001;
W104TXTK (23411) Matr. 20121.000;1
W105TXEX (234403) Matr. 20128.0001;
W105XDE (24835) Matr. 20114.0001;
W106XDE (24836) Matr. 20114.0001;
W108XIT (24820) Matr. 20128.0001;
W108XSP (23405) Matr. 20128.0001;
W1215XSDE (24839) Matr. 20114.0001;
W123SUK (23413) Matr. 20121.0001;
W123UK (23369) Matr. 20121.0001;
W123XNL (23416) Matr. 20121.0001;
W124XDE (24837) Matr. 20121.0001;
W124XNL (23418) Matr. 20114.0001;
W125TXEX (23378) Matr. 20128.0001;

W125XDE (24838) Matr. 20114.0001;
W125XSDE (24839) Matr. 20114.0001;
W125XFR (24435) Matr. 20128.0001;
W126XDE (24840) Matr. 20114.0001;
W128XSP (24428) Matr. 20128.0001;
W133UK (24026) Matr. 20121.0001;
W133SUK (24518) Matr. 20121.0001;
W143SUK (27059) Matr.20502.0001;
W143UK (27530) Matr.20502.0001;
W143XNL (23170) Matr.20502.0001;
W144XDE (24841) Matr.20520.0001;
W144XNL (23419) Matr.20502.0001;
W144XSNL (24743) Matr.20502.0001;
W145TXEX (23379) Matr.20521.0001;
W145XDE (24842) Matr.20520.0001;
W146XDE (23843) Matr.20520.0001;
W146XSDE (26461) Matr.20520.0001;
W165TXEX (24796) Matr.20502.0001;
W165XNL (24764) Matr.20502.0001;
W166XDE (26464) Matr.20520.0001;
W682XSIT (24813) Matr. 20114.0001;
W683XGIT 24812) Matr. 20114.0001;
W68XIT (24408) Matr. 20114.0001;
W68XSIT (24409) Matr. 20114.0001;
W842XSIT (24818) Matr. 20128.0001;
W843XGIT (24820) Matr. 20128.0001;
W84TXEX (23401) Matr. 20114.0001;
W84TXTK (23410) Matr. 20121.0001;
W84XSP (23409) Matr. 20114.0001;
W84XSP (24469) Matr. 20114.0001;
W857XSPT (26661) Matr. 20128.0001;
W857XSPT (26661) Matr. 20128.0001;
W88XIT (23395) Matr. 20128.0001;
WA10XIT (26883) Matr. 20128.0001;
WA6XIT (26881) Matr. 20114.0001;
WA8XIT (26882) Matr. 20128.0001;
WA8XSIT (26919) Matr. 20128.0001;
WAS6XIT (27052) Matr. 20204.0001;
WAS8XIT (27053) Matr. 20205.0001;
WD104TEX (24908) Matr. 20603.001;
WD105TEX (24909) Matr. 20603.001;
WD105TEX220-60 (27603) Matr. 20603.001;
WD106FR (25691) Matr. 20603.001;
WD10UK (25056) Matr. 20603.001;
WD118SP (26335) Matr. 20603.001;
WD11UK (25058) Matr. 20604.001;
WD125TEX (24910) Matr. 20604.001;
WD125TSEX (27152) Matr. 20604.001;
WD12SUK (25538) Matr. 20604.001;
WD12UK (25057) Matr. 20604.001;
WD12XUK (27233) Matr. 20610.001;
WD84EX (24906) Matr. 20603.001;
WD84TEX (24907) Matr. 20603.001;
WDE12X (27232) Matr. 20610.001;
WE105XR (26953) Matr. 20603.0001;
WE10UK (24459) Matr. 20603.0001;
WE11UK (24460) Matr. 20603.0001;

WE125XEX (24789) Matr. 20603.0001;
WE12SDE (27149) Matr. 20610.001;
WE12SUK (24462) Matr. 20603.0001;
WE12SUK (27154) Matr. 20610.001;
WE12UK (24461) Matr. 20603.0001;
WE12XNL (24762) Matr. 20603.0001;
WE13UK (24463) Matr. 20603.0001;
WE145XEX (24792) Matr. 20610.001;
WE14DE (27080) Matr. 20610.001;
WE14SDE (27150) Matr. 20610.001;
WE14SUK (27153) Matr. 20610.001;
WE14UK (24464) Matr. 20610.001;
WE14XNL (24763) Matr. 20610.001;
WE14XSNL(27752) Matr. 20610.001;
WE16DE (27151) Matr. 20610.001;
WE16UK (25162) Matr. 20610.001;
WE16XNL (27765) Matr. 20610.001;
WE8XR (26952) Matr. 20603.0001;
WES9XR (26892) Matr. 20603.001;
WH96TXE (25376) Matr. 20128.0001;
WS105TXEX (23356) Matr. 20205.0001;
WS682XSIT (24826) Matr. 20204.0001;
WS683XGIT (24822) Matr. 20204.0001;
WS84TXEX (23355) Matr. 20204.0001;
WS88XIT (23349) Matr. 20205.0001;

Models of Teverola factory.
AB103TK (27113) Matr. 20408.0001
AB104IT (27913) Matr. 20408.0001;
AB107PT (27094) Matr. 20408.0001;
AB63EX (23909) Matr. 20408.0001;
AB83TK (22503) Matr. 20408.0001;
AB84IT (27914) Matr. 20408.0001;
AB84PT (22484) Matr. 20408.0001;
AB95AUS (23879) Matr. 20408.0001;
AB95EU (23781) Matr. 20408.0001;
AL102PFR (27299) Matr. 20408.0001;
AL109K (23910) Matr. 20408.0001;
AL10UK (23590) Matr. 20408.0001;
AL65PT (27093) Matr. 20408.0001;
LNA855FR (27595) Matr. 20325.0001;
W103NL (24600) Matr. 20314.0001;
W103TTK (23337) Matr. 20408.0001;
W103UK (23334) Matr. 20408.0001;
W104DE (24834) Matr. 20408.0001;
W104FR (23340) Matr. 20408.0001;
W104NL (23386) Matr. 20408.0001;
W104SP (24415) Matr. 20325.0001;
W104TBE (25474) Matr. 20408.0001;
W104TEX (23332) Matr. 20408.0001;
W105FR (27700) Matr. 20408.0001;
W113UK (23335) Matr. 20408.0001;
W63TAUS (25885) Matr. 20408.0001;
W63TEX (24768) Matr. 20408.0001;
W73FR (23329) Matr. 20408.0001;
W83DE (24833) Matr. 20408.0001;
W83NL (24599) Matr. 20313.0001;


W83SP (23317) Matr. 20312.0001;
W83TAUS (25886) Matr. 20408.0001;
W83TEX (23310) Matr. 20318.0001;
W83TK (23320) Matr. 20408.0001;
W83TTK) (23321) Matr. 20408.0001;
W83UK (23302) Matr. 20408.0001;
W85FR (27699) Matr. 20408.0001;
W93TEX (23308) Matr. 20408.0001;
W93UK (23330) Matr. 20408.0001;
W9521E (25379) Matr. 20408.0001;
WA10IT (26880) Matr. 20408.0001;
WA10PT (27641) Matr. 20408.0001;
WA6IT (26878) Matr. 20408.0001;
WA6PT (27639) Matr. 20408.0001;
WA8IT (26879) Matr. 20408.0001;
WA8PT (27640) Matr. 20408.0001;
WP100EX (27761) Matr. 20408.0001;
WP67EX (27757) Matr. 20402.0001.

n1040230: Modified shock absorber bracket - Comunanza plant

From the registration no. 11107.0001, the washing machines and Washer-Dryers produced in the Comunanza factory Plant, have used modified shock absorbers with the bracket that fixes onto the cabinet.
The codes for the new shock absorbers are:
Code 086372 - Shock absorber 120 N (11105);
Code 086515 - Shock absorber 80 N (11105);
The modification also involved the cabinets in the fixing area that for the shock absorbers represent a different type of slotting (see enclosed figure).
To avoid the proliferation of the codes, the modified cabinets are handled with the same SAT code as the pre-modification, when replacing the cabinet you will need to check the registration number of the appliance.
In order to perform a proper task the intervention of the cabinet replacement it is recommended, that at least in the initial phase, to keep both the combination of shock absorbers in stock. The shock absorbers code 066184 and 064503 will continue to be normally handled.

n1040242: Power card with welded eeprom.

From serial number 20304.0001, IDC power card with welded eeprom is used to ensure the perfect connection of all parts, in the Comunanza, Teverola and Brembate factories.
To replace the module with welded eeprom, it will be necessary to use the eeprom indicated in the SAT document of the model concerned.
To replace the module on a unit with welded eeprom both the SAT module and the eeprom are required, because the latter cannot be reused.

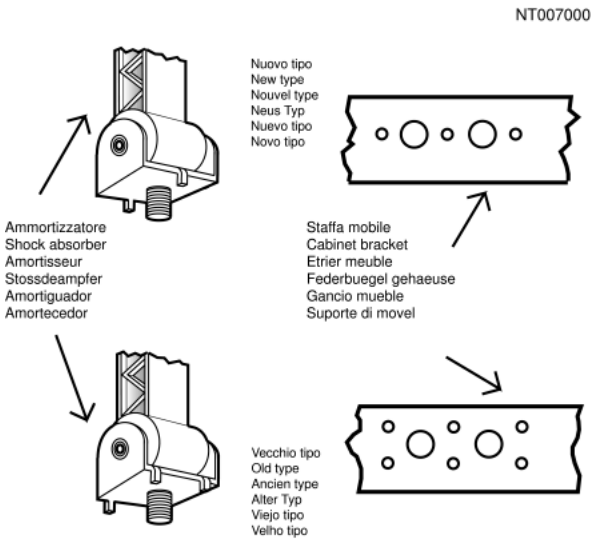

n1040246: Button switch NO

From serial number 20302.0001, the button switch NO code 088394 is used instead of the premodified switch NO+NO code 075445 (see attached illustration) and the button switch SE-NO code 063971 is used instead of the premodified switch SE-NO code 058465 (see attached illustration) on washing machine AL68XPT .
Both switches are regularly managed, therefore in case of repair the serial number of the unit must be taken into consideration.
This modification also regards the wiring code 088448 which as with all the LB 2000 models, is managed only by request, i.e. without stock, in order to always manage the interchangeable one with the last modification.
Due to the simplicity of the modification, the images of the wiring diagrams used remain the same as the IDC wiring diagrams already available on the WEB.
The modification will be also extended to other models which from time to time will be listed below.

COMUNANZA (Codes 063971 e 08394)
A1124UK (23572) Matr. 20318.0001;
A1234UK (23573) Matr. 20318.0001;
A1324UK (28068) Matr. 20318.0001;
AA1000BFR (25700) Matr. 20318.0001;
AAX106LFR (25698) Matr. 20318.0001;
AAX116LFR (25591) Matr. 20318.0001;
AAX126LFR (25699) Matr. 20318.0001;
AB104XTK (22505) Matr. 20318.0001;
AB108XEO (26389) Matr. 20318.0001;
AB108XIT (22443) Matr. 20318.0001;
AB63XGR (24894) Matr. 20318.0001;
AB65XEO (24492) Matr. 20318.0001;
AB67XIT (27896) Matr. 20318.0001;
AB84XTK (22504) Matr. 20318.0001;
AB87XIT (27897) Matr. 20318.0001;
AB88XEX (23681) Matr. 20318.0001;
AB88XIT (22444) Matr. 20318.0001;
ABS66XIT (28070) Matr. 20311.0001;
AL107FR (23684) Matr. 20318.0001;
AL108XBE (23648) Matr. 20318.0001;
AL108XSTK (22698) Matr. 20318.0001;
AL108XTK (22506) Matr. 20318.0001;
AL109SLFR (22495) Matr. 20318.0001;
AL109XAUS (26024) Matr.20318.0001;

AL109XEU (22514) Matr. 20318.0001;
AL109XIT (22360) Matr. 20318.0001;
AL109XSK (25855) Matr. 20318.0001;
AL128XBE (23656) Matr. 20318.0001;
AL129SLBE (23990) Matr. 20318.0001;
AL129XAUS (23864) Matr. 20318.0001;
AL129XEU (22515) Matr. 20318.0001;
AL129XEU (22515) Matr. 20318.0001;
AL129XSK (25856) Matr. 20318.0001;
AL129XTK (22507) Matr. 20318.0001;
AL12SUK (24363) Matr. 20318.0001;
AL12UK (23576) Matr. 20318.0001;
AL67XHCGR (23885) Matr. 20318.0001;
AL68X (22363) Matr. 20318.0001;
AL68X (22363) Matr. 20318.0001;
AL68XEX (23863) Matr. 20318.0001;
AL68XSPT (22977) Matr. 20318.0001;
AL68XSPT (22977) Matr. 20318.0001;
AL78XPT (27627) Matr. 20318.0001;
AL78XSPT (27628) Matr. 20318.0001;
AL88XEU (22512) Matr. 20318.0001;
AL88XPT (22482) Matr 20318.0001;
AL88XSPT (22483) Matr. 20318.0001;
AL89X (22362) Matr. 20318.0001;
AL89XSIT (22445) Matr. 20318.0001;
AL98XPT (27629) Matr. 20318.0001;
AL98XSPT (27630) Matr. 20318.0001;
ALS104XFR (22501) Matr. 20311.0001;
ALS109XEU (22520) Matr. 20311.0001;
ALS109XIT (22470) Matr. 20311.0001;
ALS109XIT (22470) Matr. 20311.0001;
ALS129XEU (22521) Matr. 20311.0001;
ALS68XIT (22473) Matr. 20311.0001;
ALS869XIT (24887) Matr. 20311.0001;
ALS88XEO (26391) Matr. 20311.0001;
ALS88XEU (22519) Matr. 20311.0001;
ALS89XIT (22472) Matr. 20311.0001;
ALS89XIT (22472) Matr. 20311.0001;
ALS89XSIT (22471) Matr. 20311.0001;
L687XIT (24890) Matr. 20318.0001;
L687XIT (24890) Matr. 20318.0001;
LE1069XIT (27895) Matr. 20318.0001;
LE869XIT (24884) Matr. 20318.0001;
LES669XIT (24886) Matr. 20311.0001;
W104TKSTK (24746) Matr. 20318.0001;
W104TXTK (23411) Matr. 20318.0001;
W105TXEX (23403) Matr. 20318.0001;
W105XDE (24835) Matr. 20318.0001;
W106XDE (28089) Matr. 20318.0001;
W108XIT (23402) Matr. 20318.0001;
W108XSP (23408) Matr. 20318.0001;
W123SUK (23413) Matr. 20318.0001;
W123UK (23369) Matr. 20318.0001;
W123XNL (23416) Matr. 20318.0001;
W124XDE (24837) Matr. 20318.0001;
W124XNL (23418) Matr. 20318.0001;
W125TXCH (28194) Matr. 20318.0001;

W125TXEX (23378) Matr. 20318.0001;
W125XDE (24838) Matr. 20318.0001;
W125XFR (24435) Matr. 20318.0001;
W125XSDE (24839) Matr. 20318.0001;
W126XDE (24840) Matr. 20318.0001;
W128XFR (27701) Matr. 20318.0001;
W128XSP (24428) Matr. 20318.0001;
W682XSIT (24813) Matr. 20318.0001;
W683XGIT (24812) Matr. 20318.0001;
W68XIT (24408) Matr. 20318.0001;
W68XSIT (24409) Matr. 20318.0001;
W842XSIT (24818) Matr. 20318.0001;
W843XGIT (24820) Matr. 20318.0001;
W84TXEX (23401) Matr. 20318.0001;
W84TXTK (23410) Matr. 20318.0001;
W84XSP (23409) Matr. 20318.0001;
W84XSP (24469) Matr. 20318.0001;
W857XSPT (26661) Matr. 20318.0001.
W88XIT (23395) Matr. 20318.0001;
WA10XIT (26883) Matr. 20318.0001;
WA10XIT (26883) Matr. 20318.0001;
WA6XIT (26881) Matr. 20318.0001;
WA8XIT (26882) Matr. 20318.0001;
WA8XSIT (26919) Matr. 20318.0001;
WAS6XIT (27052) Matr. 20311.0001;
WAS8XIT (27053) Matr. 20311.0001;
WS105TXEX (23356) Matr. 20311.0001;
WS682XSIT (24826) Matr. 20311.0001;
WS683XGIT (24822) Matr. 20311.0001;
WS68XIT (24594) Matr. 20311.0001;
WS84TXEX (23355) Matr. 20311.0001;
WS88XIT (23349) Matr. 20311.0001;


TEVEROLA (Code 063971)
AB40AG (26350) Matr. 20304.0001;
AB40EX (24733) Matr. 20304.0001;
AB40IT (22468) Matr. 20304.0001;
AB43AG (24364) Matr. 20304.0001;
AB43EX50-60HZ (23907) Matr. 20304.0001;
AB43IT (22467) Matr. 20304.0001;
AB43PT (22489) Matr. 20304.0001;
AB43SP (23899) Matr. 20304.0001;
AB52PT (27554) Matr. 20304.0001;
AB53AG (27088) Matr. 20304.0001;
AB53EO (23780) Matr. 20304.0001;
AB53EX50-60HZ (23908) Matr. 20304.0001;
AB53IT (22460) Matr. 20304.0001;
AB56FR (22740) Matr. 20304.0001;
AB60IT (26971) Matr. 20304.0001;
AB63IT (22455) Matr. 20304.0001;
AB64AG (24365) Matr. 20304.0001;
AB64AG (24365) Matr. 20304.0001;
AB64PT (22486) Matr. 20304.0001;
AB66FR (22490) Matr. 20304.0001;
BE563IT (24882) Matr. 20304.0001;
W41IT (27758) Matr. 20304.0001;
W432SIT (24806) Matr. 20304.0001;

W432SIT (24806) Matr. 20304.0001;
W435PT (23319) Matr. 20304.0001;
W43FR (23312) Matr. 20304.0001;
W43IT (23299) Matr. 20304.0001;
W43IT (23299) Matr. 20304.0001;
W43SP (27506) Matr. 20304.0001;
W43SP (27506) Matr. 20304.0001;
W43TAG (23323) Matr. 20304.0001;
W43TAG (23323) Matr. 20304.0001;
W43TEX (23306) Matr. 20304.0001;
W43TEX (23306) Matr. 20304.0001;
W44IT (23294) Matr. 20304.0001;
W44XIT (25547) Matr. 20304.0001;
W4521E (25377) Matr. 20304.0001;
W4521E (25377) Matr. 20304.0001;
W535PT (23385) Matr. 20304.0001;
W53FR (25471) Matr. 20304.0001;
W53IT (23300) Matr. 20304.0001;
W53SP (23338) Matr. 20304.0001;
W53TEX (24767) Matr. 20304.0001;
W53TEX (24767) Matr. 20304.0001;
W543GIT (25688) Matr. 20304.0001;
W630FR (24613) Matr. 20304.0001;
W634PT (24627) Matr. 20304.0001;
W63FR (23341) Matr. 20304.0001;
W63IT (23295) Matr. 20304.0001;
W63SP (23316) Matr. 20304.0001;
W63TEX (23305) Matr. 20304.0001;
W63XIT (25544) Matr. 20304.0001;
W642TXEX (25548) Matr. 20304.0001;
W64IT (24413) Matr. 20304.0001;
W6521E (25378) Matr. 20304.0001;
WA6IT (26878) Matr. 20318.0001;
WA8IT (26879) Matr. 20304.0001;
WP42IT (27759) Matr. 20304.0001;
WP42IT (27759) Matr. 20304.0001;
WP62EX (27760) Matr. 20304.0001;


n1040255: Elimination of post-luminescence.

Elimination of post-luminescence at end of cycle on LB2000 ARISTON / INDESIT washing machines equipped with IDC wiring.
In case of post-luminescence at the end of cycle in the Ariston / Indesit LB 2000 washing machines, the following procedure must be carried out during the intervention phase:
1) Cut approx. 10 cm of the lamp connector wires on the washing machine wiring.
2) Connect the two wires of the specific IDC connector code 089026 (see attached illustration) to the washing machine wiring and check for perfect insulation after finishing taping;
3) Connect the new lamp code 089024 for Indesit or code 089025 for Ariston and refit it on the panel.


Cod. 088394

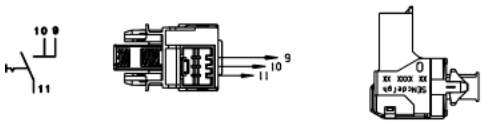


Cod. 075445




Cod. 063971

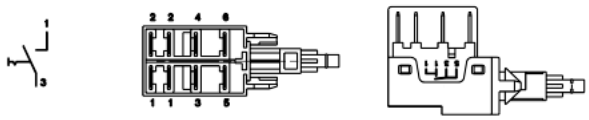

Cod. 058465

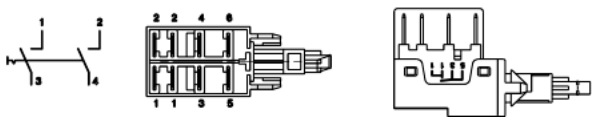

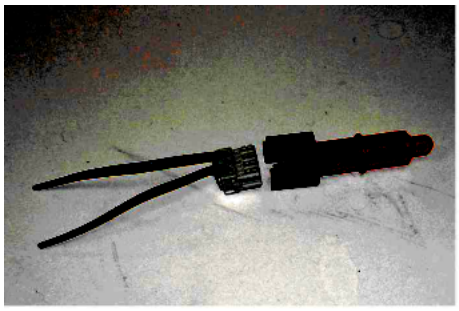

n1040276: Power supply cable + integrally moulded filter.

All appliances produced in the Comunanza (from serial no. 21008.0001), Teverola (from serial no. 21111.0001) and Brembate (from serial no. 21119.0001) factories have been equipped with power supply cables with integrally moulded filter (see fig.1 - 1A and 1B) and new units having a specific opening at the back for fixing the new cables (see fig. 1 - 1C).
The new units, together with the new cables, can be used in place of the premodification ones, by connecting the wiring to the cable, as shown in figure 1 - 1D.
The codes of the new units and of those replaced (ESI - table n1040276fig02), which will be managed until stocks run out, are given below.


The new power supply cables are:
Code 091632 - Power supply cable 3x1 schuko 1.5m+capacitance filter;
Code 091633 - Power supply cable 3x1 schuko 1.5m+inductive filter;
Code 091634 - Power supply cable UK 3x1 l= 1950mm + inductive filter;
Code 091635 - Power supply cable UK 3x1 l=1950mm+capacitance filter;
Code 091636 - Power supply cable l=2.55m AUS+inductive filter;
Code 091641 - Power supply cable l=2550mm AG +capacitance filter;
Code 091642 - Power supply cable 1.85mt SHUKO no inductive filter;
Code 091643 - Power supply cable 3x1 (CH) 1.5m+inductive filter;
Code 091645 - Power supply cable 3450mm SOUTH AF.+capacitance filter;
Code 091690 - Power supply cable shuko l2.55m KOREA+inductive filter;
Code 091689 - Power Supply cable l=2550mm AG+inductive filter.

IMPORTANT: the fixing / continuity screw is a specific self-scraping screw (code 092348) that ensures earth continuity between the filter and the unit. The same screw must be refitted in order to guarantee machine conformity.

The premodification wirings, are also managed for modified products by making the connection to the terminal block of the new cable as shown in fig. 1 - 1D.
The wiring diagrams given in the Documentation remain unchanged.

DESCRIZIONE MOBILI	STABILIMENTO	CODICE SAT MOBILE V.T.	CODICE SAT MOBILE N.T.
MOBILE B.27 'AB40-STAB.46'	TEVEROLA	65974	**90584**
MOBILE BIANCO 'W113(UK)'	TEVEROLA	75417	**90583**
MOBILE BIANCO 'LVB2000'	COMUNANZA	64500	**90582**
MOBILE BIANCO 'ALS-ABS LVB2000'	COMUNANZA	74146	**90581**
MOBILE SILVER 'LVB2000'	COMUNANZA	74184	**90580**
MOBILE SILVER ALS'LVB2000	COMUNANZA	74629	**90579**
MOBILE BIANCO W133(UK)	COMUNANZA	75315	**90578**
MOBILE BIANCO AL148FR'	COMUNANZA	76629	**90577**
MOBILE BIANCO WS63XIT)'	COMUNANZA	76744	**90576**
MOBILE SILVER FIAT 647'W68XSIT'	COMUNANZA	77022	**90575**
MOBILE BIANCO DIALOGIC-2001	COMUNANZA	84310	**90574**
MOBILE BIANCO LBE8X	COMUNANZA	84808	**90573**
MOBILE BIANCO27 INDESIT	BREMBATE	84713	**91748**
MOBILE ARISTON BIANCO27 6KG	BREMBATE	89483	**91742**
MOBILE BIANCO27 6KG '535'	BREMBATE	83287	**91749**
MOBILE BIANCO27 5KG	BREMBATE	81696	**91752**
MOBILE ARISTON BIANCO27 SLIM	BREMBATE	89649	**91754**
MOBILE INDESIT BIANCO27	BREMBATE	89963	**91756**
MOBILE BIANCO27 6KG INDESIT	BREMBATE	91036	**91758**

FIG. 1

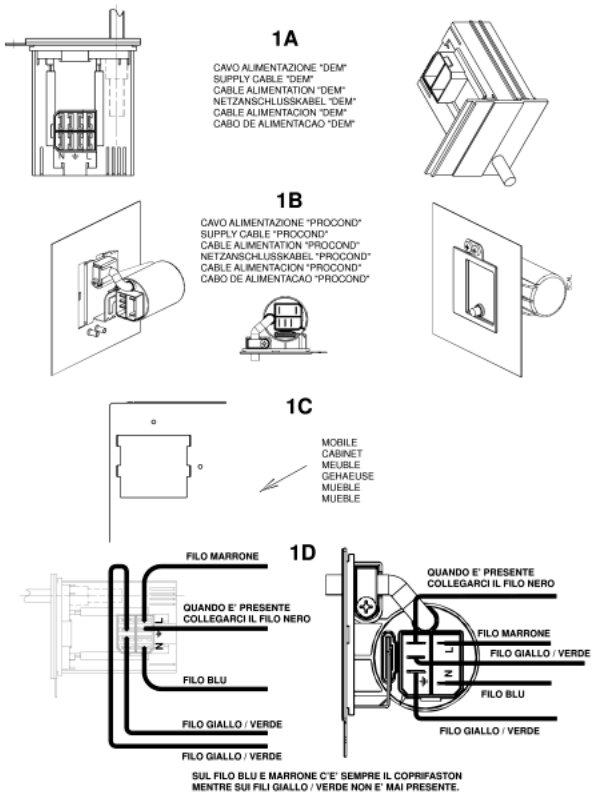

n1040282: New drainage OKO system.

From serial number 21219.0001, the new "OKO" drainage system has been introduced on the washing machines produced in the Comunanza factory.

The last two numbers of the Industrial Code (located on the rating plate) of the models relevant to this note will be 30 (e.g. 80233560130 - see Appendix A)

N.B. The industrial code will not change on the models with induction motor (see following list).

MODEL	INDUSTRIAL CODE
ABS53XIT	80224800000
AB54XPT	80224870100
AB63XEX	80225100100
ABS63XEU	80225180100
WS44XIT	80233440100
WS431TXEX	80233470100
WS642TXEX	80233540100
W63XSP	80233890000
AB53XEU	80238820000
AB65XEU	80238830000
AL 64XSP	80239020100
WS43XIT	80244510000
WS53XIT	80244520000
WH66TXE	80253750100
ABS63XEO	80263900000

The new items are:

- EEPROM (the OKO system requires a new setting of load timing parameters). THE NEW EEPROMS REPLACE ALL THE ONES CODED PREVIOUSLY.
- BOWL (hopper tube hole shifted forwards);
- DETERGENT LOADING TUBE (see fig. 1);
- PRESSURE SWITCH (changed levels);
- OKO PUMP BOWL BLOWER + BALL (see fig. 2A, 2B and 2C);
- CONDUCTIVITY SENSOR (if provided, it is shorter than the premodification item);
- DRAIN PUMP (without detergent collecting tube connection);
- HOPPER (shifted in front of detergent loading tube connection). Fig. 3A post-modification. Fig. 3B premodification);
- AIR TRAP (different shape);
- PRESSURE SWITCH TUBE (different length);
- DRAIN TUBE STOP (specific);

In particular, the OKO system consists of a spherical plastic component inserted in the tube that connects the bowl to the drain pump (see fig.2 A).
At the beginning of each wash cycle the washing machine fills water for 10 seconds and activates the drain pump for 2 seconds. In this way, the water level in the bowl is different from that in the drain tube; this difference increases the thrust of the ball upwards, closing the bowl-pump connection tube hermetically (see fig. 2D).
This system has the double advantage of:
1) separating the wash water and the water in the drain hose, thus saving energy during the heating phase;
2) and ensuring optimal use of all the detergent.
With the introduction of this new component, the detergent collecting tube is no longer required and the pump has one hole only to convey water from the tank.
For the correct operation of the OKO system, it is important that the drain hose of the washing machine remains fixed to the back of the unit with a plastic clamp (to this end, the clamp withstands a 25 kg load; see reference 1 in fig. 4); otherwise, the drain hose must absolutely reach the height of the clamp. (minimum 60 cm.)













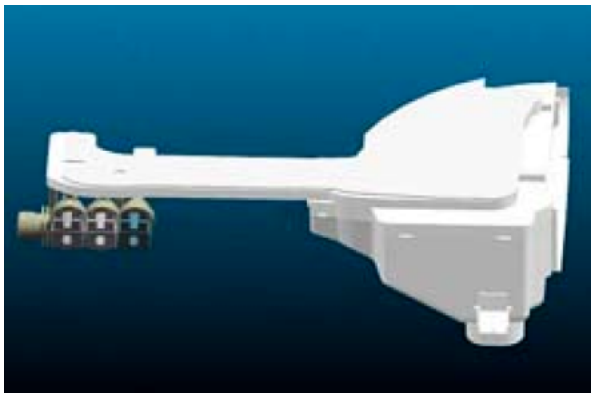



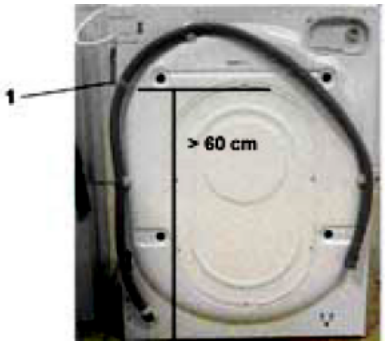

n1040286: Shock absorbers with 8.15 mm fixing hole.

From serial number 30127.0001, for appliances produced in the Comunanza factory, the shock absorbers will be fixed to the tank unit cradle using: the 8 mm diameter screw code 093750 in place of the 10 mm screw code 030446, and related locking nut code 030443 in place of code 030680.
The items affected by this modification are:
Code 093848 - Tank unit cradle 46 lt ;
Code 093878 - Tank unit cradle 40 lt.
Code 093884 - Shock absorber 80 N
Code 093885 - Shock absorber 120 N

The premodified shock absorbers code 086515 and 086372 will continue to be used, whereas cradles code 064518 and 066074 will be used until stocks run out, after which they will be replaced with the new items after widening the shock absorber fixing holes to a diameter of 11 mm.

n1040291: Interchangeability of bowls on LB2000 appliances Comunanza..

The Comunanza factory has modified the oscillating unit on all the 2000 range models produced in the Comunanza factory:
a) From serial number 21219.0001, the LB 2000 EVO bowl (see fig. 02) is gradually replacing the LB2000 version (see fig. 01), with the following differences:

1) Detergent loading tube hole shifted forwards;
2) Elimination of detergent recovery tube hole.

This modification has involved the introduction of the following items:

· Detergent loading tube (washing machine SAT code 092161and combined washer-dryer SAT code 092273);
· OKO pump bowl tube (models code 092174, Snella models with induction motor code 094312);
· Hopper (for rotary slide drawer SAT code 092176, for linear slide drawer code 092314);

b) From serial number 30312.0001, all washing machines produced in the Comunanza factory have been equipped with the new LB2000 EVO II range bowl (see fig. 03), in place of the LB2000 EVO version (see fig. 02), with the following difference:

1) Porthole with a diameter of 30 cm instead of 28 cm;

This modification has involved the introduction of the following items:


· Tapered porthole seal - rear diameter 30 cm front 28 cm;
Code 093345 - Standard seal;
Code 094091 - Washer-dryer seal;
Code 094093 - Snella seal
· Porthole seal rear fixing ring for 30 cm diameter SAT code 092155;
· Front counterweight (SAT code 092178).


Two LB2000 Evo bowl codings have been created in order to reduce the number of bowls managed by the After-sales Service (see fig. 04):
1) LB2000 Evo bowl kit coding (Table 01);
2) LB2000 EVO II range bowl kit coding (Table 02);

All bowl codes (with related interchangeability), are indicated in fig. 04 TAB. 03 attached to this Note.


Starting from serial number 30325.0001, for all the versions of Evizzate SNELLA LB2000 washing machines produced in the Comunanza factory the diameter of tapered porthole must seal return 28 cm. Starting from this serial number all the washing machines must be supported with door seal and fixing ring in old version.


Starting from serial number 30616.0001, for all the washing machines Evizzate LB2000 produced in Comunanza, the diameter of tapered porthole must seal return 28 cm. Starting from this serial number all the washing machines must be supported with door seal and fixing ring in old version.


		CUBA LB 2000	CUBA LB 2000 EVOLUCIONADA
EN PRODUCCION		Matricula MENOR (<) 21218.0001	Matricula Entre 21219.0001 y 30312.0001
		Fig. 01 	Fig. 02 
		MODIFICACIONES	Agujero tubo detergente puesto en parte delantera Eliminado tubo recuperación detergente Modificado tubo de cuba a bomba (Sistema OKO) Modificada forma tubo de jabonera a cuba Modificada salida de jabonera
SERVICIO TECNICO	CUBA OBSOLETO		
	064513 077330	KIT 092414	
	061827	KIT 092421	
	074217	KIT 092257	
	080661	KIT 092263	
	084591	KIT 092415	
	076778	KIT 092452	
	076850	KIT 092545	
	078876 074134	KIT 092311	


		VASCA LB 2000	VASCA LB 2000 EVIZZATA
IN PRODUZIONE		Matricola Minore (<) 21218.0001	Matricole dal 21219.0001 al 30311.0001
		FIG.01 	FIG. 02 
		MODIFICHE	Vaschetta detersivo, attacco tubo spostato più anteriormente Eliminato tubo recupero detersivo Modificato tubo vasca pompa (Sistema OKO) Modificata forma del tubo carico detersivo Vasca, foro tubo carico detersivo spostato più anteriormente
SERVIZIO TECNICO	VASCHE IN OBSOLESCENZA LB2000	TAB.01 – KIT VASCHE LB 2000 E LB2000 EVIZZATE	
	064513 077330	KIT 092414	
	061827	KIT 092421	
	074217	KIT 092257	
	080661	KIT 092263	
	084591	KIT 092415	
	076778	KIT 092452	
	076850	KIT 092545	
	078876 074134	KIT 092311	

		CUBA LB 2000	CUBA LB 2000 EVIZZATA
EM PRODUÇÃO		Matrículas inferiores (<) 21218.0001	Matrículas de 21219.0001 a 30311.0001
		FIG.01 	FIG. 02 
		MODIFICAÇÕES	Gaveta detergente, buraco do tubo deslocado anteriormente Eliminado tubo de recuperação de detergente Modificado tubo cuba à bomba (Sistema OKO) Modificada forma do tubo de detergente Cuba, buraco do tubo de detergente deslocado anteriormente
SERVIÇO TÉCNICO	CUBAS A ACABAR LB2000	TAB.01 – KIT CUBAS LB 2000 E LB2000 EVIZZATE	
	064513 077330	KIT 092414	
	061827	KIT 092421	
	074217	KIT 092257	
	080661	KIT 092263	
	084591	KIT 092415	
	076778	KIT 092452	
	076850	KIT 092545	
	078876 074134	KIT 092311	


		TUB LB 2000	TUB LB 2000 EVIZZATA
IN PRODUCTION		Serial N.Lower than (<) 21218.0001	Serial N. from 21219.0001 to 30311.0001
		FIG.01 	FIG. 02 
		CHANGES	Detergent drawer, tube connection shifted of Forwards; Elimination of detergent recovery tube hole Change of tub pipe pump (OKO System) ch'ange of shape of detergent loading tub Tub, detergent loading tube hole moved forwards.
TECHNICAL SERVICE	TUBS TO BECOME OBSOLETE LB2000	TAB.01 – KIT TUBS LB 2000 E LB2000 EVIZZATE	
	064513 077330	KIT 092414	
	061827	KIT 092421	
	074217	KIT 092257	
	080661	KIT 092263	
	084591	KIT 092415	
	076778	KIT 092452	
	076850	KIT 092545	
	078876 074134	KIT 092311	

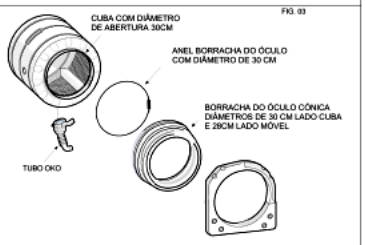EM PRODUÇÃO	CUBA EVO II	
	Matrículas inferiores (>) 30312.0001	
	FIG. 03  	
	Modificado diâmetro de abertura da cuba 30 cm em vez de 28 cm Modificada borracha do óculo forma cônica (30 cm lado cuba / 28 cm lado móvel Modificado anel posterior para diâmetro 30 cm.	
SERVIÇO TÉCNICO		**TAB. 02 – KIT CUBAS EVO II**
		KIT 094273
		KIT 094276
		KIT 094279
		KIT 094281
		KIT 094283
		KIT 094286
		KIT 094287
		KIT 094289

EN PRODUCCION	CUBA EVO II	
	Matricula MAYOR (>) 30312.0001	
	Fig. 03  	
	Modificado diâmetro boca de cuba 30 cm en vez de 28 cm Modificada goma escotilla con forma cónica (30 cm en cuba / 28 cm en riuetble Modificado Anillo para diámetro 30 cm.	
SERVICIO TECNICO		**KIT 094273**
		KIT 094276
		KIT 094279
		KIT 094281
		KIT 094283
		KIT 094286
		KIT 094287
		KIT 094289

IN PRODUZIONE	**VASCA EVO II**
	Matricola Maggiore (>) 30312.0001
	FIG. 03 
	Modificato diametro bocca vasca 30 cm invece di 28 cm Modificata guarnizione oblò di forma tronco-conica (30 cm lato vasca / 28 cm lato mobile Modificato anello posteriore per diametro 30 cm.

SERVIZIO TECNICO	**TAB. 02 – KIT VASCHE EVO II**
	KIT 094273
	KIT 094276
	KIT 094279
	KIT 094281
	KIT 094283
	KIT 094286
	KIT 094287
	KIT 094289

IN PRODUCTION	**TUB EVO II**
	Serial N. Bigger than (>) 30312.0001
	FIG. 03 
	Changed diameter of tubhole from 30 cm to 28 cm; Changed door basket, truncated cone-sharped,(30 cm tub side /28 cm cabinet side) ; Changed rear ring for 30 cm diameter.

TECHNICAL SERVICE	**TAB. 02 – KIT TUBS EVO II**
	KIT 094273
	KIT 094276
	KIT 094279
	KIT 094281
	KIT 094283
	KIT 094286
	KIT 094287
	KIT 094289

TAB. 03
COMPOSIZIONE DEI KIT


KIT VASCHE LB 2000 E LB 2000 EVIZZATE	
Cod. kit	Composto da:
092414	094272 Vasca SAT EVO II + kit 093772
092421	094277 Vasca SAT EVO II + kit 094097
092257	094278 Vasca SAT EVO II + kit 093772
092263	094280 Vasca SAT EVO II + kit 094097
092415	094282 Vasca SAT EVO II + kit 093772
092452	094285 Vasca SAT EVO II + kit 093772
092545	094288 Vasca SAT EVO II + kit 093772
092311	094290 Vasca SAT EVO II + kit 094098

Cod. kit	Composto da:
093772	093345 - GUARNIZ. OBLO' STANDARD EVIZZ.EVO0; 092155 - ANELLO POST. FISS. GUARNIZIONE; 027924 - TAPPO CARICO DETERSIVO; 091148 - FASCETTA TAPPO TUBO REC. DETERSO; 091901 - TAPPO FORO TUBO RECUPERO DETERS.
094097	094091 - GUARNIZ.OBLO' WD INC.IND. EVIZZ.EVO0; 092155 - ANELLO POST. FISS. GUARNIZIONE; 027924 - TAPPO CARICO DETERSIVO; 091148 - FASCETTA TAPPO TUBO REC. DETERS. 091901 - TAPPO FORO TUBO RECUPERO DETERS.

KIT VASCHE EVO II	
Cod. kit	Composto da:
094273	094272 Vasca SAT EVO II + kit 094275
094276	094277 Vasca SAT EVO II + kit 094275
094279	094278 Vasca SAT EVO II + kit 094275
094281	094280 Vasca SAT EVO II + kit 094275
094283	094282 Vasca SAT EVO II + kit 094275
094286	094285 Vasca SAT EVO II + kit 094275
094287	094288 Vasca SAT EVO II + kit 094275
094289	094290 Vasca SAT EVO II + kit 094275

Cod. kit	Composto da:
094275	027924 - TAPPO CARICO DETERSIVO; 091148 - FASCETTA TAPPO FORO REC. DETERSIVO; 091901 - TAPPO FORO TUBO RECUPERO DETERS.
094098	094093 - GUARNIZ. OBLO' SNELLA EVIZZ.-EVO0; 092155 - ANELLO POST. FISS. GUARNIZIONE; 027924 - TAPPO CARICO DETERSIVO; 091148 - FASCETTA TAPPO REC. DETERS; 091901 - TAPPO FORO RECUPERO DETERS.

FIG. 04
VASCHE SAT



IMPIEGANDO LA VASCA SAT SU MODELLI LB 2000 E LB 2000 EVIZZATE OCCORRE OBBLIGATORIAMENTE APPLICARE PRIMA LA GUARNIZIONE OBLO' E SUCCESSIVAMENTE IL CONTRAPPESO ANTERIORE.

TAB. 03
COMPOSIÇÃO DOS KIT


KIT CUBAS LB 2000 E LB 2000 EVIZZATE	
Cod. kit	Composto por:
092414	094272 Cuba SAT EVO II + kit 093772
092421	094277 Cuba SAT EVO II + kit 094097
092257	094278 Cuba SAT EVO II + kit 093772
092263	094280 Cuba SAT EVO II + kit 094097
092415	094282 Cuba SAT EVO II + kit 093772
092452	094285 Cuba SAT EVO II + kit 093772
092545	094288 Cuba SAT EVO II + kit 093772
092311	094290 Cuba SAT EVO II + kit 094098

Cod. kit	Composto por:
093772	093345 - BORRACHA DO OCULO LB STANDARD; 092155 - ANEL DE TENSAO POSTERIOR; 027924 - TAPON CUBA; 091148 - ABRAZADERA D=79 MM; 091901 - TAPON CUBA X TUBO DE RECUP.DETER.
094097	094091 - BORRACHA DO OCULO WD. EVIZZ.EVO0; 092155 - ANEL DE TENSAO POSTERIOR; 027924 - TAPON CUBA; 091148 - ABRAZADEIRA D=79 MM; 091901 - TAPON CUBA X TUBO DE RECUPERACAO DETER.

KIT CUBAS EVO II	
Cod. kit	Composto por:
094273	094272 Cuba SAT EVO II + kit 094275
094276	094277 Cuba SAT EVO II + kit 094275
094279	094278 Cuba SAT EVO II + kit 094275
094281	094280 Cuba SAT EVO II + kit 094275
094283	094282 Cuba SAT EVO II + kit 094275
094286	094285 Cuba SAT EVO II + kit 094275
094287	094288 Cuba SAT EVO II + kit 094275
094289	094290 Cuba SAT EVO II + kit 094275

Cod. kit	Composto por:
094275	027924 - TAPON CUBA; 091148 - ABRAZADERA D=79 MM; 091901 - TAPON CUBA X TUBO DE RECUPERACAO DETER.
094098	094093 - BORRACHA DO OCULO LB ALS-EVIZZI EVO0; 092155 - ANEL DE TENSAO POSTERIOR; 027924 - TAPON CUBA; 091148 - ABRAZADEIRA D=79 MM; 091901 - TAPON CUBA X TUBO DE RECUP.DETER.

FIG. 04
CUBAS SAT



QUANDO SE UTILIZA A CUBA SAT NOS MODELOS LB2000 E LB 2000 EVIZZATE, TER ATENÇÃO QUE EM PRIMEIRO LUGAR SE DEVE COLOCAR A BORRACHA DO ÓCULO E DE SEGUIDA O CONTRAPESO ANTERIOR.


TAB. 01

COMPOSICION DE LOS KIT			
Cód. kit	Compuesto por:	Cód. kit	Compuesto por:
092414	094272 Cuba EVO II + kit 093772	094273	094272 Cuba EVO II + kit 094275
092421	094277 Cuba EVO II + kit 094097	094276	094277 Cuba EVO II + kit 094275
092257	094278 Cuba EVO II + kit 093772	094279	094278 Cuba EVO II + kit 094275
092263	094280 Cuba EVO II + kit 094097	094281	094280 Cuba EVO II + kit 094275
092415	094282 Cuba EVO II + kit 093772	094283	094282 Cuba EVO II + kit 094275
092452	094285 Cuba EVO II + kit 093772	094286	094285 Cuba EVO II + kit 094275
092545	094288 Cuba EVO II + kit 093772	094287	094288 Cuba EVO II + kit 094275
092311	094290 Cuba EVO II + kit 094098	094289	094290 Cuba EVO II + kit 094275

Cód. kit	Compuesto por:
093772	093345 - GUARNIZ. OBLO' STANDARD EVIZZ-EVOII 092155 - ANELLO POST. FISS. GUARNIZIONE 027924 - TAPPO CARICO DETERSIVO 091148 - FASCETTA TAPPO TUBO REC. DETERSIVO 091901 - TAPPO FORO TUBO RECUPERO DETERSIVO.
094097	094091 - GUARNIZ. OBLO' WD - INC. IND. EVIZZ.-EVO II 092155 - ANELLO POST. FISS. GUARNIZIONE 027924 - TAPPO CARICO DETERSIVO 091148 - FASCETTA TAPPO TUBO REC. DETERSIVO 091901 - TAPPO FORO TUBO RECUPERO DETERSIVO.
094098	094093 - GUARNIZ. OBLO' SNELLA EVIZZ.-EVOII 092155 - ANELLO POST. FISS. GUARNIZIONE 027924 - TAPPO CARICO DETERSIVO 091148 - FASCETTA TAPPO TUBO REC. DETERSIVO 091901 - TAPPO FORO TUBO RECUPERO DETERSIVO.

Cód. kit	Compuesto por:
094275	027924 - TAPPO CARICO DETERSIVO 091148 - FASCETTA TAPPO TUBO REC. DETERSIVO 091901 - TAPPO FORO TUBO RECUPERO DETERSIVO.

FIG. 04
VASCHE SAT




IMPIEGANDO LA VASCA SAT SU MODELLI LB 2000 E LB 2000 EVIZZATE OCCORRE OBBLIGATORIAMENTE APPLICARE PRIMA LA GUARNIZIONE OBLO' E SUCCESSIVAMENTE IL CONTRAPPESO ANTERIORE.

TAB. 03
KIT COMPOSITION

KIT TUBS LB 2000 AND LB 2000 EVIZZATE	
Kit Cod.	Made of:
092414	094272 Tub SAT EVO II + kit 093772
092421	094277 Tub SAT EVO II + kit 094097
092257	094278 Tub SAT EVO II + kit 093772
092263	094280 Tub SAT EVO II + kit 094097
092415	094282 Tub SAT EVO II + kit 093772
092452	094285 Tub SAT EVO II + kit 093772
092545	094288 Tub SAT EVO II + kit 093772
092311	094290 Tub SAT EVO II + kit 094098
Kit Cod.	Made of:
093772	093345 - DOOR BELLOWS SEAL STD EVIZZ.EVOII; 092155 - BELLOWS CLAMP (TANK FRONT); 027924 - BLANKING PLUG; 091148 - CLAMP D=79 MM; 091901 - BLANKING PLUG DET. RECOVERY-HOSE.
094097	094091 - DOOR BELLOWS SEAL WDEVIZZ.EVOII; 092155 - BELLOWS CLAMP (TANK FRONT); 027924 - BLANKING PLUG; 091148 - CLAMP D=79 MM; 091901 - BLANKING PLUG DET. RECOVERY-HOSE.

KIT TUBS EVO II	
Kit Cod.	Made of:
094273	094272 Tub SAT EVO II + kit 094275
094276	094277 Tub SAT EVO II + kit 094275
094279	094278 Tub SAT EVO II + kit 094275
094281	094280 Tub SAT EVO II + kit 094275
094283	094282 Tub SAT EVO II + kit 094275
094286	094285 Tub SAT EVO II + kit 094275
094287	094288 Tub SAT EVO II + kit 094275
094289	094290 Tub SAT EVO II + kit 094275
Kit Cod.	Made of:
094275	027924 - BLANKING PLUG; 091148 - CLAMP D=79 MM; 091901 - BLANKING PLUG DET. RECOVERY-HOSE.
094098	094093 - DOOR BELLOWS SEAL LB ALS - WS.-EVOII; 092155 - BELLOWS CLAMP (TANK FRONT); 027924 - BLANKING PLUG; 091148 - CLAMP D=79 MM; 091901 - BLANKING PLUG DET. RECOVERY-HOSE.

FIG. 04
TUBS SAT




WHILE USING SAT TUB INTO MODEL LB2000 AND LB2000 EVIZZAE, THE DOOR GASCKET MUST BE APPLIED AND LATER ON THE FRONT NOTERWIGHT.

n1040325: New shock absorber fixing system with pin

From serial no. 40427.0001, shock absorbers have been fixed to the tank unit cradle with two 11 mm pins code C00110163 (see fig. 01 and 02 enclosed) in place of the 8 mm screws code 093750 and relevant locking nuts code 030443, on all washing machines and dryers produced in the Comunanza factory.
The items affected by this modification are:
1) The cradles have the same Service code, as they can be used in place of the new ones after widening the shock absorber fixing holes to a diameter of 10 mm.

Code 093848 - Tank unit cradle 46 lt
Code 093878 - Tank unit cradle 40 lt.
2) The new shock absorbers, with fixing bushing having no s/steel spacer, are not managed as they are interchangeable with the premodified items (make sure they are CIMA type, as the managed items), fixed with M8 screws code 093750 and related locking nut code 030443 (see figs. 05 and 06).
Code 093884 - Shock absorber 80 N
Code 093885 - Shock absorber 100 N

To remove the shock absorber from the tank, first extract the pin with a few hammer taps (see fig.03) until it is aligned with the tank bracket and then pull it out with a pair of pliers (see fig. 04).
(To refit the shock absorber use a new pin. Insert the pin until the toroidal edge is aligned with the bracket.)

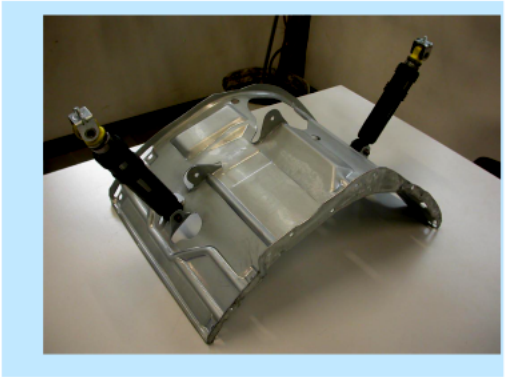














Electric schemes and links


Cod. ce012300


CE012300

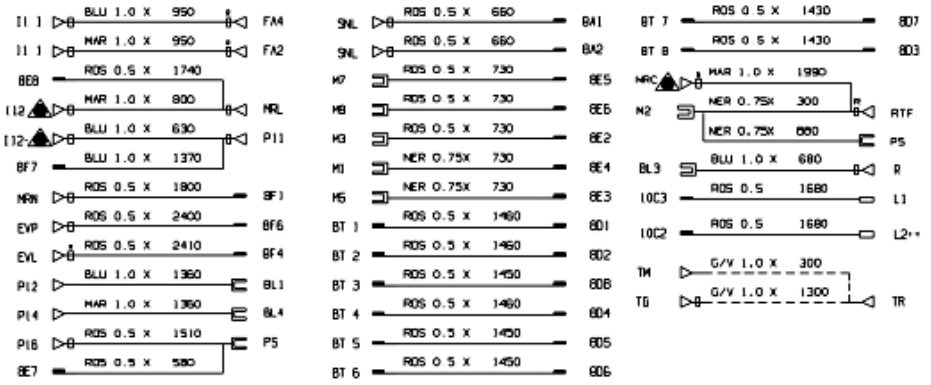

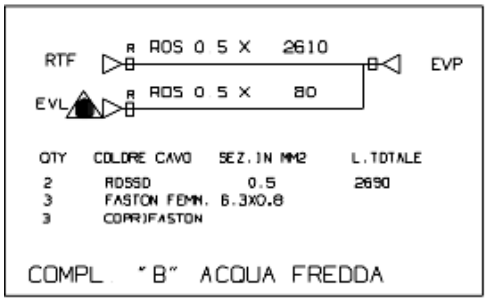

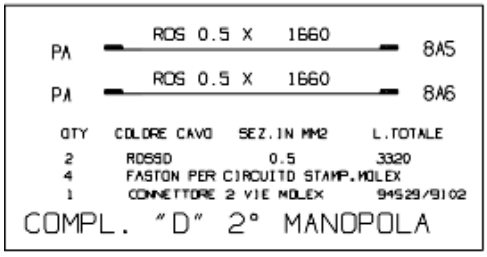

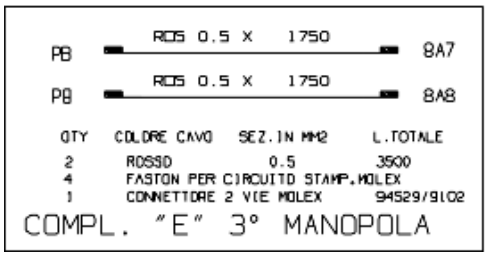

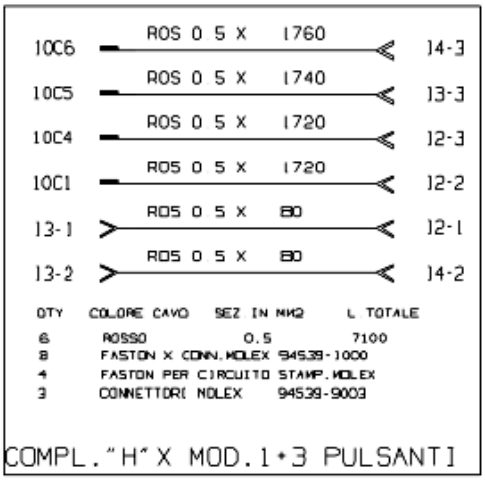



Legend


Legend: ce012300

AQS	Aquastop electrovalve	Mzbn/MTA	zbn timer motor
B	Buzzer	N	Neutral or Terminal Board
BC	Blocco Cesto	NC	Spin cycle exclusion
BF	Terminal board contact, motor fan and dryer	P	Pressure switch
BP	Buzzer	P1	1st level pressure cut-off switch
C	Condensator	P2	2nd level pressure cut-off switch
CA	Condensator	PA	High speed potentiometer
DV	Switching device	PB	Low speed potentiometer
EF/CL	Electro-Valve Cold Water / Bleach	PL	Pure Wool
EF/L	Electro-Valve Cold Water / Wash	PM	Motor Thermoprotector
EF/P	Electro-Valve Cold Water / Prewash	PR	Timer programmer or Pressure switch
ER	Exclude Heating Element	PS	Drain pump
ET	Thermostat disactivation	R	Heating element
EV	Electrovalve	RE	Relay
EVA	Dryer electrovalve	RR	Heating element
EVC	Hot water electrovalve	RV	Speed regulator
EVF	Elettrovalvola acqua fredda	Ras/RA	Dryer heating element
EVL	Wash electrovalve	S	LED
EVP	Pre Wash electrovalve	SL	Line LED
FA	Antijamming filter	SO	Door LED
FD	Delicate drying cycle thermostat	SR	Heating LED
FE	Strong drying cycle thermostat	ST	Temperature selector
FRT	Thermofusible Heating Element	SV	Speed Selector for Spin
I	Inverter	T	Timer contacts
I1..2..3..	Switches/switching devices	TA	Drying timer contacts
IA	Switch On/Off	TB	Low Temperature Thermostat
IC	Switch N.C. - 1/2 Load	TC	Spider wheel earth
ID	Switch display	TFL	Flange earth
IE	Water Saving Device	TG	Main earth
IF	Switch - Spin Reduction	TH	Thermostat
IP	Door switch	TH1	1st temperature thermostat
IR	Line switch	TH2	2nd temperature thermostat
IS	Water-stop	TH3	3rd temperature thermostat

L	Line or Lamp	THF	Operating thermostat
LB	Low Level	THR	Adjustable thermostat
LN	Normal Level	TM	Motor earth
LS	Pilot lamp	TMB	Main cabinet earth
M	Earth-symbol	TMP	Motor thermal protector
MC	Spin cycle motor	TMS	Thermostop
MI	MOTOR WITH PULLEY	TP	Thermal protector
ML	Wash cycle motor	TPS	Drain pump earth
MO	Terminal Board	TR	Heating element earth
MP	Door dip-switch	TS	Safety thermostat
MR	Thermal Lock	TT	Timer earthing connection
MT	Timer motor	TTH	Earthing Thermostat
MV	Motor fan	TV	Tank earth
MV -Ras	Dryer heating element	ZBN	Timer

Electric schemes and links

Cod. ce043300

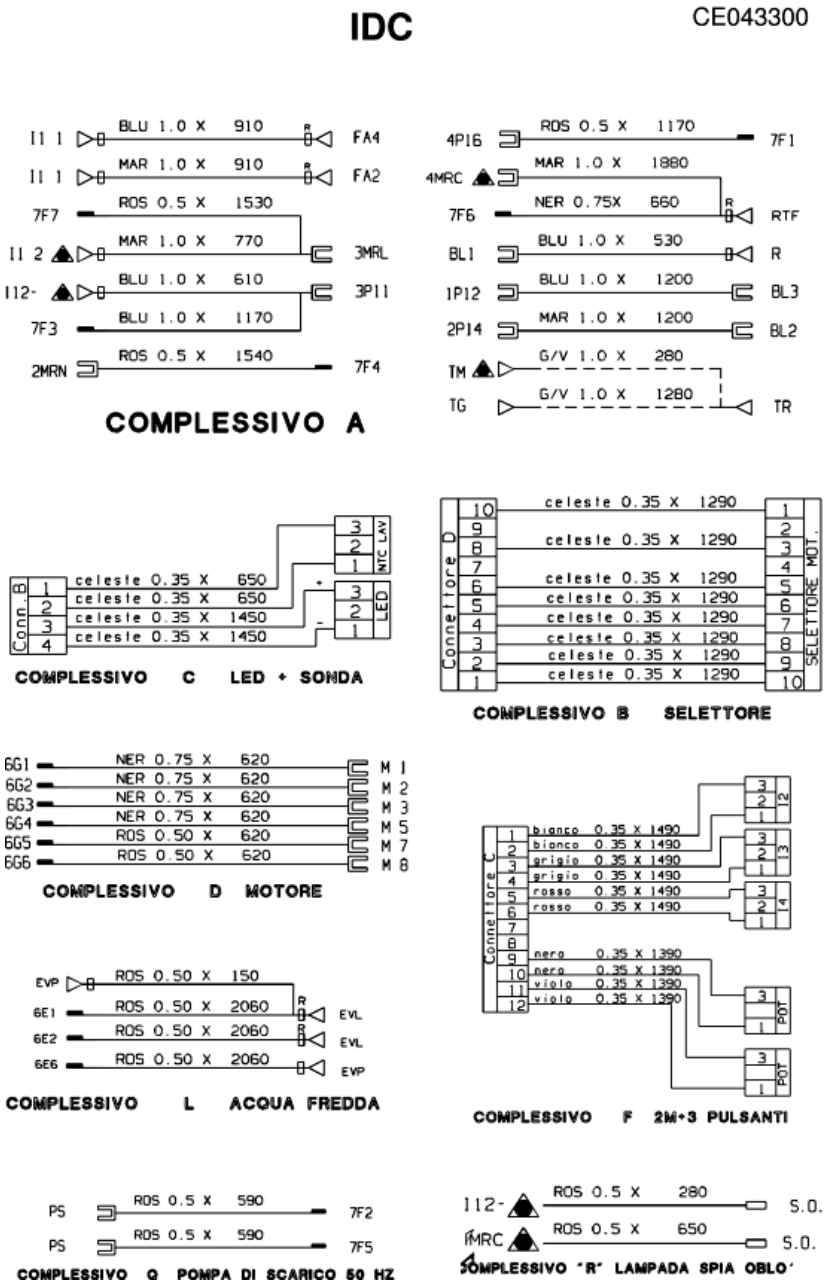

Legend

Legend: ce043300

AQS	Aquastop electrovalve	Mzbn/MTA	zbn timer motor
B	Buzzer	N	Neutral or Terminal Board
BC	Blocco Cesto	NC	Spin cycle exclusion
BF	Terminal board contact, motor fan and dryer	P	Pressure switch
BP	Buzzer	P1	1st level pressure cut-off switch
C	Condensator	P2	2nd level pressure cut-off switch
CA	Condensator	PA	High speed potentiometer
DV	Switching device	PB	Low speed potentiometer
EF/CL	Electro-Valve Cold Water / Bleach	PL	Pure Wool
EF/L	Electro-Valve Cold Water / Wash	PM	Motor Thermoprotector
EF/P	Electro-Valve Cold Water / Prewash	PR	Timer programmer or Pressure switch
ER	Exclude Heating Element	PS	Drain pump
ET	Thermostat disactivation	R	Heating element
EV	Electrovalve	RE	Relay
EVA	Dryer electrovalve	RR	Heating element
EVC	Hot water electrovalve	RV	Speed regulator
EVF	Elettrovalvola acqua fredda	Ras/RA	Dryer heating element
EVL	Wash electrovalve	S	LED
EVP	Pre Wash electrovalve	SL	Line LED
FA	Antijamming filter	SO	Door LED
FD	Delicate drying cycle thermostat	SR	Heating LED
FE	Strong drying cycle thermostat	ST	Temperature selector
FRT	Thermofusible Heating Element	SV	Speed Selector for Spin
I	Inverter	T	Timer contacts
I1..2..3..	Switches/switching devices	TA	Drying timer contacts
IA	Switch On/Off	TB	Low Temperature Thermostat
IC	Switch N.C. - 1/2 Load	TC	Spider wheel earth
ID	Switch display	TFL	Flange earth
IE	Water Saving Device	TG	Main earth
IF	Switch - Spin Reduction	TH	Thermostat
IP	Door switch	TH1	1st temperature thermostat
IR	Line switch	TH2	2nd temperature thermostat
IS	Water-stop	TH3	3rd temperature thermostat

L	Line or Lamp	THF	Operating thermostat
LB	Low Level	THR	Adjustable thermostat
LN	Normal Level	TM	Motor earth
LS	Pilot lamp	TMB	Main cabinet earth
M	Earth-symbol	TMP	Motor thermal protector
MC	Spin cycle motor	TMS	Thermostop
MI	MOTOR WITH PULLEY	TP	Thermal protector
ML	Wash cycle motor	TPS	Drain pump earth
MO	Terminal Board	TR	Heating element earth
MP	Door dip-switch	TS	Safety thermostat
MR	Thermal Lock	TT	Timer earthing connection
MT	Timer motor	TTH	Earthing Thermostat
MV	Motor fan	TV	Tank earth
MV -Ras	Dryer heating element	ZBN	Timer

Electric schemes and links

Cod. lg038100



Legend


Legend: lg038100

AQS	Aquastop electrovalve	Mzbn/MTA	zbn timer motor
B	Buzzer	N	Neutral or Terminal Board
BC	Blocco Cesto	NC	Spin cycle exclusion
BF	Terminal board contact, motor fan and dryer	P	Pressure switch
BP	Buzzer	P1	1st level pressure cut-off switch
C	Condensator	P2	2nd level pressure cut-off switch
CA	Condensator	PA	High speed potentiometer
DV	Switching device	PB	Low speed potentiometer
EF/CL	Electro-Valve Cold Water / Bleach	PL	Pure Wool
EF/L	Electro-Valve Cold Water / Wash	PM	Motor Thermoprotector
EF/P	Electro-Valve Cold Water / Prewash	PR	Timer programmer or Pressure switch
ER	Exclude Heating Element	PS	Drain pump
ET	Thermostat disactivation	R	Heating element
EV	Electrovalve	RE	Relay
EVA	Dryer electrovalve	RR	Heating element
EVC	Hot water electrovalve	RV	Speed regulator
EVF	Elettrovalvola acqua fredda	Ras/RA	Dryer heating element
EVL	Wash electrovalve	S	LED
EVP	Pre Wash electrovalve	SL	Line LED
FA	Antijamming filter	SO	Door LED
FD	Delicate drying cycle thermostat	SR	Heating LED
FE	Strong drying cycle thermostat	ST	Temperature selector
FRT	Thermofusible Heating Element	SV	Speed Selector for Spin
I	Inverter	T	Timer contacts
I1..2..3..	Switches/switching devices	TA	Drying timer contacts
IA	Switch On/Off	TB	Low Temperature Thermostat
IC	Switch N.C. - 1/2 Load	TC	Spider wheel earth
ID	Switch display	TFL	Flange earth
IE	Water Saving Device	TG	Main earth
IF	Switch - Spin Reduction	TH	Thermostat
IP	Door switch	TH1	1st temperature thermostat
IR	Line switch	TH2	2nd temperature thermostat
IS	Water-stop	TH3	3rd temperature thermostat

L	Line or Lamp	THF	Operating thermostat
LB	Low Level	THR	Adjustable thermostat
LN	Normal Level	TM	Motor earth
LS	Pilot lamp	TMB	Main cabinet earth
M	Earth-symbol	TMP	Motor thermal protector
MC	Spin cycle motor	TMS	Thermostop
MI	MOTOR WITH PULLEY	TP	Thermal protector
ML	Wash cycle motor	TPS	Drain pump earth
MO	Terminal Board	TR	Heating element earth
MP	Door dip-switch	TS	Safety thermostat
MR	Thermal Lock	TT	Timer earthing connection
MT	Timer motor	TTH	Earthing Thermostat
MV	Motor fan	TV	Tank earth
MV -Ras	Dryer heating element	ZBN	Timer

Electric schemes and links

Cod. se034600

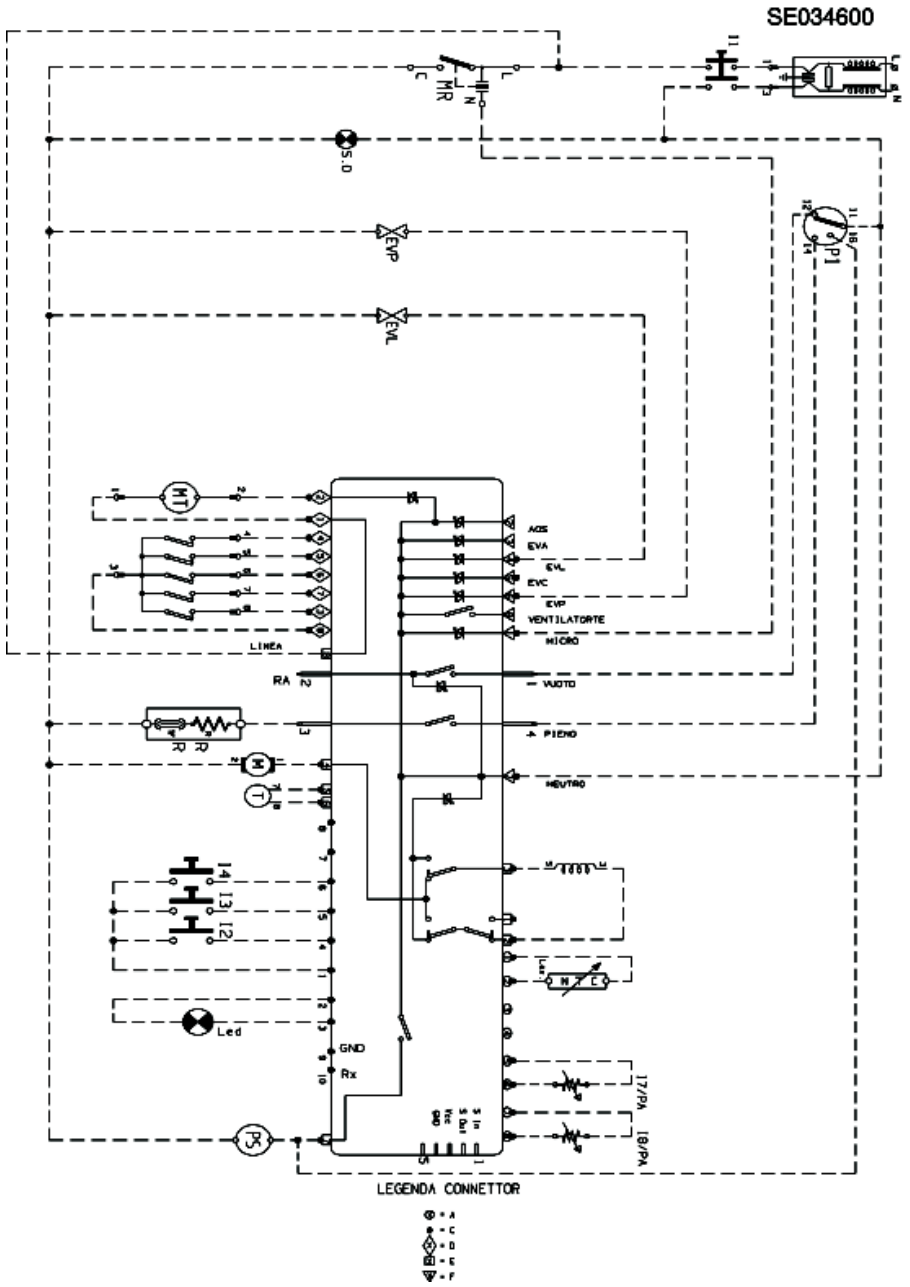

Legend


Legend: se034600

AQS	Aquastop electrovalve	Mzbn/MTA	zbn timer motor
B	Buzzer	N	Neutral or Terminal Board
BC	Blocco Cesto	NC	Spin cycle exclusion
BF	Terminal board contact, motor fan and dryer	P	Pressure switch
BP	Buzzer	P1	1st level pressure cut-off switch
C	Condensator	P2	2nd level pressure cut-off switch
CA	Condensator	PA	High speed potentiometer
DV	Switching device	PB	Low speed potentiometer
EF/CL	Electro-Valve Cold Water / Bleach	PL	Pure Wool
EF/L	Electro-Valve Cold Water / Wash	PM	Motor Thermoprotector
EF/P	Electro-Valve Cold Water / Prewash	PR	Timer programmer or Pressure switch
ER	Exclude Heating Element	PS	Drain pump
ET	Thermostat disactivation	R	Heating element
EV	Electrovalve	RE	Relay
EVA	Dryer electrovalve	RR	Heating element
EVC	Hot water electrovalve	RV	Speed regulator
EVF	Elettrovalvola acqua fredda	Ras/RA	Dryer heating element
EVL	Wash electrovalve	S	LED
EVP	Pre Wash electrovalve	SL	Line LED
FA	Antijamming filter	SO	Door LED
FD	Delicate drying cycle thermostat	SR	Heating LED
FE	Strong drying cycle thermostat	ST	Temperature selector
FRT	Thermofusible Heating Element	SV	Speed Selector for Spin
I	Inverter	T	Timer contacts
I1..2..3..	Switches/switching devices	TA	Drying timer contacts
IA	Switch On/Off	TB	Low Temperature Thermostat
IC	Switch N.C. - 1/2 Load	TC	Spider wheel earth
ID	Switch display	TFL	Flange earth
IE	Water Saving Device	TG	Main earth
IF	Switch - Spin Reduction	TH	Thermostat
IP	Door switch	TH1	1st temperature thermostat
IR	Line switch	TH2	2nd temperature thermostat
IS	Water-stop	TH3	3rd temperature thermostat

L	Line or Lamp	THF	Operating thermostat
LB	Low Level	THR	Adjustable thermostat
LN	Normal Level	TM	Motor earth
LS	Pilot lamp	TMB	Main cabinet earth
M	Earth-symbol	TMP	Motor thermal protector
MC	Spin cycle motor	TMS	Thermostop
MI	MOTOR WITH PULLEY	TP	Thermal protector
ML	Wash cycle motor	TPS	Drain pump earth
MO	Terminal Board	TR	Heating element earth
MP	Door dip-switch	TS	Safety thermostat
MR	Thermal Lock	TT	Timer earthing connection
MT	Timer motor	TTH	Earthing Thermostat
MV	Motor fan	TV	Tank earth
MV -Ras	Dryer heating element	ZBN	Timer

Electric schemes and links

Cod. se104100

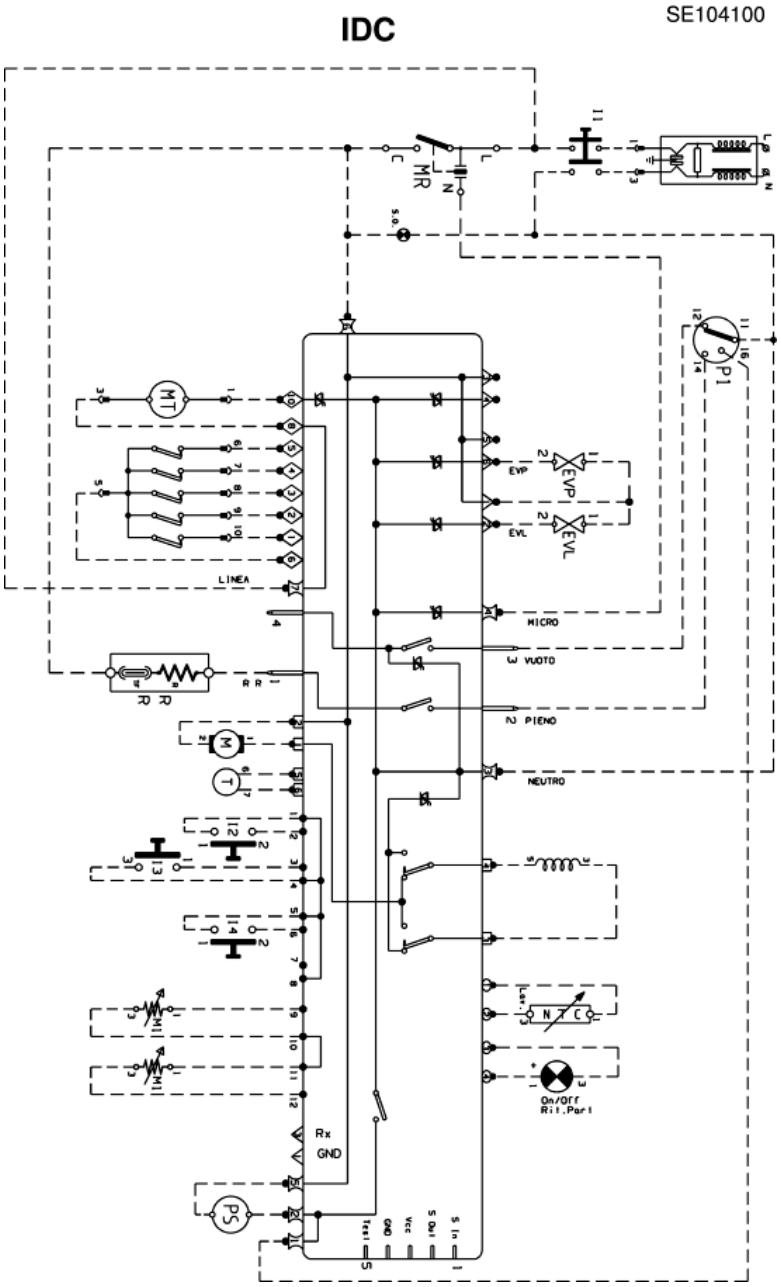

Legend

Legend: se104100

AQS	Aquastop electrovalve	Mzbn/MTA	zbn timer motor
B	Buzzer	N	Neutral or Terminal Board
BC	Blocco Cesto	NC	Spin cycle exclusion
BF	Terminal board contact, motor fan and dryer	P	Pressure switch
BP	Buzzer	P1	1st level pressure cut-off switch
C	Condensator	P2	2nd level pressure cut-off switch
CA	Condensator	PA	High speed potentiometer
DV	Switching device	PB	Low speed potentiometer
EF/CL	Electro-Valve Cold Water / Bleach	PL	Pure Wool
EF/L	Electro-Valve Cold Water / Wash	PM	Motor Thermoprotector
EF/P	Electro-Valve Cold Water / Prewash	PR	Timer programmer or Pressure switch
ER	Exclude Heating Element	PS	Drain pump
ET	Thermostat disactivation	R	Heating element
EV	Electrovalve	RE	Relay
EVA	Dryer electrovalve	RR	Heating element
EVC	Hot water electrovalve	RV	Speed regulator
EVF	Elettrovalvola acqua fredda	Ras/RA	Dryer heating element
EVL	Wash electrovalve	S	LED
EVP	Pre Wash electrovalve	SL	Line LED
FA	Antijamming filter	SO	Door LED
FD	Delicate drying cycle thermostat	SR	Heating LED
FE	Strong drying cycle thermostat	ST	Temperature selector
FRT	Thermofusible Heating Element	SV	Speed Selector for Spin
I	Inverter	T	Timer contacts
I1..2..3..	Switches/switching devices	TA	Drying timer contacts
IA	Switch On/Off	TB	Low Temperature Thermostat
IC	Switch N.C. - 1/2 Load	TC	Spider wheel earth
ID	Switch display	TFL	Flange earth
IE	Water Saving Device	TG	Main earth
IF	Switch - Spin Reduction	TH	Thermostat
IP	Door switch	TH1	1st temperature thermostat
IR	Line switch	TH2	2nd temperature thermostat
IS	Water-stop	TH3	3rd temperature thermostat

L	Line or Lamp	THF	Operating thermostat
LB	Low Level	THR	Adjustable thermostat
LN	Normal Level	TM	Motor earth
LS	Pilot lamp	TMB	Main cabinet earth
M	Earth-symbol	TMP	Motor thermal protector
MC	Spin cycle motor	TMS	Thermostop
MI	MOTOR WITH PULLEY	TP	Thermal protector
ML	Wash cycle motor	TPS	Drain pump earth
MO	Terminal Board	TR	Heating element earth
MP	Door dip-switch	TS	Safety thermostat
MR	Thermal Lock	TT	Timer earthing connection
MT	Timer motor	TTH	Earthing Thermostat
MV	Motor fan	TV	Tank earth
MV -Ras	Dryer heating element	ZBN	Timer