
INDESIT company

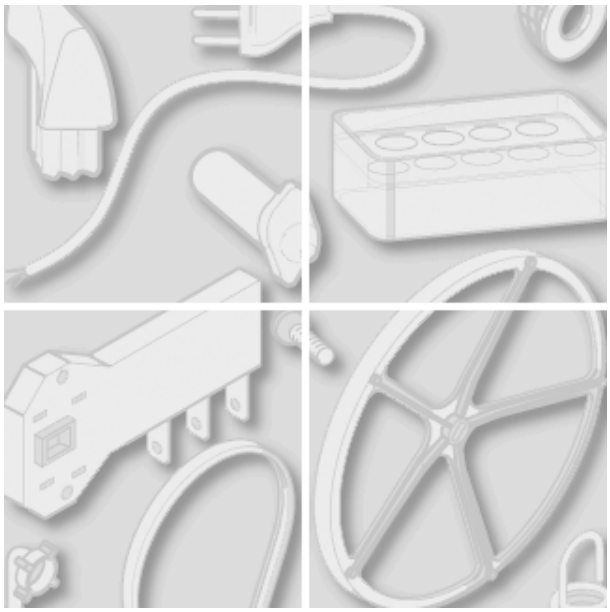

Model type:
LV62IX

Commercial code:
F026565

# General notes

## Technical Documentation guidelines

---

You can find herewith some generic information to simplify cunsulting of technical documentation:

1. Models of same range share the same exploded views, which report the richest set of spare parts:generally, a model does not necessarly have a related spare part for each particular shown on exploded views.

2. Some spare parts can not be represented directly on the exploded views (instruction booklets, specific kit, etc...). You can find those codes in the spare parts list with the same reference of particular where spares are installed or with references 099, 999. Instruction booklets, once managed, appear with 000 reference.

3. On the higher right site of each exploded view there is a serial number which indicates the beginning of the production of certain range:some models might have more than an exploded view for a given category, each distinguished by a different serial no.and linked to another spare parts list, In this case, serial no. is required to supply the right spare part code. Exploded view to be considered is the one with a more recent serial no. but previous than the one of the model that needs assistance.

4.Exploded views might require further updates even after publishing. Addition of new spares will go on following the already existing numeration references. Revision number of an exploded view is shown into last four digits of serial number into upper right hand corner.

5.The spare parts list associated to an exploded view shows related codes of spares managed for a certain model; for each spare part other informations are available:


REF: reference no of spare into a table; SUBSTITUTE: list of spare(s) which can replace a code but that keeps same functional characteristics

INDUSTRIAL CODE: list of variables of a model (shown into model label) where such spare is used; NOTICE: code of information(s) to refer to complete technical intervention, track for changes or to find correct spare part code.

6. Some notices, into a same section are generic therefore cannot be directly linked to a spare part. In order to assist a model in the best way as possible, it is helpful to pay attention to all notices and constantly verify documentation updates

7.Technical documentation cover shows model name and its commercial codes

2190120 Exploded views

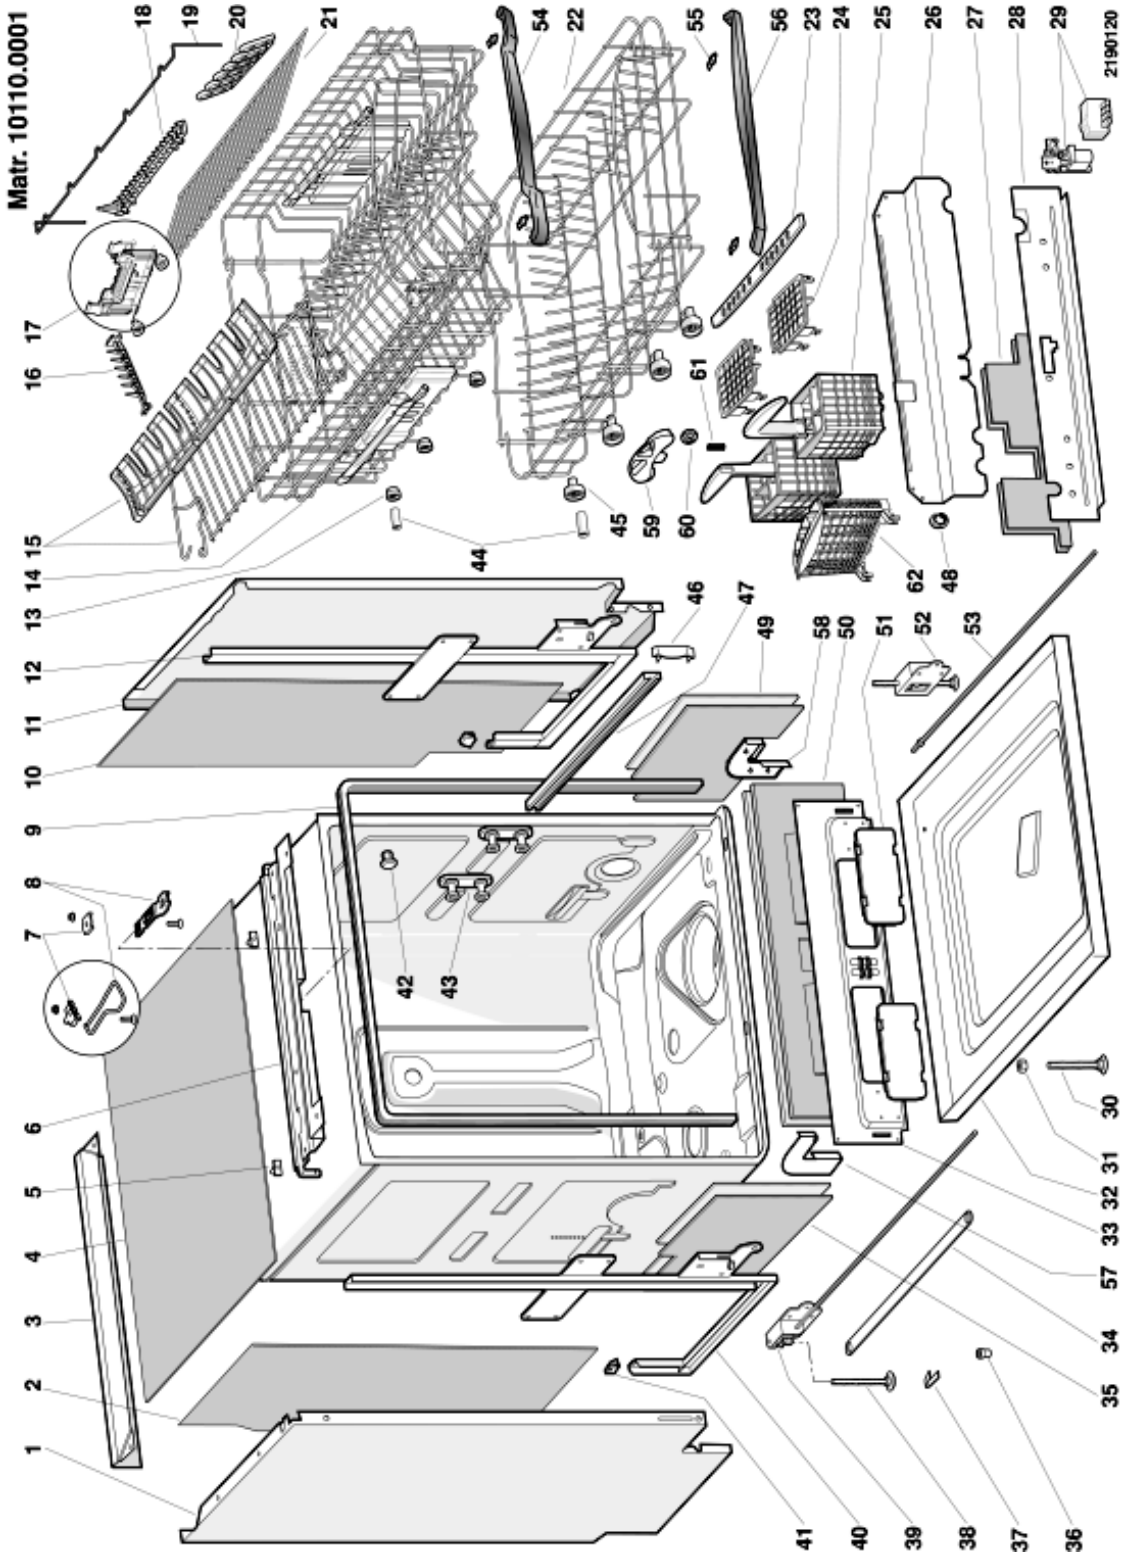


2190120 Spare parts list

| Ref. | Code | From | To S/N | Substitute | Description | Notice | Industrial |
|---|---|---|---|---|---|---|---|
| 000 | C00085022 | | | | instruction book | | |
| 001 | C00092827 | | | 1 x C00092835 | left side panel lh zinc | | |
| 003 | C00033591 | | | | rear support - top | | |
| 003 | C00036547 | | | | anti condensation strip - worktop | | |
| 006 | C00079013 | | | | door spring adjuster | | |
| 008 | C00085024 | | | 1 x C00037135 | catch plate (cabinet) | | |
| | | | | 1 x C00297907 | | | |
| | | | | 1 x C00297909 | | | |
| | | | | 1 x C00297910 | | | |
| 009 | C00141317 | | | | top and side door seal (1638mm) | | |
| 011 | C00092828 | | | 1 x C00092835 | right side panel lh zinc | | |
| 012 | C00085273 | | | | side support - front rh | | |
| 013 | C00040994 | | | | upper basket wheel | | |
| 014 | C00056396 | | | 1 x C00058164 | upper basket 8/12 'ariston incasso' | | |
| 020 | C00056438 | | | | flap upper basket 'ariston' | | |
| 022 | C00056397 | | | 1 x C00054825 | lower basket 'lsv61ix' | | |
| 025 | C00079023 | | | 1 x C00094297 | cutlery basket | | |
| 026 | C00054810 | | | 1 x C00091600 | rear support - middle | | |
| 028 | C00076660 | | | 1 x C00091601 | lower rear support hot or cold | | |
| 029 | C00076659 | | | 1 x C00143383 | radio interference suppressor | | |
| 030 | C00085356 | | | | adjustable foot l=140 | n1045062 | |
| 030 | C00092555 | | | | foot 155mm | | |
| 032 | C00078809 | | | | tray on bottom of tub kit | n1045062 | |
| 032 | C00092554 | | | 1 x C00118842 | tray on bottom of tub 60cm | | |
| 033 | C00091599 | | | 1 x C00119016 | front support lower 60cm | | |
| 034 | C00076656 | | | | slide for foot | | |
| 036 | C00066632 | | | | fixing nut | | |
| 038 | C00078385 | | | 1 x C00092822 | adjustable back foot h=140mm | n1045062 | |
| 038 | C00092822 | | | | adjustable back foot | | |
| 039 | C00078396 | | | 1 x C00092820 | left rear foot adjustment assembly | n1045062 | |
| 039 | C00092820 | | | | left rear foot adjustment assembly | | |
| 040 | C00085274 | | | | side support - front lh | | |
| 041 | C00066629 | | | | post piece | | |
| 043 | C00083570 | | | 1 x C00054836 | runner support - upper | | |
| 044 | C00104638 | | | | basket roller axis | | |

2190120 Spare parts list

| Ref. | Code | From | To S/N | Substitute | Description | Notice | Industrial |
|---|---|---|---|---|---|---|---|
| 045 | C00056347 | | | | lower basket wheel | | |
| 046 | C00040996 | | | | runner stop - upper basket | | |
| 047 | C00077001 | | | | basket runner - upper | | |
| 048 | C00054830 | | | | drain hose fastener | | |
| 051 | C00054833 | | | | top for front support | | |
| 052 | C00078397 | | | 1 x C00092821 | rear foot adjustment assembly | n1045062 | |
| 052 | C00092821 | | | | rear foot adjustment assembly | | |
| 053 | C00082476 | | | | rear foot adjustment assembly | | |

2190230 Exploded views

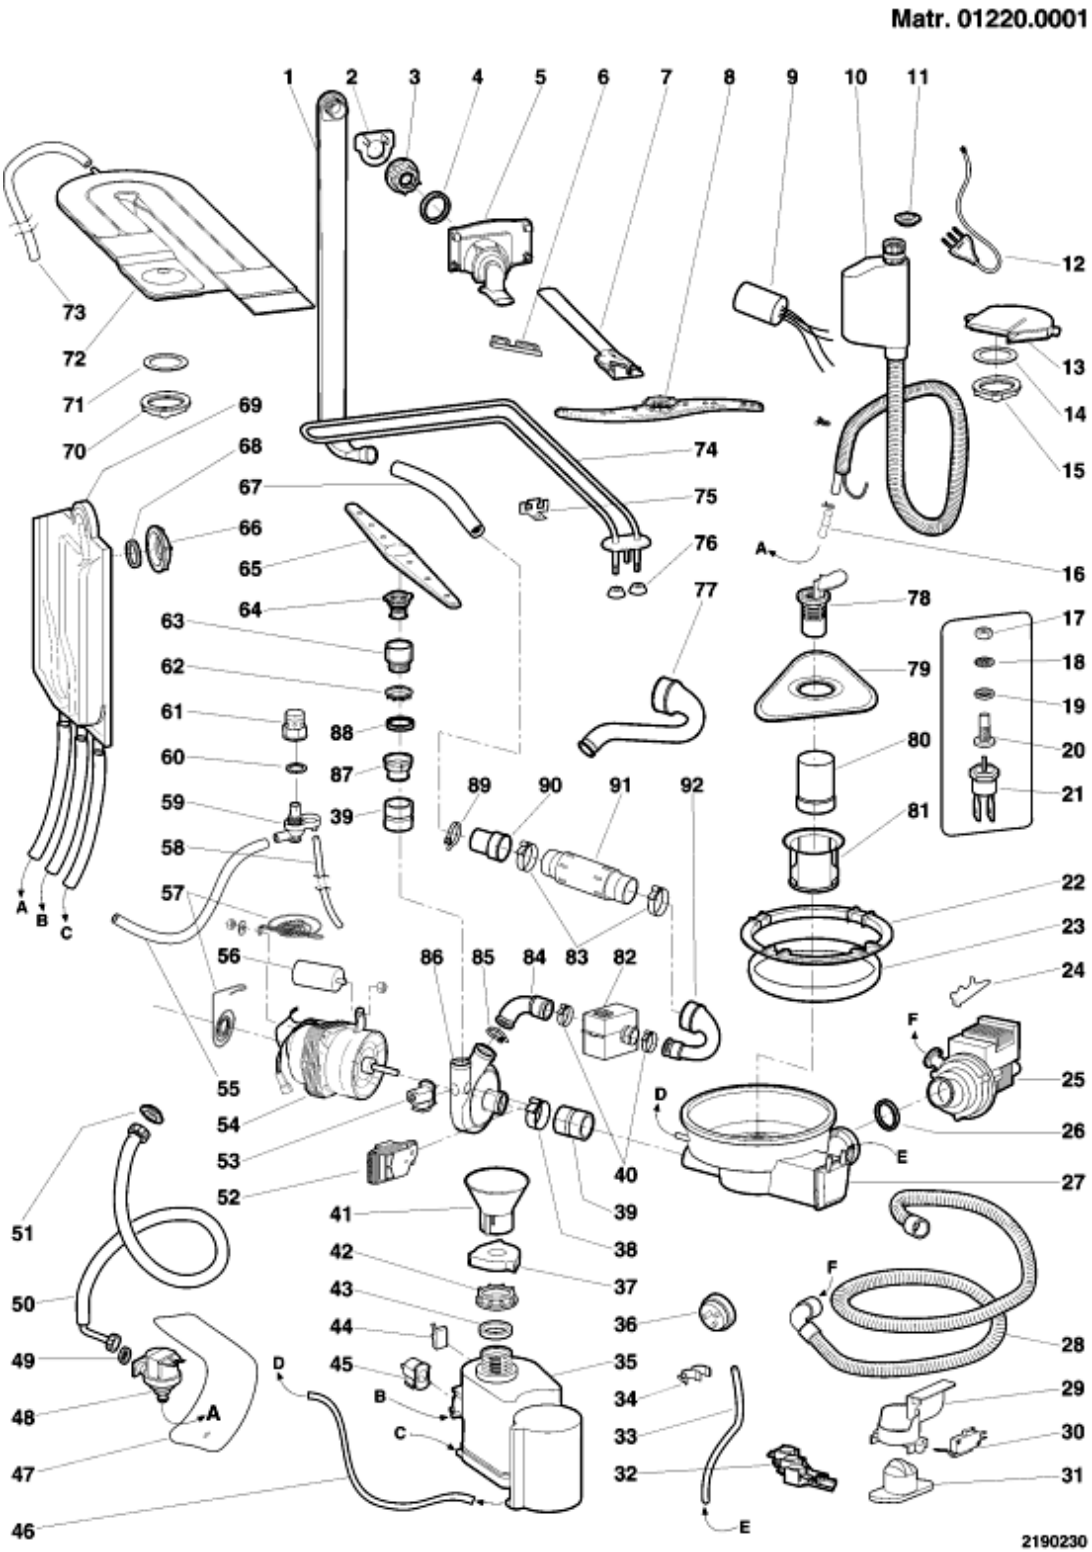

2190230 Spare parts list

| Ref. | Code | From | To S/N | Substitute | Description | Notice | Industrial |
|---|---|---|---|---|---|---|---|
| 001 | C00056001 | | | | upper wash arm feed pipe | | |
| 002 | C00054925 | | | | upper was basket guide casing | | |
| 003 | C00054862 | | | 1 x C00144315 | ring-nut fasten.external hose top | | |
| 004 | C00075686 | | | 1 x C00285074 | jet gasket | | |
| 005 | C00054871 | | | 1 x C00094134 | water supply distribution assembly | n1045084 | |
| 006 | C00056342 | | | | steel pin fixing upper wash arm | n1045084 | |
| 007 | C00054926 | | | 1 x C00110526 | upper wash arm feed pipe | n1045084 | |
| | | | | 1 x C00110527 | | | |
| 008 | C00075746 | | | | upper wash arm curved set | | |
| 008 | C00098769 | | | | upper wash arm seal | | |
| 009 | C00041092 | | | | radio interference suppressor | | |
| 009 | C00076659 | | | 1 x C00143383 | radio interference suppressor | | |
| 012 | C00076658 | | | 1 x C00083706 | supply cable | | |
| 015 | C00054927 | | | 1 x C00144335 | ring-nut for air-flow body | | |
| 017 | C00063788 | | | 1 x C00097871 | lock nut m8 inox | | |
| 018 | C00063790 | | | | washer d.8 mm inox | | |
| 019 | C00063792 | | | | seal o-ring | | |
| 020 | C00063791 | | | | temperature sensor | | |
| 021 | C00041086 | | | | thermostat safety 78ønc (dw) | | |
| 021 | C00063239 | | | 1 x C00041086 | thermostat safety 78ønc | | |
| 022 | C00054854 | | | | sump fixing ferrule | | |
| 023 | C00054828 | | | | gasket - sump fixing ring | | |
| 025 | C00054843 | | | 1 x C00090537 | drain pump v 230 50hz | | |
| 026 | C00054917 | | | | seal 'o'ring (23,81x2,62) | | |
| 027 | C00084421 | | | | set sump | | |
| 028 | C00054869 | | | | drain hose | | |
| 029 | C00081162 | | | | container - overflow unit | | |
| 030 | C00037205 | | | 1 x C00143107 | microswitch | | |
| 031 | C00058843 | | | | float - overflow unit | | |
| 033 | C00066470 | | | | tube 620mm - pressure switch | | |
| 034 | C00076622 | | | | wheelpressure switch hose | | |
| 035 | C00044542 | | | 1 x C00041237 | softener assy + ev | | |
| 036 | C00054841 | | | 1 x C00063834 | pressure switch 1 level | | |
| 037 | C00056435 | | | | salt cap | | |
| 038 | C00073917 | | | | clamp for pump cover | | |


2190230 Spare parts list

| Ref. | Code | From | To S/N | Substitute | Description | Notice | Industrial |
|---|---|---|---|---|---|---|---|
| 039 | C00079016 | | | | pipe rubber sump-pump | | |
| 041 | C00005819 | | | | salt funnel | | |
| 042 | C00041090 | | | 1 x C00144235 | retaining ring - softener | | |
| 043 | C00103610 | | | | seal - softener/wash chamber | | |
| 044 | C00043740 | | | | switch - salt light (tecnoplastica) | | |
| 045 | C00033618 | | | | electrovalve (water softener) | | |
| 046 | C00054868 | | | | tube - softener/sump l.(480mm) | | |
| 048 | C00092578 | | | | electrovalve 1e 1u | | |
| 050 | C00042134 | | | 1 x C00009415 | mains inlet hose h/c-10bar 90ø | | |
| 051 | C00018315 | | | 1 x C00005781 | sealing washer+filter - mains inlet | | |
| 054 | C00076627 | | | | wash motor/pump assy 220v-60w | | |
| 056 | C00105360 | | | | capacitor 5mf | | |
| 057 | C00076628 | | | | tub spring | | |
| 058 | C00079385 | | | | overflow hose | | |
| 059 | C00080518 | | | | container connection overflow | | |
| 060 | C00075695 | | | | connection gasket overflow | | |
| 061 | C00075726 | | | | bodytop overflow | | |
| 062 | C00075057 | | | 1 x C00075111 | cap corner for support washing | | |
| 063 | C00066643 | | | 1 x C00075111 | support - lower wash arm bush | | |
| 064 | C00066642 | | | 1 x C00075111 | ring-nut for fastening bottom | | |
| 065 | C00075108 | | | | lower wash arm inox 60cm | | |
| 067 | C00076233 | | | | pump junction pipe | | |
| 069 | C00054866 | | | | water inlet air break | | |
| 074 | C00046319 | | | 1 x C00066598 | heating element 2000w/230v | | |
| 075 | C00054872 | | | | support bracket - heating element | | |
| 076 | C00074714 | | | | terminal protection - heating | | |
| 078 | C00054863 | | | 1 x C00142344 | central filter | | |
| 079 | C00054851 | | | 1 x C00145075 | outlet filter stainless lvs2000 | | |
| 080 | C00081164 | | | 1 x C00142344 | filter cylindrical | | |
| 081 | C00061929 | | | | outer fine rotating polyester filter | | |
| 085 | C00075879 | | | | clamp | | |
| 085 | C00084479 | | | | hose clamp | | |
| 086 | C00055005 | | | | pump cover | | |
| 087 | C00054850 | | | 1 x C00093752 | ring-nut for fastening bottom | n1045063 | |
| 087 | C00093752 | | | | suction assembly moulded | | |

2190230 Spare parts list

| Ref. | Code | From | To S/N | Substitute | Description | Notice | Industrial |
|---|---|---|---|---|---|---|---|
| 088 | C00054915 | | | | seal 'o'ring (32,99x2,62) | n1045063 | |
| 099 | C00075678 | | | | clamp for electrovalve evo3 | | |
| 099 | C00076515 | | | 1 x C00074713 | heat trasmiter paste | | |

2190370 Exploded views

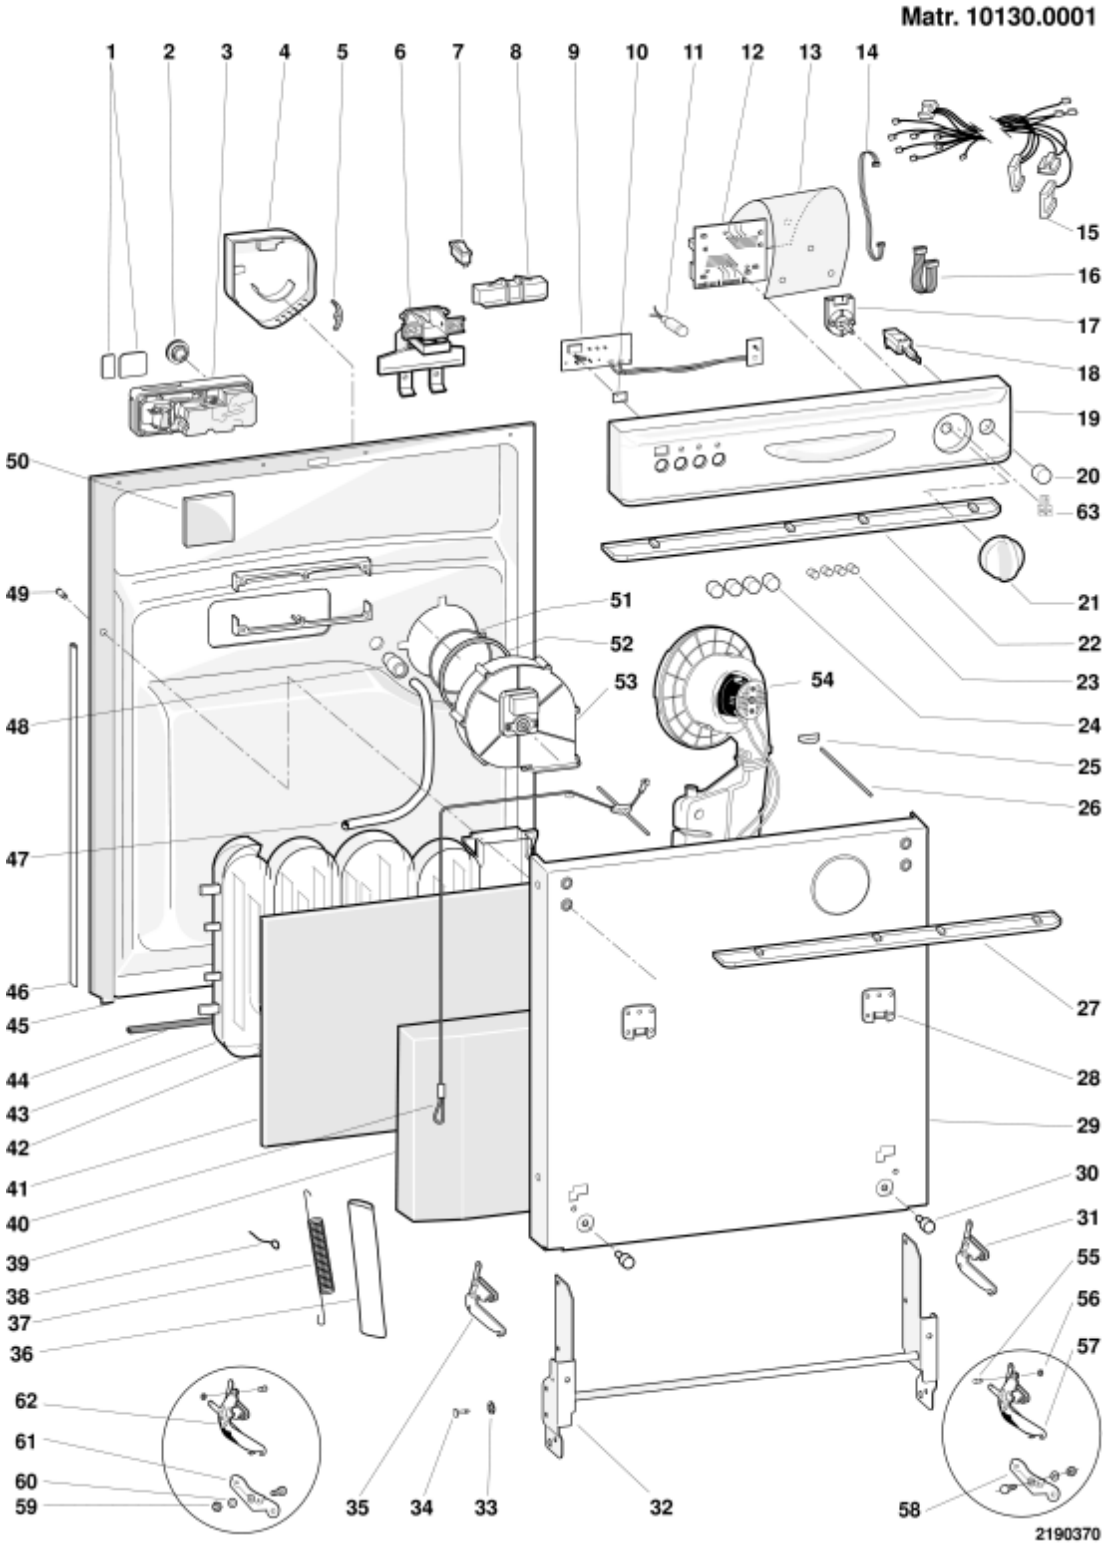

2190370 Spare parts list

| Ref. | Code | From | To S/N | Substitute | Description | Notice | Industrial |
|---|---|---|---|---|---|---|---|
| 002 | C00051754 | | | 1 x C00051755 | plug | | |
| 003 | C00075468 | | | 1 x C00143574 | detergent+rinseaid | | |
| 006 | C00085357 | | | | door lock assembly | n1045086 | |
| 006 | C00094128 | | | 1 x C00195887 | locking assembly evo3 | n1045086 | |
| 007 | C00085358 | | | | microswitch | | |
| 011 | C00085359 | | | | pilot light red 230v | | |
| 012 | C00085028 | | | 1 x C00096972 | timer bit100 'a' + n1045048 | | |
| 015 | C00085360 | | | | wiring harness assembly | | |
| 017 | C00085027 | | | 1 x C00143589 | 8 functions selector x 210ø | | |
| 018 | C00041184 | | | | on-off switch (double pole) (dw) | | |
| 019 | C00085433 | | | 1 x C00115848 | assembled controls inox lv62ix | | |
| 019 | C00091871 | | | | cover compartment handle | | |
| 019 | C00091872 | | | 1 x C00113004 | dashboard blanking plate | | |
| 019 | C00094966 | | | | door spring | | |
| 021 | C00034319 | | | 1 x C00104581 | knob plate | | |
| 021 | C00085435 | | | | knob commutator grey | | |
| 023 | C00087407 | | | | pilot lamp lens | | |
| 024 | C00054435 | | | | chromium push button | | |
| 024 | C00057781 | | | 1 x C00054435 | pushbutton grigio | | |
| 025 | C00054933 | | | | spring adjustment piece | | |
| 026 | C00055000 | | | 1 x C00143736 | special screw for spring | | |
| 027 | C00060102 | | | | height adjusting strip-control | | |
| 029 | C00084619 | | | 1 x C00095269 | door zinc | | |
| 030 | C00076876 | | | | rubber bumper | | |
| 032 | C00085014 | | | | hinge assembly | | |
| 033 | C00058776 | | | | washer d = 6 mm | | |
| 034 | C00048504 | | | | hinge pin | | |
| 036 | C00066426 | | | | tube hinge spring | | |
| 037 | C00086467 | | | | door spring | | |
| 040 | C00054936 | | | | spring adjustment wire | | |
| 044 | C00075690 | | | 1 x C00091543 | cabinet gasket | | |
| 044 | C00088505 | | | 1 x C00091543 | door seal-bottom | n1045056 | |
| 045 | C00085023 | | | 1 x C00094128 | inner door | n1045086 | |
| | | | | 1 x C00112451 | | | |
| 045 | C00112451 | | | 1 x C00269952 | inner door | n1045086 | |

2190370 Spare parts list

| Ref. | Code | From | To S/N | Substitute | Description | Notice | Industrial |
|---|---|---|---|---|---|---|---|
| 046 | C00084616 | | | | edge cover | | |
| 049 | C00076108 | | | 1 x C00012687 | screw canoe klip | | |
| 057 | C00085017 | | | | rh hinge | | |
| 058 | C00085016 | | | | hinge cam+lh upper | | |
| 060 | C00006108 | | | | washer 6,2x16x1,5 | | |
| 061 | C00085015 | | | | hinge cam+lh upper | | |
| 062 | C00085018 | | | | lh hinge | | |
| 063 | C00087976 | | | | cap | n1045053 | |
| 099 | C00040005 | | | 1 x C00033026 | grease amblig ta 1 gr. | | |
| 099 | C00065862 | | | | screw stainless 3,5x8 door liner | | |
| 099 | C00077438 | | | 1 x C00012687 | self-tapping galvanized screw sw | | |
| 099 | C00082166 | | | | rivet | | |
| 099 | C00087240 | | | 1 x C00096977 | installation kit | | |
| 099 | C00096824 | | | | new inox door xdd72 (fim) ## | | |

# Notices

## n1045017: New pressure switches and pipes.

---

Beginning with serial no. 00116.0001, instead of the pressure switch part no. 054841 and the pressure switch pipe part no. 054829, the part no. 063834 already employed on 45 cm appliances and part no. 066470 are used respectively on 60 cm Washing machines manufactured at the None factory.
With the only exception of models LSI61 and LSI61A, fitted with a hide-away electro-mechanical timer, where the pressure switch part no. 056476 must absolutely be fitted (mod. Elbi 120mm).

Should the float come into operation during functioning on pre-modification appliances, then both the pressure switch and the pressure switch pipe should be replaced, using the new parts.
In order to avoid any errors in the use of the part no. 054841, it was eliminated from documentation, whereas a kit is handled with part no. 063834, that is composed of both the pressure switch and the pipe.

## n1045018: New meliorative heating elements.

---

New meliorative heating elements have been created for 60 and 45 cm dishwashers, with the following spare part numbers:
066598, with green surface colour, for 60 cm models.
066602, for 45 cm models.
The new heating elements replace part numbers 046319 and 061014(Rohs 144251).

## n1045034: New top condenser.

---

As of the last week in July 2000, the new "Wind drying system" was inserted on some appliances from the new MarckII Range.
This new system foresees the elimination of the lateral air-flow body and the insertion of a new system with top condenser.
The spare part numbers eliminated are as follows:


054927(Rohs 144335) - RING NUT FOR AIR-FLOW BODY
054928 - AIR-FLOW BODY
103689 - NOZZLE GASKET

057874 - TOP SOUNDPROOFING LAYER

Whereas the new spare part numbers are:

076238 - WIND DRYNG SYSTEM CONDENSER
076239 - CONDENSER RING NUT
076240 - TOP CONDENSER GASKET
076241 - TOP CONDENSER PIPE

The new part numbers are not interchangeable with the old ones, as they are completely different. See technical drawing attached to notice NT002500.

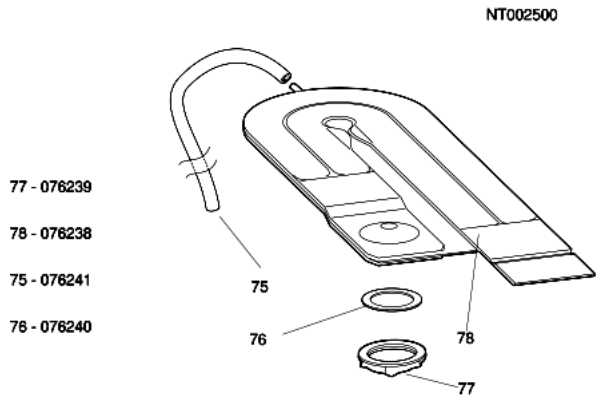


## n1045036: New power supply cables and terminal boards on down-market dishwashers.

---

On the down-market dishwashers, the power supply cable has been modified and the new component parts are not interchangeable with the old ones.
Therefore, in the event of intervention by the Technical Assistance service, the power supply cables, the front and back cross pieces and the old wiring cannot be replaced using the new ones.

## n1045038: Regulating the optic tap.

---

Regulating the optic tap.

In cases where the presence of white stains appear inside the tub with the presence of the "optic tap" on the lime deposit softener, operate in the following mode :

place the salt regulator in the two positions + and - .
Do not use the intermediary position.
NT003700




## n1045053: Final run plug for programmes handle

---

On dishwashers concerned with the current notice to adapt the commutator 8 positions on appliances with 4, 5 or 6 wash cycles, the plug for the final cycle will be employed for the programmes handle Code Sat. 087976.
The mentioned particular will be inserted according to the appliance's cycles assisted on the appropriate slot.
See diagram NT008000.


NT008000

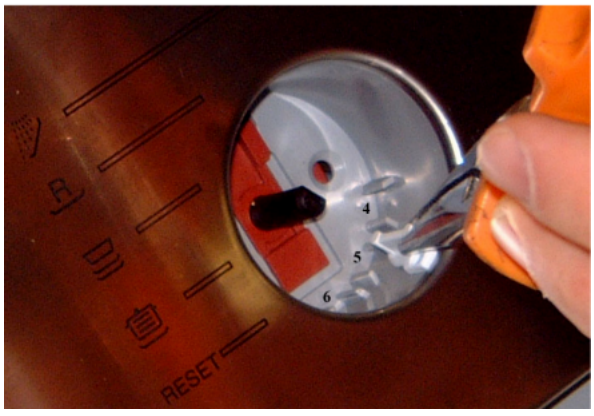


## n1045056: MARK II LOWER TANK SEAL

---

In order to resolve the problem of water leaking from the bottom of the door, all dishwasher models affected by this modification, from serial number 20420.0001 on, have been equipped with lower tank seal, sat code 088505.
See figure "N1045056"

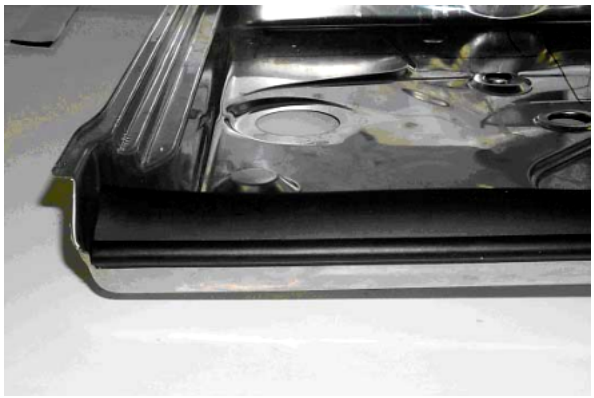

## n1045062: Introduction of a new DW EVO structure

---

From serial number 30101.0001, all dishwasher models affected by this modification have been produced with EVO structure. These models have been equipped with NEW TRAYS AND NEW FEET (see N1045062TAB1).

The structure for SCANDINAVIA models is indicated below:

COMMERCIAL CODE 28490-26043-23520-28088:

PREMODIFICATION:
Tray: 083625 (for commercial code 28490) 078809 (for commercial codes 26043-23520-28088);
Tray rear feet: 078396-078397-078385;
Tray front feet: 073972;
Front feet supports: 065836(Rohs 143584);
Feet supplied with plinth accessories assembly: 034261;

EVO STRUCTURE:
Tray: 092558 (for commercial code 28490) 092554 (for commercial code 26043-23520-28088);
Tray rear feet: 092820-092821-092822;
Tray front feet: 092555;
Front feet supports: 065836;
Feet supplied with plinth accessories assembly: 034261.

COMMERCIAL CODE 25117:


PREMODIFICATION:
Tray: 061991;
Tray feet: 073972;
Feet supplied with plinth accessories assembly: 034261;

EVO STRUCTURE:
Tray: 092554;
Tray feet: 092555;
Feet supplied with plinth accessories assembly: 034261.

Photo N1045062FIG1 illustrates the bottom of the dishwasher with EVO structure.

Regulation assembly DX/SX Sat codes 078397 and 078396 will be managed up to stock end, after that they will be replaced by

new Sat codes 092821 and092820. The same is for rear foot Sat code 078385 which will be replaced by Sat code 092822.

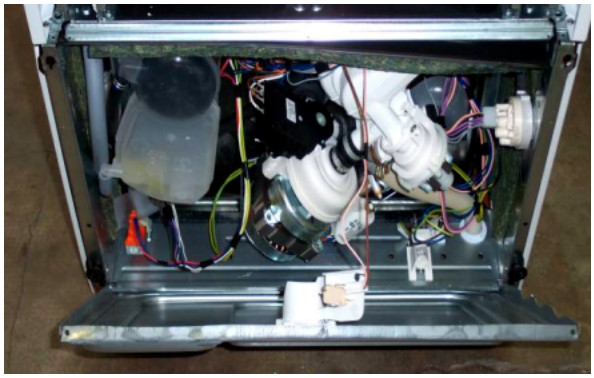


N1045062TAB1 - DEU

| 60 CENTIMETRI | | < M.30101.0001 | > M.30101.0001 |
|---|---|---|---|
| Standgerat | Bodenwanne kit | 061989 | 092554 |
| | Stellfuss vorne | 104611 | |
| | Stellfuss hinten | 065836 | 092555 |
| Einbaugerat ohne Hohenregulierung von vorn | Bodenwanne kit | 061991 | 092554 |
| | 4 stellfuss vorne / hinten | 073972 | 092555 |
| Einbaugerat mit hohenregulierung von vorn | Bodenwanne kit | 078809 | 092554 |
| | Rechte fusseinstellungseinheit | 078397 | 092821 |
| | Linke fusseinstellungseinheit | 078396 | 092820 |
| | Stellfuss hinten | 078385 | 092822 |
| 110/140 mm | Stellfuss vorne | 073972 (110 mm) / 085356 (140 mm) | 092555 |

| 45 CENTIMETRI | | < M.30101.0001 | > M.30101.0001 |
|---|---|---|---|
| Standgerat | Bodenwanne kit | 063809 | 092558 |
| | Stellfuss vorne | 104611 | |
| | Stellfuss hinten | 065836 | 092555 |
| Einbaugerat ohne Hohenregulierung von vorn | Bodenwanne kit | 064463 | 092558 |
| | 4 stellfuss vorne / hinten | 073972 | 092555 |
| Einbaugerat mit hohenregulierung von vorn | Bodenwanne kit | 083625 (110 mm) / 087325 (140 mm) | 092558 |
| | Rechte fusseinstellungseinheit | 078397 | 092821 |
| | Linke fusseinstellungseinheit | 078396 | 092820 |
| | Stellfuss hinten | 078385 | 092822 |
| 110/140 mm | Stellfuss vorne | 073972 (110 mm) / 085356 (140 mm) | 092555 |

| N1045062TAB1 - FRA | | | < M.30101.0001 | > M.30101.0001 |
|---|---|---|---|---|
| LVS 60 CM | Pose Libre | Fond kit | 061989 | 092554 |
| | | Pied avant | 104611 | |
| | | Pied arrière | 065836 | 092555 |
| | Encastrable non régable | Fond kit | 061991 | 092554 |
| | | 4 pied avant / arrière | 073972 | 092555 |
| | Encastrable Régable 110/140 mm | Fond kit | 078809 | 092554 |
| | | Ensemble reglage pied droit | 078397 | 092821 |
| | | Ensemble reglage pied gauche | 078396 | 092820 |
| | | Pied arrière | 078385 | 092822 |
| | | Pied avant | 073972 (110 mm) / 085356 (140 mm) | 092555 |
| | | | < M.30101.0001 | > M.30101.0001 |
| LVS 45 CM | Pose Libre | Fond kit | 063809 | 092558 |
| | | Pied avant | 104611 | |
| | | Pied arrière | 065836 | 092555 |
| | Encastrable non régable | Fond kit | 064463 | 092558 |
| | | 4 pied avant / arrière | 073972 | 092555 |
| | Encastrable Régable 110/140 mm | Fond kit | 083625 (110 mm) / 087325 (140 mm) | 092558 |
| | | Ensemble reglage pied droit | 078397 | 092821 |
| | | Ensemble reglage pied gauche | 078396 | 092820 |
| | | Pied arrière | 078385 | 092822 |
| | | Pied avant | 073972 (110 mm) / 085356 (140 mm) | 092555 |


| N1045062TAB1 - ENG | | | < M.30101.0001 | >M.30101.0001 |
|---|---|---|---|---|
| LVS 60 CM | Free Standing | Tray kit | 061989 | 092554 |
| | | Front foot | 104611 | |
| | | Rear foot | 065836 | 092555 |
| | Not regulable Built in | Tray kit | 061991 | 092554 |
| | | 4 foot front / reat | 073972 | 092555 |
| | Regulable Built in 110/140 mm | Tray kit | 078809 | 092554 |
| | | Rear foot adjustment assembly DX | 078397 | 092821 |
| | | Rear foot adjustment assembly SX | 078396 | 092820 |
| | | Rear foot | 078385 | 092822 |
| | | Front foot | 073972 (110 mm) / 085356 (140 mm) | 092555 |
| | | | < M.30101.0001 | >M.30101.0001 |
| LVS 45 CM | Free Standing | Tray kit | 063809 | 092558 |
| | | Front foot | 104611 | |
| | | Rear foot | 065836 | 092555 |
| | Not regulable Built in | Tray kit | 064463 | 092558 |
| | | 4 foot front / reat | 073972 | 092555 |
| | Regulable Built in 110/140 mm | Tray kit | 083625 (110 mm) / 087325 (140 mm) | 092558 |
| | | Rear foot adjustment assembly DX | 078397 | 092821 |
| | | Rear foot adjustment assembly SX | 078396 | 092820 |
| | | Rear foot | 078385 | 092822 |
| | | Front foot | 073972 (110 mm) / 085356 (140 mm) | 092555 |

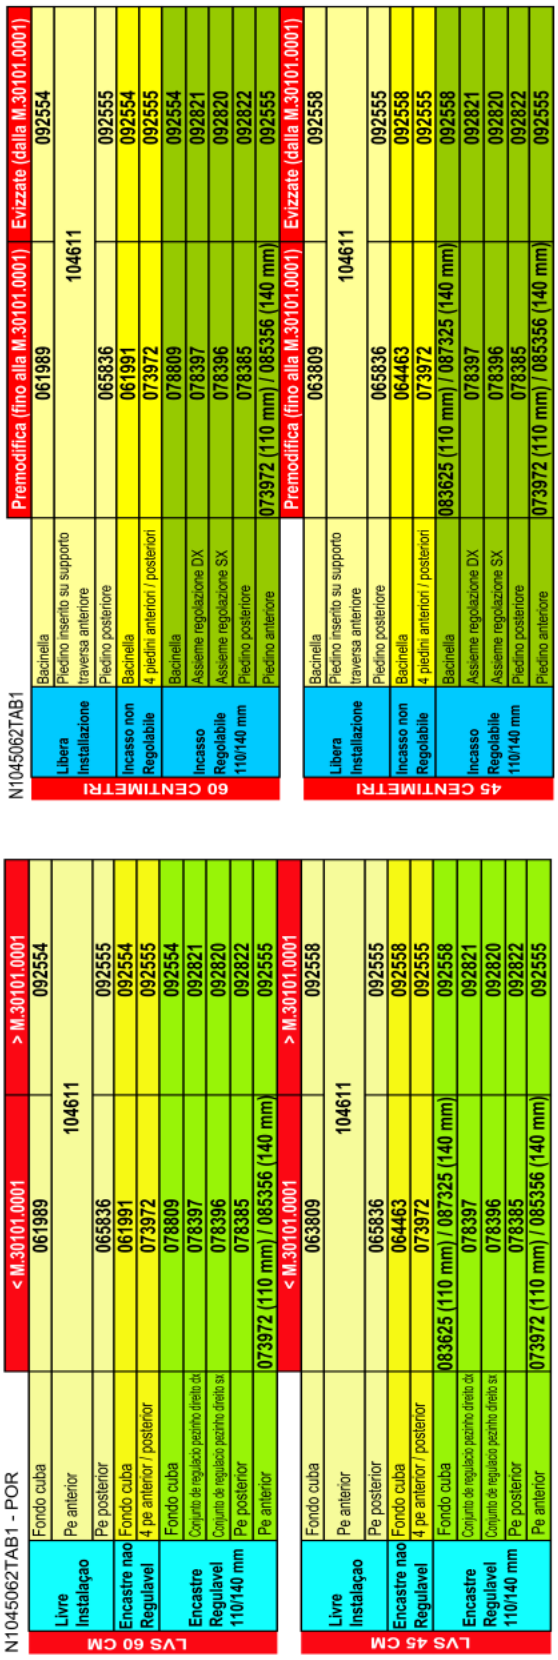


n1045063: Introduction of coupling+ring nut Sat code 093752

---

From serial number 30224.0001, all dishwashers affected by this modification have been equipped with the new coupling+ring nut assembly Sat code 093752, in place of coupling Sat code 079016, ring nut Sat code 054850 and gasket Sat code 054915.

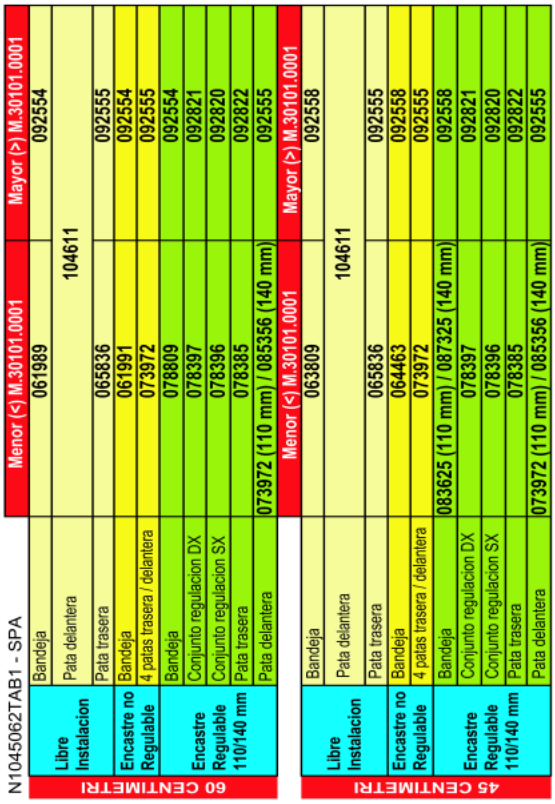


Ring nut Sat code 054850 will continue to be available from the spare parts warehouse while stocks last, and coupling Sat code 079016 will continue to be stocked because it is still used for the tank-volute connection.
Picture N1045063 illustrates the premodification structure in FIG1 and the new structure in FIG2.

N1045063

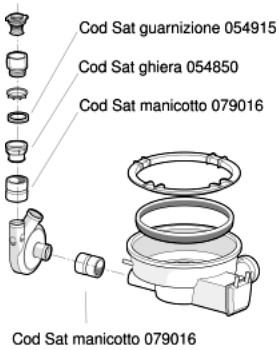



FIG. 1
STRUTTURA
PREMODIFICA





FIG. 2
NUOVA
STRUTTURA

## n1045086: Modification of locking units and inside doors on 60 cm dishwashers


---

From serial no. 40614.0001, all 60 cm dishwashers affected by this note have been equipped with the locking unit code 094128 in place of 085357.
Following the elimination of the two screws Y (see N1045081FIG1) used to fix the locking unit on the inside door, the locking

unit and inside door were also modified, which can be mounted on premodification appliances by replacing the premodification locking unit with the new one.

Codes of modified inside doors:
085023 PREMODIFICATION - 112451 NEW

N1045081FIG1

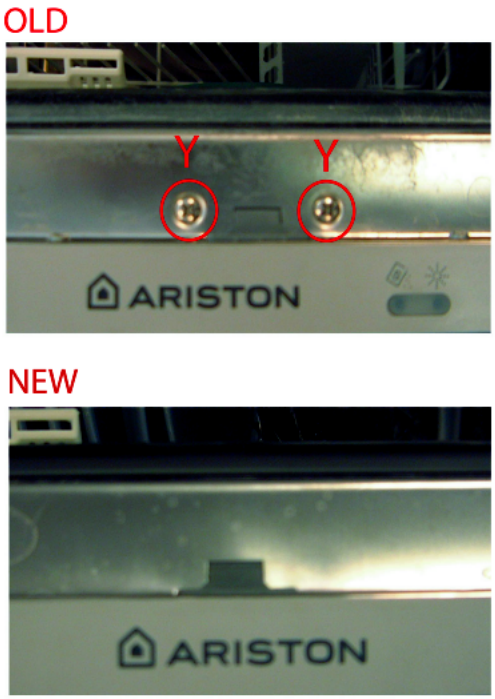

# Electric schemes and links

Cod. lg037400

**BASIC LINEAR DIAGRAM** LG 037400=16001381700

CYCLE LINEAR DIAGRAM

| Washing phases | Intensive | Normal | Fast 45' | Delicate | Cotton drying | Cool | Soak | Pressure switch | Temperature | Alternate | Assigned time | Cycle description |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Prewash | X | X | X | X | X | X | X | V | | Pos.0 | 60" | Drain |
| | X | X | X | | | | | P | | | 20" | Load plus time |
| | X | X | X | | | | | | | Pos.0 | 2' | Dynamic load plus top-up |
| | | X | | | | | | | | Table2 | 28' | Maintain |
| | X | | X | | | | | | | Table2 | 6' | Maintain |
| | X | X | X | | | | | V | | Pos.0 | 60" | Drain |
| | X | X | | | | | | P | | | 20" | Load plus time |
| | X | X | | | | | | P | | Pos.0 | 2' | Dynamic load plus top-up |
| | | X | | | | | | | | Table2 | 6' | Maintain |
| | X | | | | | | | | | | | Heating |
| Wash | X | X | X | | | | | V | | Pos.0 | 60" | Drain |
| | X | X | X | X | X | X | X | P | | | 20" | Load plus time |
| | X | X | X | X | X | X | X | P | | Pos.0 | 2' | Dynamic load plus top-up |
| | X | X | X | X | X | X | X | | | | 60" | Detergent infeed |
| | | | | | | X | X | | | Pos.0 | 60" | Regenera. infeed |
| | | | | | X | X | | | 45°C | Table3 | | Heating |
| | | X | | | | | | | 54°C | Table3 | | Heating |
| | | X | | X | | | | | 57°C | Table3 | | Heating |
| | X | | | | | | | | 65°C | Table3 | | Heating |
| | | | | | | X | | | | Table3 | 1' | Maintain |
| | | | | X | | | | | | Table3 | 4' | Maintain |
| | | | X | | | | | | | Table3 | 10' | Maintain |
| | | X | | | | | | | | Table3 | 16' | Maintain |
| | | X | | | | | | | | Pos.0 | 28' | Maintain |
| | | X | | | | X | | V | | Pos.0 | 60" | Drain |
| | | | | | | X | | P | | Pos.0 | | Load for resin wash |
| | | | | | | X | | V | | Pos.0 | 60" | Drain |
| | | | | | | X | | P | | Pos.0 | | Load for resin wash |
| | | X | | | | | | | | Pos.0 | 15" | Load for collection unit wash |
| | X | | | | | | | | | Pos.0 | 4' | Maintain |
| Rinses | X | X | X | X | X | X | X | V | | Pos.0 | 60" | Drain |
| | | | | X | | | | P | | Pos.0 | | Load plus 3 litres |
| | | | | X | | | | | | Pos.0 | 3' | Pulse phase 15cm15off |
| | | | | X | | | | | | Table2 | 8' | Maintain |
| | X | X | | | | X | X | P | | | 20" | Load plus time |
| | X | X | | | | X | X | P | | Pos.0 | 2' | Dynamic load plus top-up |
| | | | | | | X | X | | | Table2 | 10' | Maintain |
| | X | | | | | | | | | Table2 | 6' | Maintain |
| | X | | | X | X | X | X | V | | Pos.0 | 60" | Drain |
| | X | X | X | X | X | | | P | | | 20" | Load plus time |
| | X | X | X | X | X | | | P | | Pos.0 | 2' | Dynamic load plus top-up |
| | X | X | X | X | X | | | | | | 0.3" | Detergent reset |
| | X | X | X | X | X | | | | | | 60" | Regenerates |
| | X | X | X | X | X | | | | 59°C | Pos.0 | | Heating |
| | X | X | X | X | X | | | | | Table2 | 60" | Rinse aid infeed |
| | X | X | X | X | X | | | | 67°C | Pos.0 | | Heating |
| | X | X | X | X | X | | | | | Pos.0 | 4' | Maintain |
| Drying | X | X | X | X | X | | | | | | 50' | With extra drying |
| | X | X | X | X | X | | | | | | 20' | With normal drying |
| | X | X | X | X | X | | | V | | Pos.0 | 60" | Drain |
| | X | X | X | X | X | | | | | | 15" | Load for resin wash |
| | X | X | X | X | X | | | V | | Pos.0 | 30" | Drain |
| | X | X | X | X | X | | | | | | 60" | Pause |
| | X | X | X | X | X | | | V | | Pos.0 | 30" | Drain |
| | X | X | X | X | X | | | | | | 15" | Load for resin wash |
| | X | X | X | X | X | | | V | | Pos.0 | 30" | Drain |
| | X | X | X | X | X | | | | | | 60" | Pause |
| | X | X | X | X | X | | | V | | Pos.0 | 30" | Drain |
| | X | X | X | X | X | X | X | | | | | Reset |

Alternate table
Pos.o Washes on both collectors
Table2 Washes one minute above and two minutes below
Table3 Washes three minutes below and one minute above

Extra drying function
Pressing the button before the start of the cycle, the 50' extra drying function is activated (20' with water in basket, 20' without water and 10' of turbo drying).
Otherwise normal drying takes place: 20' with water in basket
To activate the extra drying function, press the extra button (a long beep signal will sound). When the extra drying function is deactivated a short beep signal sounds.
Of course, this must be done before the cycle starts.

**LINEAR DIAGRAM FOR MACHINES WITH TURBIDITY SENSOR**

CYCLE LINEAR DIAGRAM

| Turbidity level | 1 | 2 | 3 | 4 | 1 | 2 | 3 | 4 | 1 | 2 | 3 | 4 | Intensive | Normal | Eco Wash | Pressure switch | Temperature | Alternate | Assigned time | Cycle description |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Washing phases | | | | | | | | | | | | | | | | | | | | |
| Prewash | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | V | | Pos.0 | 60" | Drain |
| | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | P | | | 20" | Load plus time |
| | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | P | | Pos.0 | 2' | Dynamic load plus top-up |
| | | | | | | | | | | | | | X | X | X | | | Table2 | 28' | Maintain |
| | X | X | X | | | | | | X | X | X | X | | | | | | Table2 | 6' | Maintain |
| | X | X | X | X | X | X | X | X | | | | | | | | V | | Pos.0 | 60" | Drain |
| | X | X | X | X | X | X | X | X | | | | | | | | P | | | 20" | Load plus time |
| | X | X | X | X | X | X | X | X | | | | | | | | P | | Pos.0 | 2' | Dynamic load plus top-up |
| | | | | X | | | | | | | | | | | | | | Table2 | 2' | Maintain |
| | | | | | 6R | | | | | | | | | | | | | Table2 | 2' | Maintain |
| | | | | | | | X | | | | | | | | | | | Table2 | 8' | Maintain |
| | | | | | | | | | | | | | | | | | | Table2 | 8' | Maintain |
| | | | | | | | | | | | | | | | | | | Table2 | 6' | Maintain |
| | X | | | | | | | | | | | | | | | | 30°C | Table2 | | Heating |
| | | X | | | | | | | | | | | | | | | 41°C | Table2 | | Heating |
| | | | X | | | | | | | | | | | | | | 43°C | Table2 | | Heating |
| | | | | | | | | | | | | | | | | | 45°C | Table2 | | Heating |
| Wash | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | V | | Pos.3 | 60" | Drain |
| | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | P | | | 20" | Load plus time |
| | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | P | | Pos.3 | 2' | Dynamic load plus top-up |
| | X | X | X | X | X | X | X | | | | | | | | | | | | 60" | Detergent infeed |
| | | | | | | | X | | | | | | | | | | 44°C | Pos.3 | | Heating |
| | | | | | | | | X | | | | | | | | | 46°C | Pos.3 | | Heating |
| | | | | | | | | X | | | | | | | | | 48°C | Pos.3 | | Heating |
| | | | | | | | | | | | | X | | | | | 50°C | Pos.3 | | Heating |
| | | | | X | | | | | | | | | | | | | 41°C | Pos.3 | | Heating |
| | | | | | X | | | | | | | | | | | | 43°C | Pos.3 | | Heating |
| | | | | | X | | | | | | | | | | | | 45°C | Pos.3 | | Heating |
| | | | | | | X | | | | | | | | | | | 48°C | Pos.3 | | Heating |
| | | X | | | | | | | | | | | | | | | 51°C | Table3 | | Heating |
| | | | X | | | | | | | | | | | | | | 90°C | Table3 | | Heating |
| | | | X | | | | | | | | | | | | | | 53°C | Table3 | | Heating |
| | | | | X | | | | | | | | | | | | | 65°C | Table3 | | Heating |
| | | | | | | | X | | | | | | | | | | | Table3 | 11' | Maintain |
| | | | | | | | | X | | | | | | | | | | Table3 | 13' | Maintain |
| | | | | | | | | X | | | | | | | | | | Table3 | 14' | Maintain |
| | | | | | | | | | X | | | | | | | | | Table3 | 18' | Maintain |
| | | | | X | | | | | | | | | | | | | | Table3 | 20' | Maintain |
| | | | | | X | | | | | | | | | | | | | Pos.3 | 22' | Maintain |
| | | | | | X | | | | | | | | | | | | | Pos.3 | 25' | Maintain |
| | | | | | | X | | | | | | | | | | | | Pos.3 | 28' | Maintain |
| | | | | X | X | X | | | | | | | | | | V | | Pos.3 | 60" | Drain |
| | | | | X | X | X | | | | | | | | | | P | | Pos.3 | | Load for resin wash |
| | | | | X | X | X | | | | | | | | | | V | | Pos.3 | 60" | Drain |
| | | | | X | X | X | | | | | | | | | | P | | Pos.3 | | Load for resin wash |
| | X | X | X | X | X | X | | | | | | | | | | | | Pos.3 | | Maintain |
| Rinses | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | V | | Pos.3 | 60" | Drain |
| | | | | | | | | | X | X | X | X | | | | P | | Pos.3 | | Load plus 3 litres |
| | X | X | X | X | | | | | X | X | X | X | | | | P | | | 20" | Load plus time |
| | X | X | X | X | | | | | X | X | X | X | | | | P | | Pos.3 | 2' | Dynamic load plus top-up |
| | X | X | | | | | | | | | | | | | | | | Table2 | 4' | Maintain |
| | | X | | | | | | | | | | | | | | | | Table2 | 5' | Maintain |
| | | | | | | | | | X | X | X | X | | | | | | Table2 | 6' | Maintain |
| | X | X | X | X | | | | | X | X | X | X | | | | V | | Pos.3 | 60" | Drain |
| | X | X | X | X | X | X | X | X | X | X | X | X | | | | P | | | 20" | Load plus time |
| | X | X | X | X | X | X | X | X | X | X | X | X | | | | P | | Pos.3 | 2' | Dynamic load plus top-up |
| | X | X | X | X | X | X | X | X | X | X | X | X | | | | | | | 0.3" | Detergent reset |
| | X | X | X | X | X | X | X | X | X | X | X | X | | | | | | | 60" | Regenerates |
| | X | X | X | X | X | X | X | X | X | X | X | X | | | | | 50°C | Pos.3 | | Heating |
| | X | X | X | X | X | X | X | X | X | X | X | X | | | | | | Table2 | 60" | Rinse aid infeed |
| | X | | | X | | | X | | | | X | | | | | | 59°C | Pos.3 | | Heating |
| | | X | | | X | | | X | | | | X | | | | | 61°C | Pos.3 | | Heating |
| | | | X | | | X | | | X | | | X | | | | | 64°C | Pos.3 | | Heating |
| | | | | X | | | X | | | X | | | | | | | 67°C | Pos.3 | | Heating |
| | | | | | X | | | X | | | X | | | | | | | Pos.3 | 4' | Maintain |
| Drying | X | X | X | X | X | X | X | X | X | X | X | X | | | | | | | 50' | With extra drying |
| | X | X | X | X | X | X | X | X | X | X | X | X | | | | | | | 20' | With normal drying |
| | X | X | X | X | X | X | X | X | X | X | X | X | | | | V | | Pos.3 | 60" | Drain |
| | X | X | X | X | X | X | X | X | X | X | X | X | | | | | | | 15" | Load for resin wash |
| | X | X | X | X | X | X | X | X | X | X | X | X | | | | V | | Pos.3 | 30" | Drain |
| | X | X | X | X | X | X | X | X | X | X | X | X | | | | | | | 60" | Pause |
| | X | X | X | X | X | X | X | X | X | X | X | X | | | | V | | Pos.3 | 30" | Drain |
| | X | X | X | X | X | X | X | X | X | X | X | X | | | | | | | | Reset |

Alternate table
Pos.o Washes on both collectors
Table2 Washes one minute above and two minutes below
Table3 Washes three minutes below and one minute above

Extra drying function
Pressing the button before the start of the cycle, the 50' extra drying function is activated (20' with water in basket, 20' without water and 10' of turbo-drying).
Otherwise normal drying takes place: 20' with water in basket
To activate the extra drying function, press the extra button (a long beep signal will sound). When the extra drying function is deactivated a short beep signal sounds.
Of course, this must be done before the cycle starts.

# Legend

Legend: lg037400


| | | | |
|---|---|---|---|
| A.. | Timer contact | LPA | Door open |
| AQS | Aquastop electrovalve | LPR | Prewash LED |
| B.. | Timer contact | LRI | Rinse LED |
| C | Condensor | LS | Mains LED -Pilot lampe On/Off |
| C.. | Timer contact | LSB | Polisher LED |
| CL | Slow cam | LSC | Cycle ranning lamp |
| CM | Wash pump motor connector | LSE | Acquastop LED |
| CN | Connector | LSS | Salt LED |
| CV | Fast cam | LV | Fan off lamp |
| D-ED | Dispenser - Electric dosing device | M | Terminal box |
| D.. | Timer contact | MB | Polisher dip-switch |
| DB | Brightener dispenser | ME | Acquastop dip-switch |
| DD | Display - Detergent dispenser | ML | Wash motor |
| E1 | Cold water electrovalve | MM | Handle dip-switch |
| E2 | Regeneration electrovalve | MP | Door dip-switch |
| E3 | Hot water electrovalve | MR | Delay-timer motor - Terminal board |
| ECO | Saving switch | MT | Timer motor |
| ED | Detergent/Brightener dispenser | MTR | Fast forward timer motor |
| EV1 | Cold water electrovalve MM- Handle dip-switch | MV | Motor fan |
| EV1/2 | Half-load electrovalve | P | Pressure switch |
| EV2 | Regeneration electrovalve | P.. | Pressure switch contact |
| EV3 | Hot water electrovalve | P1 | Stage 1 pressure |
| EVC | Hot water electrovalve | P2 | Stage 2 pressure switch |
| EVF | Cold water electrovalve | PAP | High pressure switch |
| EVR | Regeneration water electrovalve | PO | Overflow pressure switch |
| F | Anti-interference filter ML- Wash motor | PS | Drain pump |
| FA | Radio interferences | PULS | Push-button panel |
| I1 | On/Off switch - Plus cycle switch -IEC cycle | R | Heating element |
| I1/2 | Switch half-load | R.D. | Delay rotary selector |
| I2 | Fast switch -IEC cycle switch (standard) - | RA | Heating element drying |
| I2H | 2-hour delay switch | ROT D | Delay rotary selector |
| I3 | Saving switch- Switch for cycle with no pre- | ROT. | Rotary selector |
| I4 | Switch for cycle fresh dirty | S | Motor overload cutout |

| | | | |
|---|---|---|---|
| I4H | 4-hour delay switch | SC | Selector cycli |
| I5-ICR | Fast cycle switch | SS | Salt detector |
| I6 | Soak cycle switch | ST | START |
| I6H | 6-hour delay switch | T.. | Delay-tymer contact |
| IAQS | Aquastop switch | T1 | Power supply earth cable -Thermostat 45?C |
| ID | Switch display | T2 | Lid earth -Thermostat 55?C |
| IE | Saving switch | T3 | Timer earth -Thermostat 65?C |
| IEXD | Exstra dray switch | T36 | 36?C N.O. Thermostat |
| IG | Main switch | T4 | Heating element earth |
| IMV | Off motor fan switch | T46 | 46?C N.O. Thermostat |
| IP | High temperature switch | T5 | Drain pump earth |
| IS | Cut-off switch | T57 | 57?C N.O. Thermostat |
| ISB | Polisher led switch | T6 | Wash motor earth |
| ISS | Salt LED switch | T8 | External lid earth |
| ITR | Heating element switch | TE | Relay switch |
| L | Mains LED | THP | Thermoprotector |
| L1 | Cycle 1 lamp | TM | Timer |
| L1/2 | Lamp cjcle half-load | TS | Safety thermostat |
| L2 | Cycle 2 lamp | TS 40 | Thermostat 40 ?C |
| L3 | Cycle 3 lamp | TS 50 | Thermostat 50 ?C |
| L4 | Cycle 4 lamp | TS 62 | Thermostat 62 ?C |
| L5 | Cycle 5 lamp | TS1 | Min. temperature thermostat |
| L6 | Cycle 6 lamp | TS2 | Max. temperature thermostat |
| LA | Drying LED | TT | Terminal box support earth |
| LAQ | Aquastop on lamp | Tcp | nner-door earthing connection |
| LC | Cycle ranning lamp | Tfa | Radio interference |
| LD | Delay activated lamp | Tml | Pump wash motor earthing connection |
| LE | Saving cycle | Tpg | Large door earthing connection |
| LH2 | 2-hour delay lamp | Tpi | Inspection door earthing connection |
| LH4 | 4-hour delay lamp | Tpr | Pressure switch |
| LH6 | 6-hour delay lamp | Tps | Discharge pump earthing connection |
| LL | Wash LED | Tr | Heating element |
| LP | High temperature LED | Tte | Delay-timer earthing connection |

Electric schemes and links

Cod. se091600

SE091600

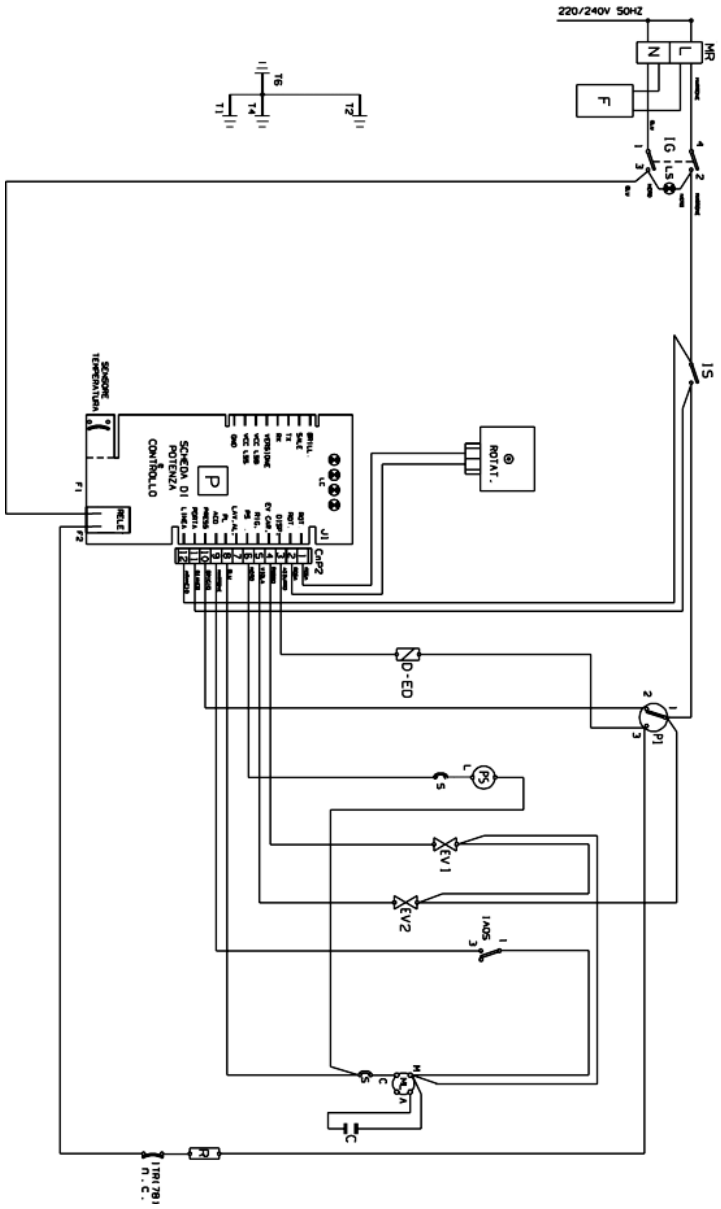

# Legend

Legend: se091600

| | | | |
|---|---|---|---|
| A.. | Timer contact | LPA | Door open |
| AQS | Aquastop electrovalve | LPR | Prewash LED |
| B.. | Timer contact | LRI | Rinse LED |
| C | Condensor | LS | Mains LED -Pilot lampe On/Off |
| C.. | Timer contact | LSB | Polisher LED |
| CL | Slow cam | LSC | Cycle ranning lamp |
| CM | Wash pump motor connector | LSE | Acquastop LED |
| CN | Connector | LSS | Salt LED |
| CV | Fast cam | LV | Fan off lamp |
| D-ED | Dispenser - Electric dosing device | M | Terminal box |
| D.. | Timer contact | MB | Polisher dip-switch |
| DB | Brightener dispenser | ME | Acquastop dip-switch |
| DD | Display - Detergent dispenser | ML | Wash motor |
| E1 | Cold water electrovalve | MM | Handle dip-switch |
| E2 | Regeneration electrovalve | MP | Door dip-switch |
| E3 | Hot water electrovalve | MR | Delay-timer motor - Terminal board |
| ECO | Saving switch | MT | Timer motor |
| ED | Detergent/Brightener dispenser | MTR | Fast forward timer motor |
| EV1 | Cold water electrovalve MM- Handle dip-switch | MV | Motor fan |
| EV1/2 | Half-load electrovalve | P | Pressure switch |
| EV2 | Regeneration electrovalve | P.. | Pressure switch contact |
| EV3 | Hot water electrovalve | P1 | Stage 1 pressure |
| EVC | Hot water electrovalve | P2 | Stage 2 pressure switch |
| EVF | Cold water electrovalve | PAP | High pressure switch |
| EVR | Regeneration water electrovalve | PO | Overflow pressure switch |
| F | Anti-interference filter ML- Wash motor | PS | Drain pump |
| FA | Radio interferences | PULS | Push-button panel |
| I1 | On/Off switch - Plus cycle switch -IEC cycle | R | Heating element |
| I1/2 | Switch half-load | R.D. | Delay rotary selector |
| I2 | Fast switch -IEC cycle switch (standard) - | RA | Heating element drying |
| I2H | 2-hour delay switch | ROT D | Delay rotary selector |
| I3 | Saving switch- Switch for cycle with no pre- | ROT. | Rotary selector |
| I4 | Switch for cycle fresh dirty | S | Motor overload cutout |

| | | | |
|---|---|---|---|
| I4H | 4-hour delay switch | SC | Selector cycli |
| I5-ICR | Fast cycle switch | SS | Salt detector |
| I6 | Soak cycle switch | ST | START |
| I6H | 6-hour delay switch | T.. | Delay-tymer contact |
| IAQS | Aquastop switch | T1 | Power supply earth cable -Thermostat 45?C |
| ID | Switch display | T2 | Lid earth -Thermostat 55?C |
| IE | Saving switch | T3 | Timer earth -Thermostat 65?C |
| IEXD | Exstra dray switch | T36 | 36?C N.O. Thermostat |
| IG | Main switch | T4 | Heating element earth |
| IMV | Off motor fan switch | T46 | 46?C N.O. Thermostat |
| IP | High temperature switch | T5 | Drain pump earth |
| IS | Cut-off switch | T57 | 57?C N.O. Thermostat |
| ISB | Polisher led switch | T6 | Wash motor earth |
| ISS | Salt LED switch | T8 | External lid earth |
| ITR | Heating element switch | TE | Relay switch |
| L | Mains LED | THP | Thermoprotector |
| L1 | Cycle 1 lamp | TM | Timer |
| L1/2 | Lamp cjcle half-load | TS | Safety thermostat |
| L2 | Cycle 2 lamp | TS 40 | Thermostat 40 ?C |
| L3 | Cycle 3 lamp | TS 50 | Thermostat 50 ?C |
| L4 | Cycle 4 lamp | TS 62 | Thermostat 62 ?C |
| L5 | Cycle 5 lamp | TS1 | Min. temperature thermostat |
| L6 | Cycle 6 lamp | TS2 | Max. temperature thermostat |
| LA | Drying LED | TT | Terminal box support earth |
| LAQ | Aquastop on lamp | Tcp | nner-door earthing connection |
| LC | Cycle ranning lamp | Tfa | Radio interference |
| LD | Delay activated lamp | Tml | Pump wash motor earthing connection |
| LE | Saving cycle | Tpg | Large door earthing connection |
| LH2 | 2-hour delay lamp | Tpi | Inspection door earthing connection |
| LH4 | 4-hour delay lamp | Tpr | Pressure switch |
| LH6 | 6-hour delay lamp | Tps | Discharge pump earthing connection |
| LL | Wash LED | Tr | Heating element |
| LP | High temperature LED | Tte | Delay-timer earthing connection |