
INDESIT company

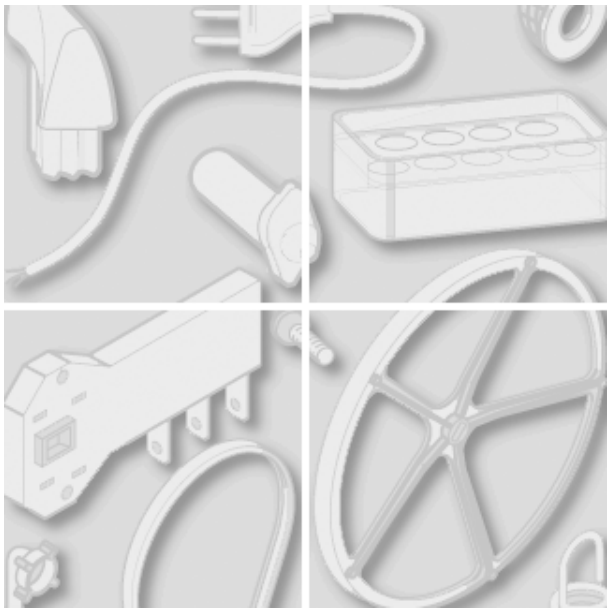

Model type:
TZA1

Commercial code:
F034583

General notes

Technical Documentation guidelines

You can find herewith some generic information to simplify cunsulting of technical documentation:

1. Models of same range share the same exploded views, which report the richest set of spare parts:generally, a model does not necessarly have a related spare part for each particular shown on exploded views.

2. Some spare parts can not be represented directly on the exploded views (instruction booklets, specific kit, etc...). You can find those codes in the spare parts list with the same reference of particular where spares are installed or with references 099, 999. Instruction booklets, once managed, appear with 000 reference.

3. On the higher right site of each exploded view there is a serial number which indicates the beginning of the production of certain range:some models might have more than an exploded view for a given category, each distinguished by a different serial no.and linked to another spare parts list, In this case, serial no. is required to supply the right spare part code. Exploded view to be considered is the one with a more recent serial no. but previous than the one of the model that needs assistance.

4.Exploded views might require further updates even after publishing. Addition of new spares will go on following the already existing numeration references. Revision number of an exploded view is shown into last four digits of serial number into upper right hand corner.

5.The spare parts list associated to an exploded view shows related codes of spares managed for a certain model; for each spare part other informations are available:

REF: reference no of spare into a table; SUBSTITUTE: list of spare(s) which can replace a code but that keeps same functional characteristics


INDUSTRIAL CODE: list of variables of a model (shown into model label) where such spare is used; NOTICE: code of information(s) to refer to complete technical intervention, track for changes or to find correct spare part code.

6. Some notices, into a same section are generic therefore cannot be directly linked to a spare part. In order to assist a model in the best way as possible, it is helpful to pay attention to all notices and constantly verify documentation updates

7.Technical documentation cover shows model name and its commercial codes

5181040 Exploded views

Matr.30801.0001

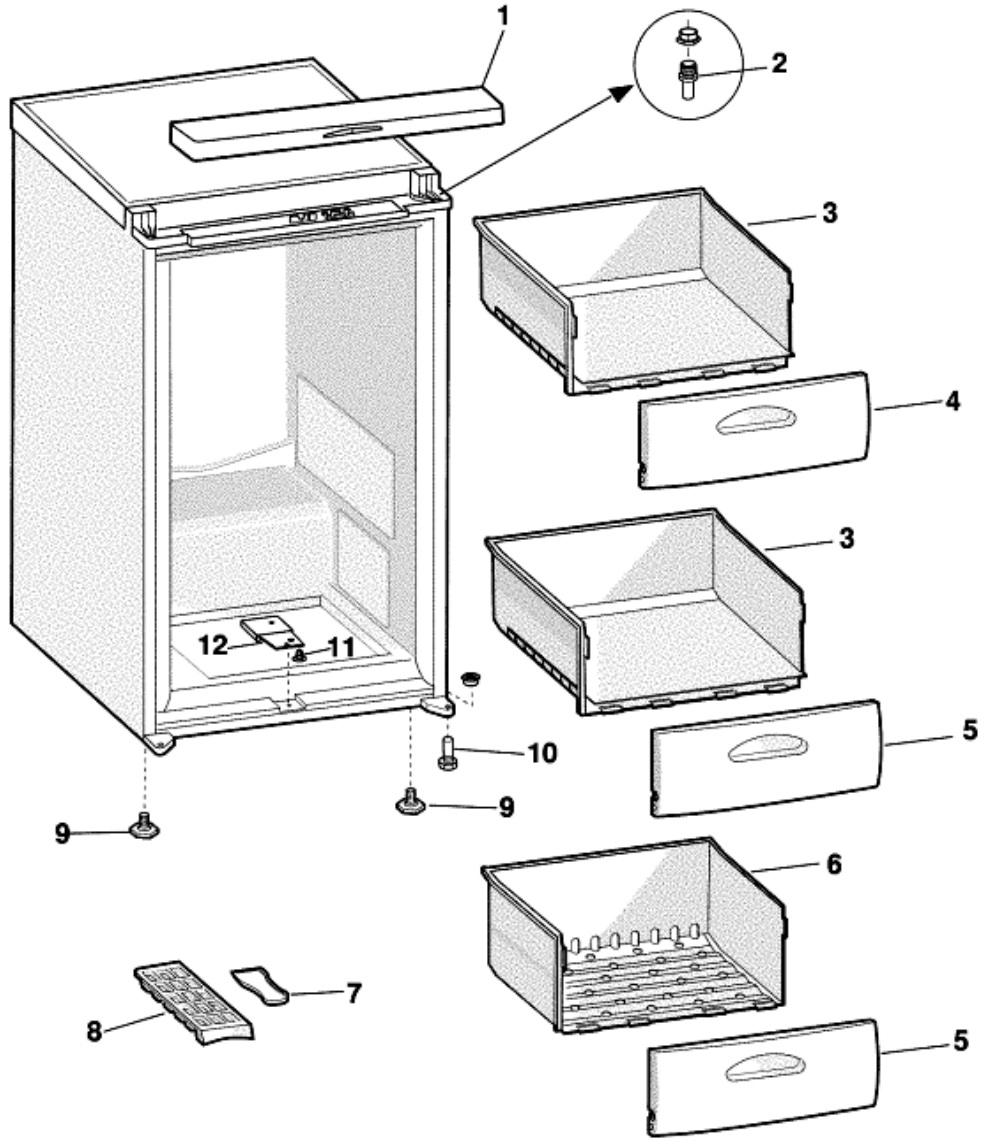


5181040

5181040 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
000	C00118151				user instruction booklet tza1		
001	C00118154				head panel tt55fz pw		
002	C00096777				hinge pin - top m8		
003	C00096768				freezer drawer 414x366mm -		
004	C00096762			1 x C00279833	freezer flap 414 x 205 x 25mm		
005	C00049465			1 x C00096762	freezer flap lower w414x205x25		
006	C00096771				freezer drawer 414x201mm -		
007	C00003261				ice scraper - white		
008	C00103332			1 x C00019414	ice cube tray 230x114x36		
009	C00053419		70820...		adjustable foot		
009	C00258868	70821...			foot adjustable no pin. tt55		
010	C00032099		70820...		hinge pin - top/lower m8x26 zncr		
010	C00258866	70821...			hinge / foot pin - lower tt55-rh-		
010	C00258867	70821...			hinge / foot pin - lower tt55-lh-		
011	C00075194				clip fastex (54-1949-1100)		
012	C00075193				freezer drain-gasket white		
099	C00098204				sponge white (480x5x4)		

5181150 Exploded views

Matr. 30801.0001

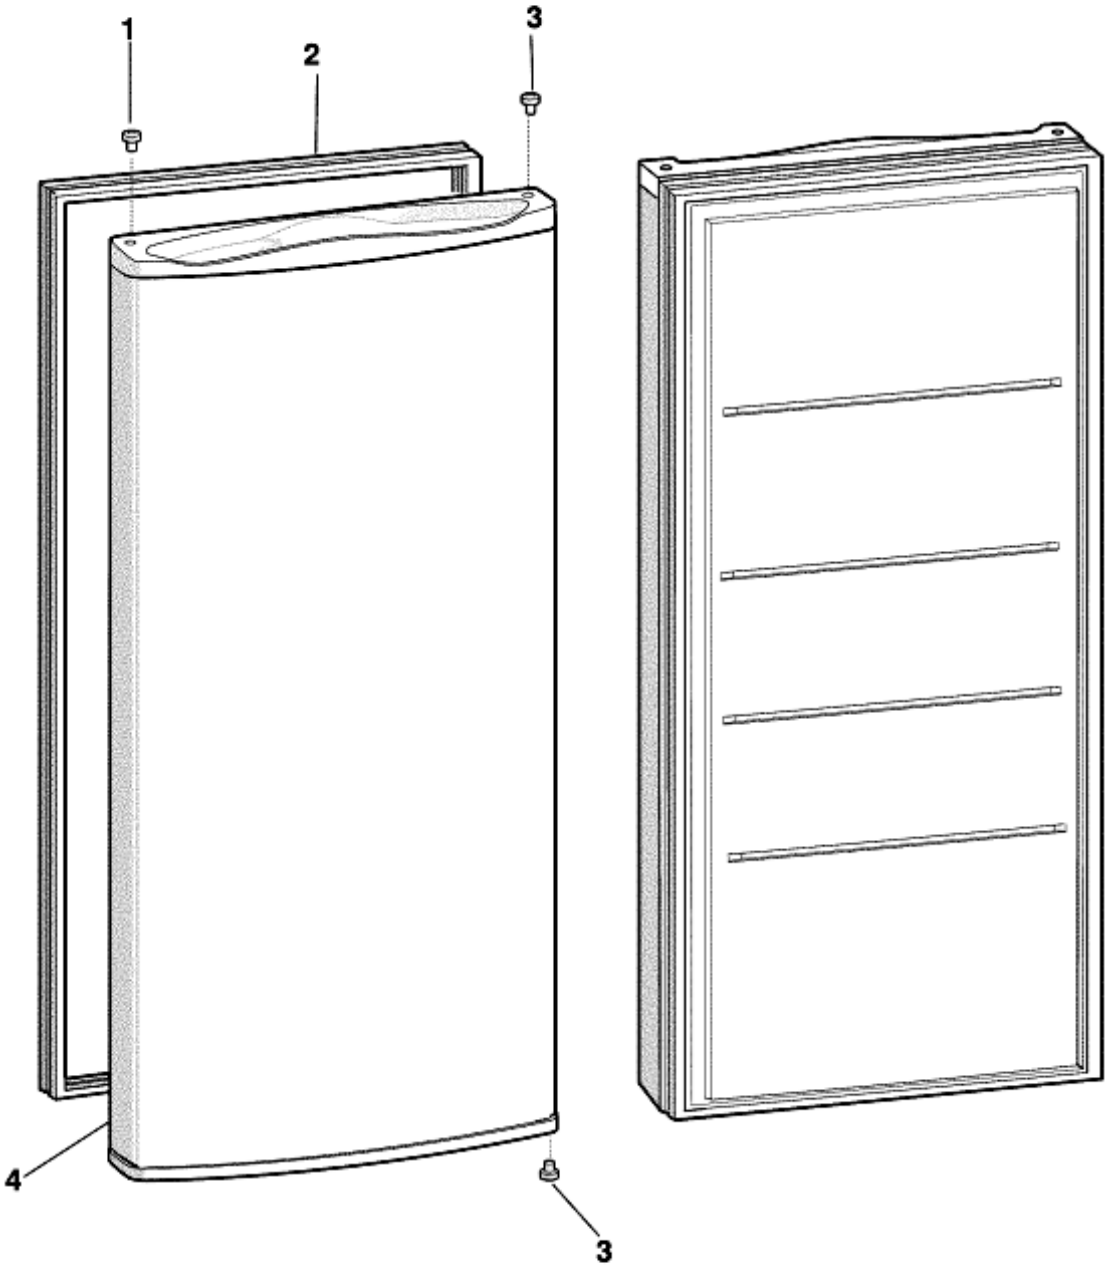


5181150

5181150 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
001	C00045903			1 x C00114784	blanking plug (h.14 d.13,8/9,5) -		
002	C00118005				door gasket tt55 polar white	0521123	
002	C00144943				door seal (fridge) 530x757 p900-		
003	C00022161				hinge bush 4x15 mm - white		
003	C00022760				hinge bush (9,5 mm) - white		
003	C00024267				hinge bush (7x21.5mm) - white		
004	C00118148		80321...		freezer door assy tt55 pw		
004	C00265356	80322...			freezer door assy tt55 pw		

5181240 Exploded views

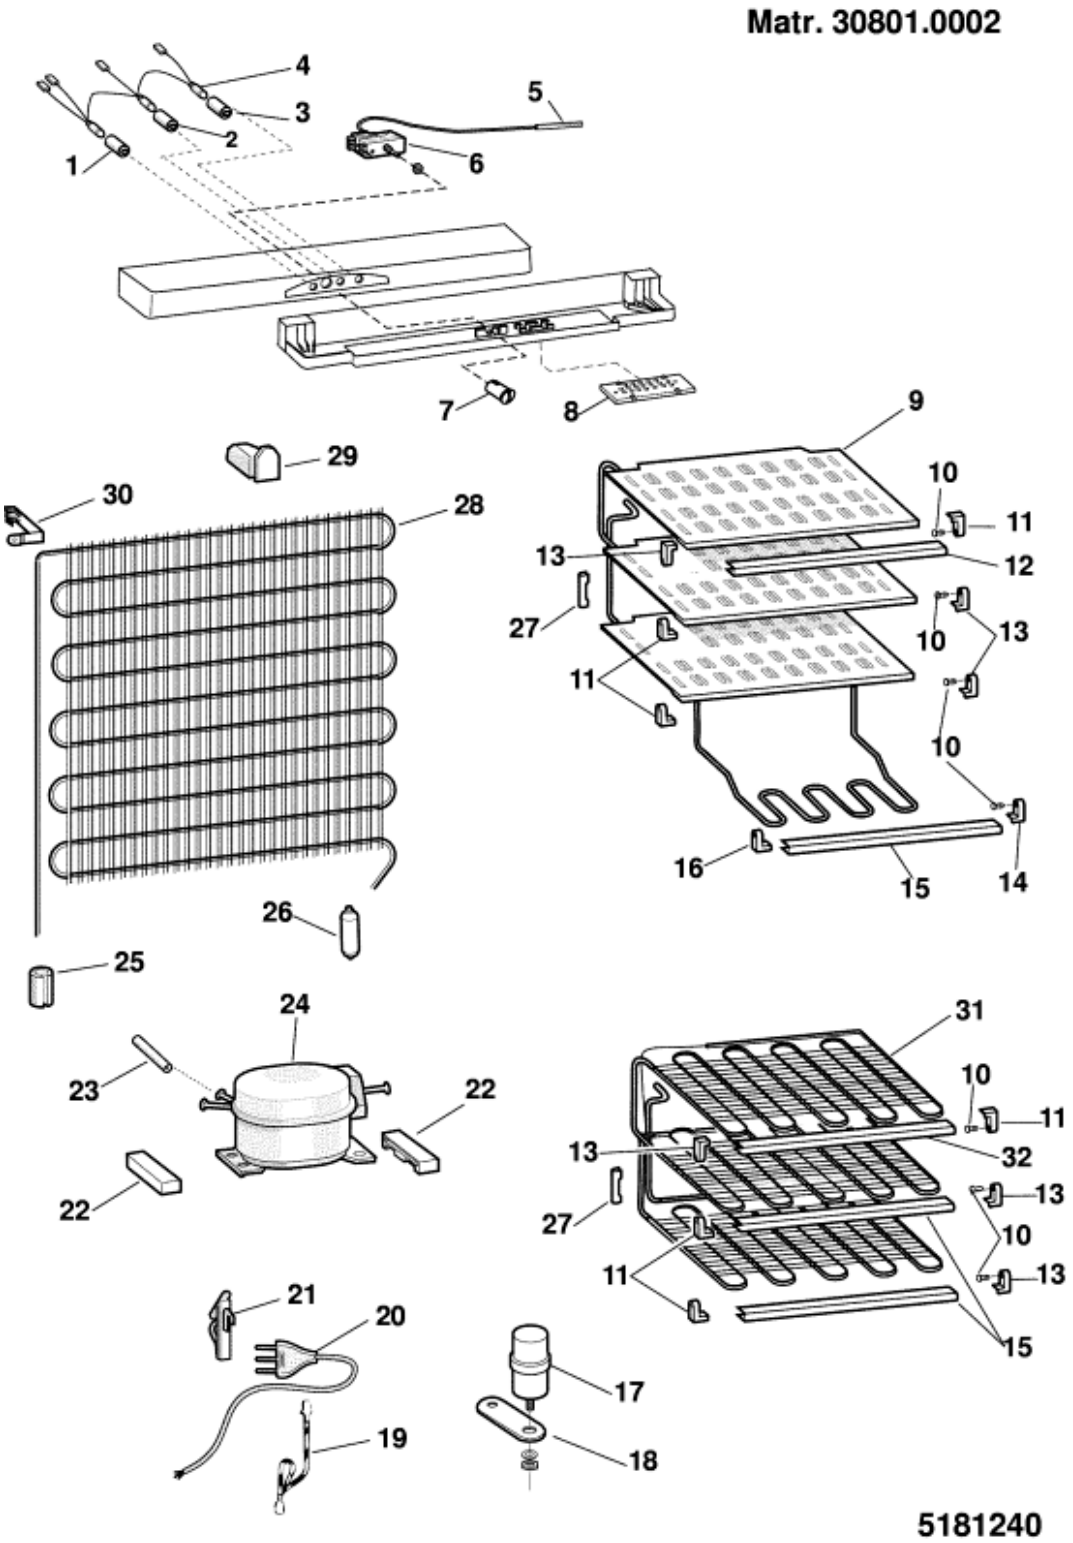

5181240 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
001	C00064304				green pilot lamp (lisa)		
002	C00064305				yellow red pilot (lisa)		
003	C00064306				red pilot lamp cover (lisa)		
004	C00096783			1 x C00279832	set indicator light-		
005	C00117324				white th bulb protec.covering rza		
006	C00096784				thermostat k56-l1938 centre post		
007	C00117192				knob - thermostat ind. tt55 pw		
008	C00098903				lamp cover white		
009	C00277560				freezer evaporator		
010	C00014612				plastic expansion rivet		
011	C00043837				rh evaporator plate support - white		
013	C00043838				lh evaporator plate support - white		
014	C00065325				evaporator plate support rh - white		
015	C00075195		20108...		trim (406x19x16.5mm) white	n3512c01	
015	C00281560	20109...			trim 426mm white	n3512c01	
016	C00065324				evaporator plate support lh - white		
017	C00089675				capacitor danfoss 4mf		81345830000
							81345830001
							81345830002
							81345830100
017	C00266589			1 x C00291503	capacitor ducati 4 mf (m8) p2-uk		81345830101
017	C00266607				capacitor ducati 3 mf p2-uk		81345830104
018	C00046312				capacitor fixing plate (750908)		
019	C00042302				earth lead		
020	C00117131				supply cable rla eu		
021	C00094418				stop mains supply cable		
022	C00057840				rubber shock absorber		
023	C00008727				charging pipe without valve		
023	C00043021				service pipe with valve (6 nfmssv)		
023	C00173135		91022...		charging pipe (6x90x1)		
023	C00277029	91023...			charging pipe 6x0.71x115mm		
024	C00049408			1 x C00144754	compres. tles5k/tles5kk2 220-		81345830001
024	C00111103			1 x C00216436	compr.hsh 080 aa		81345830002
							81345830102
024	C00111118			1 x C00111120	compressor thb1335mks 220-		81345830000

5181240 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
024	C00111119			1 x C00144770	set thb1335mks ter.board 220-		81345830000
							81345830100
024	C00143340				set zem hsh80 terminal board		81345830002
							81345830102
024	C00144754				compre.tles5kk2 220-240/50 1/10-		81345830101
024	C00174632			1 x C00058961	relay - thermal protector assy.		81345830001
024	C00254353				terminal board hvy57aa		81345830103
024	C00260001			1 x C00277059	compr.hvy67aa 220-240/50 1/7		81345830103
024	C00277060			1 x C00277059	compr.hvy67aa 220/50 1/7 hp-		81345830105
024	C00283417				kit compr.htk70aa3 1/7hp-117w		81345830104
025	C00037341				anti vibration rubber bush		
026	C00045265			1 x C00266179	filter gr.12 (d.1,95/d.4 mm) gas		
027	C00028787				phial clamp		
028	C00099550	61203...	00117...		condenser imat (bxh) 538x400		
028	C00117319		61202...		condenser rza		
028	C00278175	00118...			condenser imat (bxh) 538x400		
028	C00282375				pipes fixing square		
028	C00288921				condenser imat (bxh) 508x496		81345830105
029	C00104700				condenser spacer		
030	C00057735				support (23x23,5 mm) -		
031	C00117577				freezer evaporator rza tt55		
032	C00115079				trim 400x18x7,7 mm white-pw		


Notices

0521123: SEALS FOR DOORS FOAMED AS ONE PIECE

Various types of gaskets with different profile, as shown in figures (A) and (B), are used to fix the door (fig. A-5; B-5) and the inner door (fig. A-6; B-6) on the block foamed doors of combined freezers and refrigerators.
---Ilpea profile 245; 179; 412 (fig.A)
---Ilpea profile 287 (fig.B)
When replacing gaskets with profiles 245; 179; 412 these are fixed with screws (2 per corner) to the door.
Gaskets with profile 287 can not be used as spare parts but are designed to house the Ilpea type 900 gaskets (see figure C).
When replacing the gasket (287), once it is removed you will find a pocket (fig. B-1) between the door and inner door.
The rigid tooth (fig.C-1) of the gasket (900) is inserted inside between the pocket and the inner door, doing away with the need for screws.
Gasket with profile 287 is easy to identify since it has an exterior double edge (fig.B-2) which acts as a cushion when the door is closed.
To replace this gasket, follow these steps:
---Dismount the door and cut the four corners of the gasket along the joint (fig.D);
---lift the gasket and pull it carefully along its full length without tearing it (fig.E).
The purpose here is to detach the inner door slightly from the foam along the exterior edge for a depth equal to that of the gasket (fig.B-3);
---lift the corner of the inner door slightly, prising it up with your thumb (fig.F). Do not use a tool which might break the inner door;
---continue cutting the gasket inside the inner door for about 6 mm (fig.G);
---push in the tip of the pliers (type USAG N131) and pull outwards until you see the top edge of the pocket (fig. B-4) which is empty (fig.H-1);
---if you carry out this operation correctly (fig.L) you will be able to pull off the top edge of the pocket for the full length of the door.
If the gasket tears before the top edge (fig. L-2) you should repeat this operation from the other corner of the door.
---once the gasket (287), has been removed the space above the pocket (fig. L-1) can house the rigid tooth (fig. C-1) of the gasket 900.
When you fit this gasket ensure that it lies flush against the edge for the full length of the door.
If the rigid tooth is difficult to fit, eliminate any residues of foam between the door and the inner door in the gasket area.
fig.5131549A

n3512c01: EVAPORATOR SUPPORT PROFILE CHANGE

EVAPORATOR SUPPORT PROFILE CHANGE

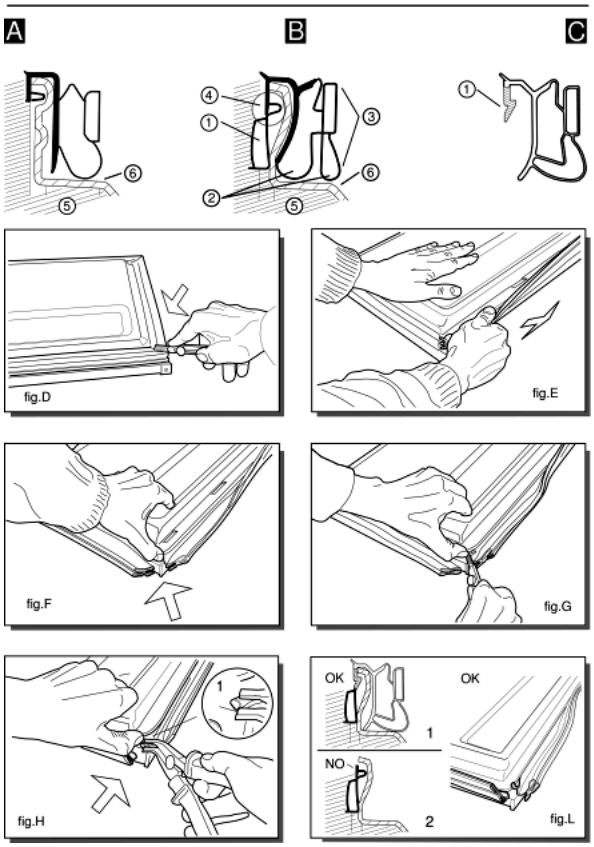
A
B
C
fig.D
fig.E
fig.F
fig.G
fig.H
OK
OK
1
NO
2
fig.L