
INDESIT company

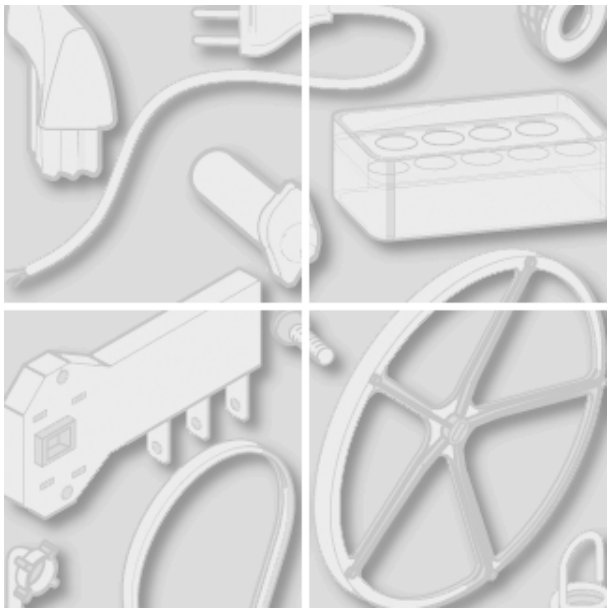

Model type:
FD98P.1 MR

Commercial code:
F028353

General notes

Technical Documentation guidelines

You can find herewith some generic information to simplify cunsulting of technical documentation:

1. Models of same range share the same exploded views, which report the richest set of spare parts:generally, a model does not necessarly have a related spare part for each particular shown on exploded views.

2. Some spare parts can not be represented directly on the exploded views (instruction booklets, specific kit, etc...). You can find those codes in the spare parts list with the same reference of particular where spares are installed or with references 099, 999. Instruction booklets, once managed, appear with 000 reference.

3. On the higher right site of each exploded view there is a serial number which indicates the beginning of the production of certain range:some models might have more than an exploded view for a given category, each distinguished by a different serial no.and linked to another spare parts list, In this case, serial no. is required to supply the right spare part code. Exploded view to be considered is the one with a more recent serial no. but previous than the one of the model that needs assistance.

4.Exploded views might require further updates even after publishing. Addition of new spares will go on following the already existing numeration references. Revision number of an exploded view is shown into last four digits of serial number into upper right hand corner.

5.The spare parts list associated to an exploded view shows related codes of spares managed for a certain model; for each spare part other informations are available:


REF: reference no of spare into a table; SUBSTITUTE: list of spare(s) which can replace a code but that keeps same functional characteristics

INDUSTRIAL CODE: list of variables of a model (shown into model label) where such spare is used; NOTICE: code of information(s) to refer to complete technical intervention, track for changes or to find correct spare part code.

6. Some notices, into a same section are generic therefore cannot be directly linked to a spare part. In order to assist a model in the best way as possible, it is helpful to pay attention to all notices and constantly verify documentation updates

7.Technical documentation cover shows model name and its commercial codes


4504150 Exploded views

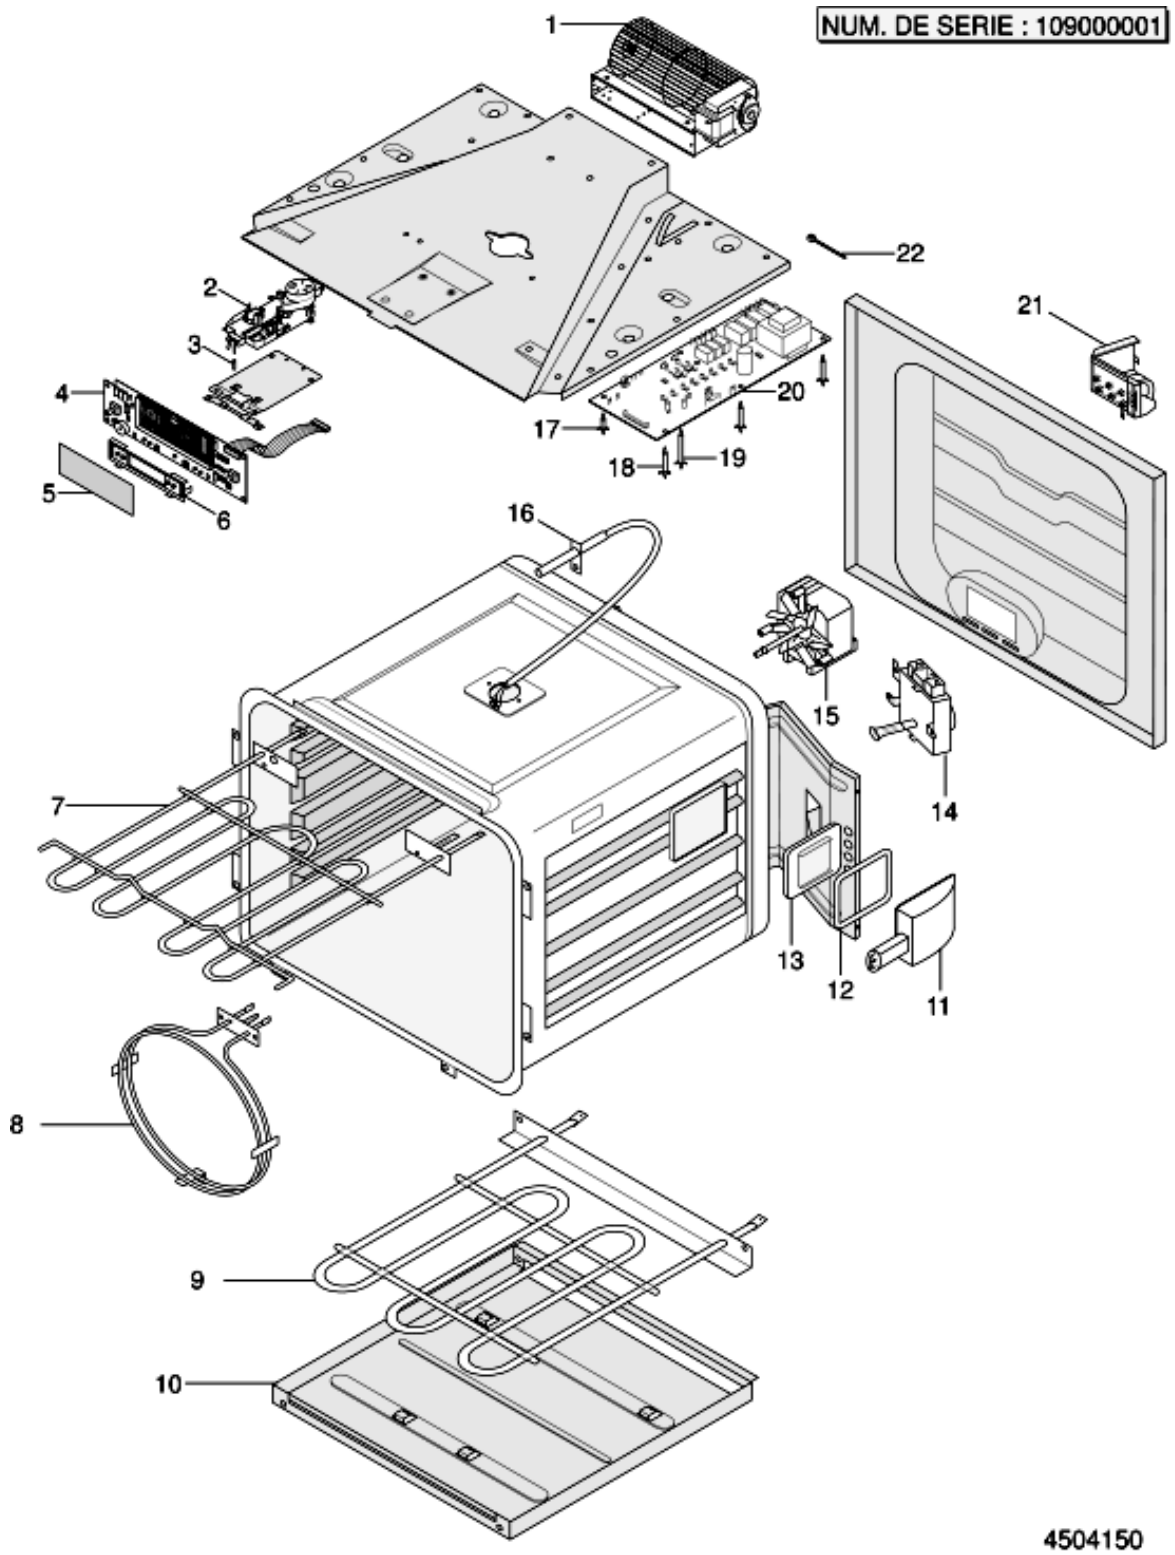

4504150 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
001	C00138845			1 x C00255068	tangential fan		
002	C00138846				locking system eltek		
003	C00139406				locking system seal		
004	C00092680				display card##		
006	C00084740				programmer band		
007	C00140135				upper grill heating element		
008	C00138834				round heating element		
009	C00138830				lower heating element 1500w		
010	C00138829				lower heating element box		
011	C00121824			1 x C00015910	lamp 15w		
011	C00138833		01012...		box & lamp		
011	C00273472	01013...			lamp box + lamp + glass		
012	C00132815				lamp seal		
013	C00132816				lamp holder glass		
014	C00082359				turnspit motor		
015	C00138826			3 x C00133741 1 x C00140299	circulating fan motor		
016	C00138851				probe		
017	C00138848				brace lcbs-8-12-01		
018	C00138847				brace lcbs-8-18-01		
019	C00140134				brace scisr-08 ht35		
020	C00140132				power board digital pyro		
021	C00136759				terminal block (6 points)		
022	C00121825				cable attachment type plt1m white		
099	C00086747				radio interference soppressor		


4504190 Exploded views

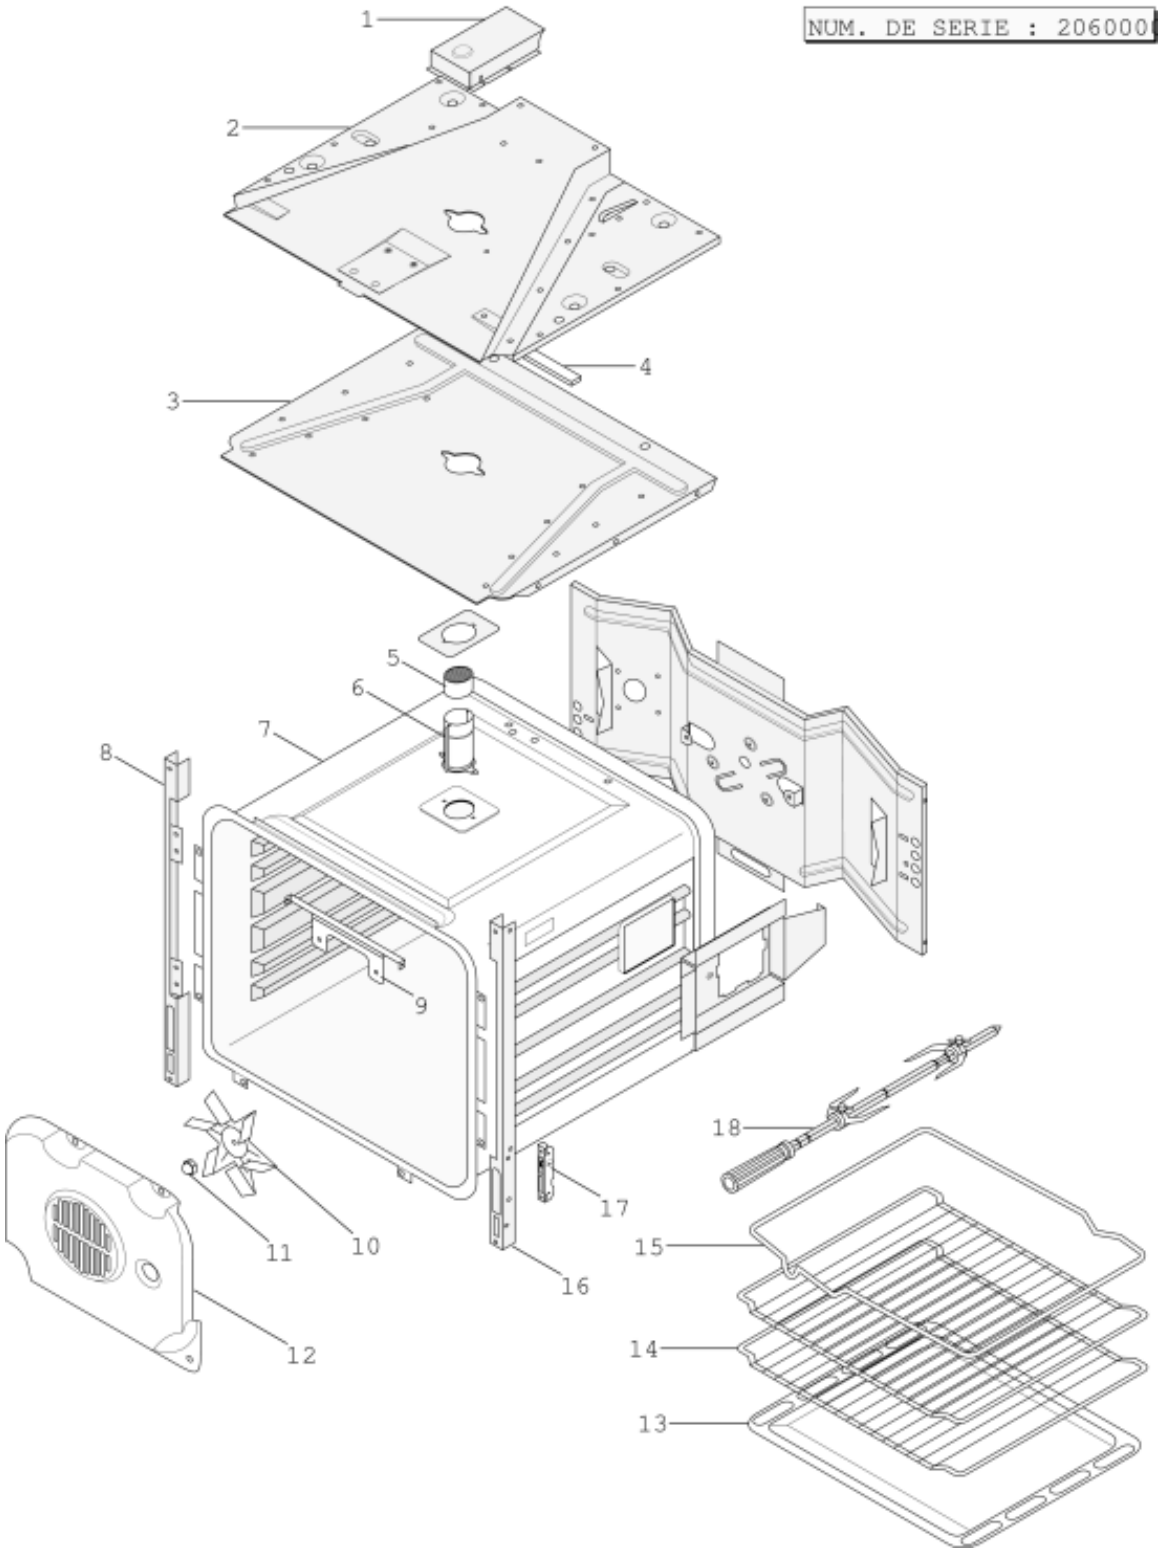

4504190 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
001	C00084751			1 x C00143453	evac.conduit,rr preassembled		
002	C00091898			1 x C00098841	drain conduct panel		
003	C00091897			1 x C00098842	closing panel		
004	C00138844				tangential fan seal		
005	C00125223			1 x C00098848	ceramic catalyser		
006	C00138831				chimney		
007	C00140129			1 x C00099767	enamelled cavity		
008	C00083864			1 x C00144563	lh oven door hinge support		
010	C00138825				fan propeller		
011	C00138824				fan nut		
012	C00135233				pan hold.screw rlx nø8-9,5		
012	C00138835			1 x C00099549	heat distribution panel		
013	C00137834				drip tray - black enamelled pyro		
014	C00138868				cake grate		
015	C00138869				rotisserie shelf		
016	C00083863			1 x C00144562	hinge gas roller supp+roller right		
017	C00090857			1 x C00131242	hinge support		
018	C00082367				turnspit f2000		
099	C00138827				rear panel insulating matress		
099	C00138828				resistor box insulation		
099	C00138832			1 x C00109940	oven cavity insulation matress		

4504240 Exploded views

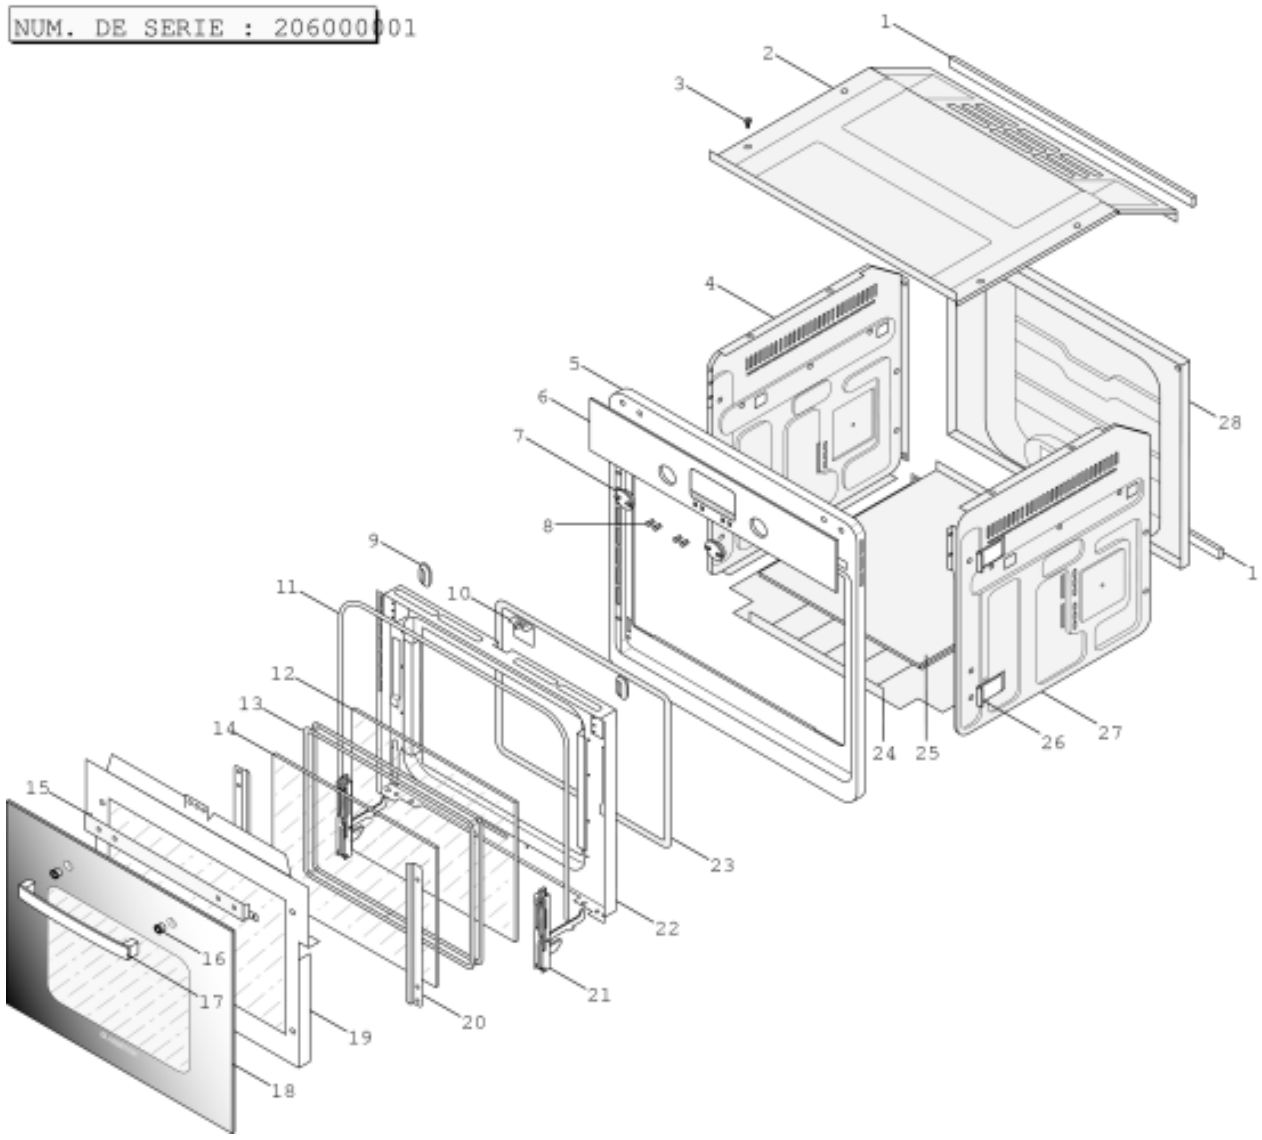

4504240 Spare parts list


Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
000	C00092777				user instructions fr-it-gb-de		
000	C00092778				user instructions es-pt-nl		
000	C00092802				cooking book		
000	C00092803				cooking book gb		
001	C00132719			1 x C00275415	seal 13x8		
002	C00138855				upper panel		
003	C00133741				screw cblx nø8x9,5 cf		
004	C00081570			1 x C00111655	side panel left		
005	C00092666			1 x C00109363	enamelled front bk		
006	C00092804			1 x C00109552	bonded control panel glass mr		
007	C00092865				knob bk		
008	C00092801				rubber button (electronic		
009	C00090836				inner door plug		
010	C00138867				locking system eltek		
011	C00090839				packing inner door		
012	C00138858			1 x C00111527	glass 296x416 mm		
013	C00138859				thermocord seal		
014	C00138860				pyro thermax glass 297x418		
015	C00091630				handle crosspiece		
016	C00059820				spacer-door handle diamond		
017	C00090864				handle		
017	C00121939				washer fan-shaped m5		
017	C00139518			1 x C00078880	handle screw m5x15 t20		
018	C00091667			1 x C00109412	bonded oven door glass mr		
019	C00138906			1 x C00094461	glued flow distribution screen		
020	C00138861			1 x C00265070	enamelled glass square		
021	C00091662		80127...		door hinge		
021	C00264057	80128...			hinge for oven door pyro 4glass		
022	C00090847				fixing bracket inner door/door		
022	C00091465			1 x C00099721	enamelled door		
023	C00138863				pyroclips seal		
024	C00082486				oven bottom cover		
025	C00138841				base panel deflector		
026	C00082487				cabinet fixing square		
027	C00081569			1 x C00111653	side panel right		

4504240 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
028	C00138856				rear panel		

Electric schemes and links

Cod. c_FO98P.cad

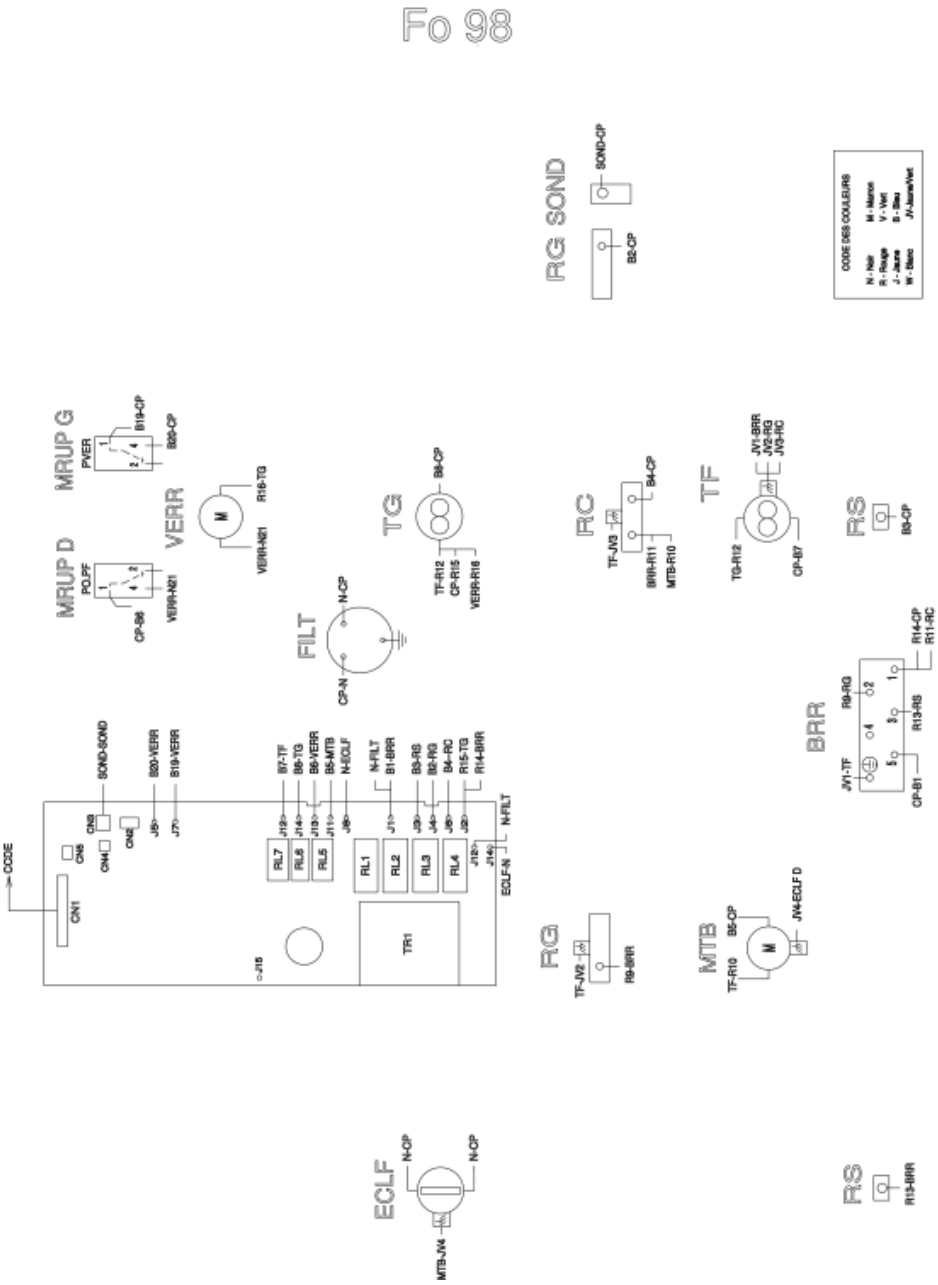

Legend

Legend: c_FO98P.cad

ADD	Additional	MRUP	Micro-switch
ALL	Igniter	MTB	Turnspit motor
AP	Antijamming	MVER	Locking motor
ARD	Rear right	N	Black
ARG	Rear left	NCOM	Selector level
AUTO	Automatic	NMAG	Magnetron level
AVD	Front right	NMOU	Oven cavity level
AVG	Front left	NOT1	The contacts are marked with the first letter of t
B	Blue	NOT2	The contacts preceded by an asterisk refer to the
BAND	Rim	NOT7	The closing motor is always on the side where
BCUE	Barbecue	NOT8	7 points slot-in connector
BPMO	Micro-waves pushbutton	NOT9	Terminal spade tag situated on the card
BRR	Connection terminal board	NOTA	The circled numbers correspond to those of the
BRUL	Burner	NU	Not used
C	Condenser	Ne	Neon lamp
CAD	Board	OPT	Optional
CB	Ventilated heat	P	Plate
CBIP	Two-pole switch	PAB	Terminal strip
CCOD	Card	PATI	Pastry
CCOM	Selector board	PBD	Bottom right door
CCON	Connector board	PCOM	Selector strip
CDIF	Diffuser card	PED	Right door
CFx	Female connector	PEG	Left door
CI	Printed circuit	PEVI	Low speed
CME	Electronic timer	PF	Door Closed
CMO	Micro-wave condenser	PHD	Upper right door
CMx	x-Male connector	PHG	Upper left door
CNT	Contact	PO	Door Open
COM	Selector	POS	Position
COND	Conditions	POT	Potentiometre
CONM	Micro-control	PP	Door present
CONx	x-Connector	PPRI	Primary door
CPF	Closed door contact	PR	Programmer


CPR	Programmer card	PRC	Preheating
CPV	Locked door contact	PREL	Electronic programmer
CR	Card relay	PRGR	Programming
CRA	Regulator and display	PRIM	Primary
CTE	Temperature card	PSO	Probe pike
CTH	Thermostat disk	PVER	Door locked
CTHE	Electronic thermostat	PYRO	Pyrolysis
CTR	Transformer card	R	Red
CTRI	Three-pole switch	RCL	Light red
CTV	Jack contact	RE	Results
CUCO	Combined cooking	REG	Power regulator
CUIS	Cooking	REGU	Regulation
CV	LED card	RES	Residual
CVAR	Varion board	RG	Grill heating element
CVIS	Visual switch	RL	Relay
CVL	Visual logo card	RLHT	High voltage relay
CVMO	MW visual card	RLPR	Preheating relay
CVT	Visual temperature	ROTI	Turnspit
D	Diode	RP	Door element heating
DE	Power dosing	RS	Lower heating element
DGEL	Defrosting	RST	Heating element
DIFF	Differed	RSTR	Warming up heating element
DOM	Domino	RV	Ceiling heating element
DP	Start	SFON	Function selector
DVER	Unlocking	SOLE	Base element
ECL	Lighting	SOND	Probe
ECLA	Control lighting	STAT	Static
ECLD	Defrost lighting	STEM	Temperature selector
ECLF	Oven lighting	STH	Thermal safety
EL	Lighting lamp	SW	Switch
ENEL	Electronic block	T	Temperature
ETUV	Oven	TABB	Control panel
F	Heater	TB	Turn spit
FHUM	Damp bakehouse	TF	Oven turbine
FILT	Filter	TFER	Closing sheeting plate
FNIL	Bakehouse	TG	Tangential turbine
FOUR	Oven	TH	Thermostat
FSC	Wires soldered to card	THCT	Touch thermostat
FSEC	Dry bakehouse	THCU	Cooking thermostat
FUS	Fuse	THEL	Electronic thermostat
G	Earth	THPY	Thermostat pyro
GDVI	High speed	THS	Safety thermostat
GGO	Wave guide	TR	Transformer
GOND	Wave guide	TRAD	Tradition
GR	Grey	TRIS	Isolating transformer
GRAT	Browning	TURB	Turbine
GRIL	Grill	U	Voltage
GRVE	Ventilated grill	UA	Alternated current

IALL	Igniter switch	UC	Direct current
IMO	Microwave switch	V	Green
INT	Switch	VALI	Validation
INV	Inverser	VAR	Variation
INVT	Turbine inverter	VCL	Light green
INx	Pyrocontact indexing controlled by Px-xa of the	VE	Fan
IT	Turbine switch	VEMG	Magnetron fan
ITH	Theoretical intensity	VENT	Ventilated
ITV	Turbine switch + LED	VERR	Locking
IV	LED switch	VO	LED
IVVE	Switch + fan LED	VOAL	Power LED
J	Yellow	VOCA	Board LED
J/V	Yellow/green	VOCC	Selector board LED
MAG	Magnetron	VOD	Disc LED
MANU	Manual	VOFR	Oven LED
MAUV	Violet	VOMO	Micro-wave LED
MCNT	Micro contact	VOPY	Pyrolysis LED
MN	Timer	VOTC	Cooking thermostat board
MNIV	MULTI-LEVEL	VOV	Variation board LED
MO	Micro-wave	VOVE	Locking LED
MOD	Module	VOVT	Fan LED
MOUF	Oven cavity	VTH	Thermal jack
MR	Brown	W	White

Electric schemes and links

Cod. p_FO98P.cad

FO 98

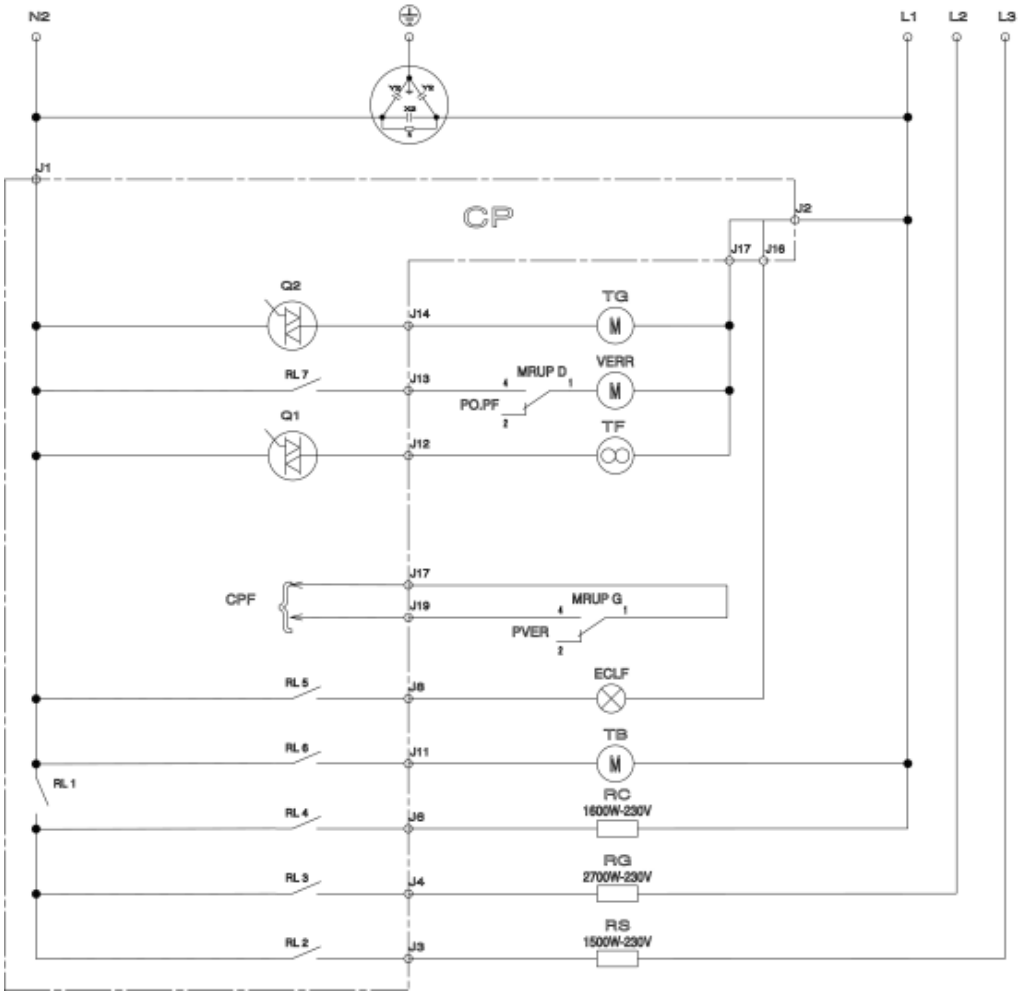

Legend

Legend: p_FO98P.cad

ADD	Additional	MRUP	Micro-switch
ALL	Igniter	MTB	Turnspit motor
AP	Antijamming	MVER	Locking motor
ARD	Rear right	N	Black
ARG	Rear left	NCOM	Selector level
AUTO	Automatic	NMAG	Magnetron level
AVD	Front right	NMOU	Oven cavity level
AVG	Front left	NOT1	The contacts are marked with the first letter of t
B	Blue	NOT2	The contacts preceded by an asterisk refer to the
BAND	Rim	NOT7	The closing motor is always on the side where
BCUE	Barbecue	NOT8	7 points slot-in connector
BPMO	Micro-waves pushbutton	NOT9	Terminal spade tag situated on the card
BRR	Connection terminal board	NOTA	The circled numbers correspond to those of the
BRUL	Burner	NU	Not used
C	Condenser	Ne	Neon lamp
CAD	Board	OPT	Optional
CB	Ventilated heat	P	Plate
CBIP	Two-pole switch	PAB	Terminal strip
CCOD	Card	PATI	Pastry
CCOM	Selector board	PBD	Bottom right door
CCON	Connector board	PCOM	Selector strip
CDIF	Diffuser card	PED	Right door
CFx	Female connector	PEG	Left door
CI	Printed circuit	PEVI	Low speed
CME	Electronic timer	PF	Door Closed
CMO	Micro-wave condenser	PHD	Upper right door
CMx	x-Male connector	PHG	Upper left door
CNT	Contact	PO	Door Open
COM	Selector	POS	Position
COND	Conditions	POT	Potentiometre
CONM	Micro-control	PP	Door present
CONx	x-Connector	PPRI	Primary door
CPF	Closed door contact	PR	Programmer

CPR	Programmer card	PRC	Preheating
CPV	Locked door contact	PREL	Electronic programmer
CR	Card relay	PRGR	Programming
CRA	Regulator and display	PRIM	Primary
CTE	Temperature card	PSO	Probe pike
CTH	Thermostat disk	PVER	Door locked
CTHE	Electronic thermostat	PYRO	Pyrolysis
CTR	Transformer card	R	Red
CTRI	Three-pole switch	RCL	Light red
CTV	Jack contact	RE	Results
CUCO	Combined cooking	REG	Power regulator
CUIS	Cooking	REGU	Regulation
CV	LED card	RES	Residual
CVAR	Varion board	RG	Grill heating element
CVIS	Visual switch	RL	Relay
CVL	Visual logo card	RLHT	High voltage relay
CVMO	MW visual card	RLPR	Preheating relay
CVT	Visual temperature	ROTI	Turnspit
D	Diode	RP	Door element heating
DE	Power dosing	RS	Lower heating element
DGEL	Defrosting	RST	Heating element
DIFF	Differed	RSTR	Warming up heating element
DOM	Domino	RV	Ceiling heating element
DP	Start	SFON	Function selector
DVER	Unlocking	SOLE	Base element
ECL	Lighting	SOND	Probe
ECLA	Control lighting	STAT	Static
ECLD	Defrost lighting	STEM	Temperature selector
ECLF	Oven lighting	STH	Thermal safety
EL	Lighting lamp	SW	Switch
ENEL	Electronic block	T	Temperature
ETUV	Oven	TABB	Control panel
F	Heater	TB	Turn spit
FHUM	Damp bakehouse	TF	Oven turbine
FILT	Filter	TFER	Closing sheeting plate
FNIL	Bakehouse	TG	Tangential turbine
FOUR	Oven	TH	Thermostat
FSC	Wires soldered to card	THCT	Touch thermostat
FSEC	Dry bakehouse	THCU	Cooking thermostat
FUS	Fuse	THEL	Electronic thermostat
G	Earth	THPY	Thermostat pyro
GDVI	High speed	THS	Safety thermostat
GGO	Wave guide	TR	Transformer
GOND	Wave guide	TRAD	Tradition
GR	Grey	TRIS	Isolating transformer
GRAT	Browning	TURB	Turbine
GRIL	Grill	U	Voltage
GRVE	Ventilated grill	UA	Alternated current

IALL	Igniter switch	UC	Direct current
IMO	Microwave switch	V	Green
INT	Switch	VALI	Validation
INV	Inverser	VAR	Variation
INVT	Turbine inverter	VCL	Light green
INx	Pyrocontact indexing controlled by Px-xa of the	VE	Fan
IT	Turbine switch	VEMG	Magnetron fan
ITH	Theoretical intensity	VENT	Ventilated
ITV	Turbine switch + LED	VERR	Locking
IV	LED switch	VO	LED
IVVE	Switch + fan LED	VOAL	Power LED
J	Yellow	VOCA	Board LED
J/V	Yellow/green	VOCC	Selector board LED
MAG	Magnetron	VOD	Disc LED
MANU	Manual	VOFR	Oven LED
MAUV	Violet	VOMO	Micro-wave LED
MCNT	Micro contact	VOPY	Pyrolysis LED
MN	Timer	VOTC	Cooking thermostat board
MNIV	MULTI-LEVEL	VOV	Variation board LED
MO	Micro-wave	VOVE	Locking LED
MOD	Module	VOVT	Fan LED
MOUF	Oven cavity	VTH	Thermal jack
MR	Brown	W	White