
INDESIT company

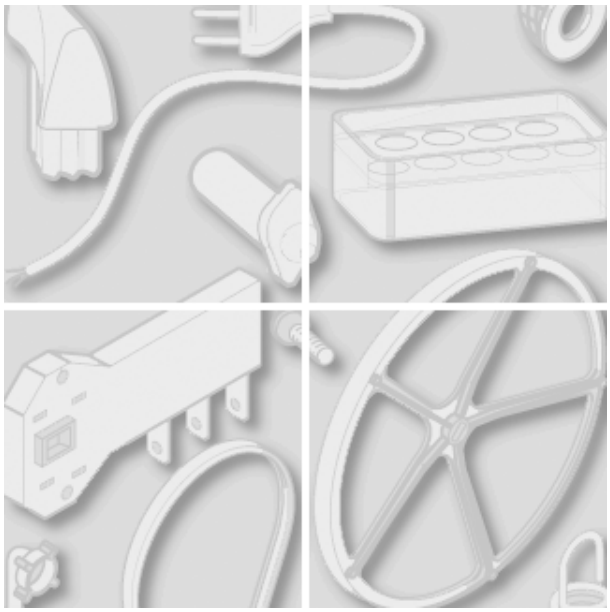

Model type:

VRA 640 C

VRA640C

Commercial code:

F053062

General notes

Technical Documentation guidelines

You can find herewith some generic information to simplify cunsulting of technical documentation:

1. Models of same range share the same exploded views, which report the richest set of spare parts:generally, a model does not necessarly have a related spare part for each particular shown on exploded views.

2. Some spare parts can not be represented directly on the exploded views (instruction booklets, specific kit, etc...). You can find those codes in the spare parts list with the same reference of particular where spares are installed or with references 099, 999. Instruction booklets, once managed, appear with 000 reference.

3. On the higher right site of each exploded view there is a serial number which indicates the beginning of the production of certain range:some models might have more than an exploded view for a given category, each distinguished by a different serial no.and linked to another spare parts list, In this case, serial no. is required to supply the right spare part code. Exploded view to be considered is the one with a more recent serial no. but previous than the one of the model that needs assistance.

4.Exploded views might require further updates even after publishing. Addition of new spares will go on following the already existing numeration references. Revision number of an exploded view is shown into last four digits of serial number into upper right hand corner.

5.The spare parts list associated to an exploded view shows related codes of spares managed for a certain model; for each spare part other informations are available:


REF: reference no of spare into a table; SUBSTITUTE: list of spare(s) which can replace a code but that keeps same functional characteristics

INDUSTRIAL CODE: list of variables of a model (shown into model label) where such spare is used; NOTICE: code of information(s) to refer to complete technical intervention, track for changes or to find correct spare part code.

6. Some notices, into a same section are generic therefore cannot be directly linked to a spare part. In order to assist a model in the best way as possible, it is helpful to pay attention to all notices and constantly verify documentation updates

7.Technical documentation cover shows model name and its commercial codes

4370110 Exploded views

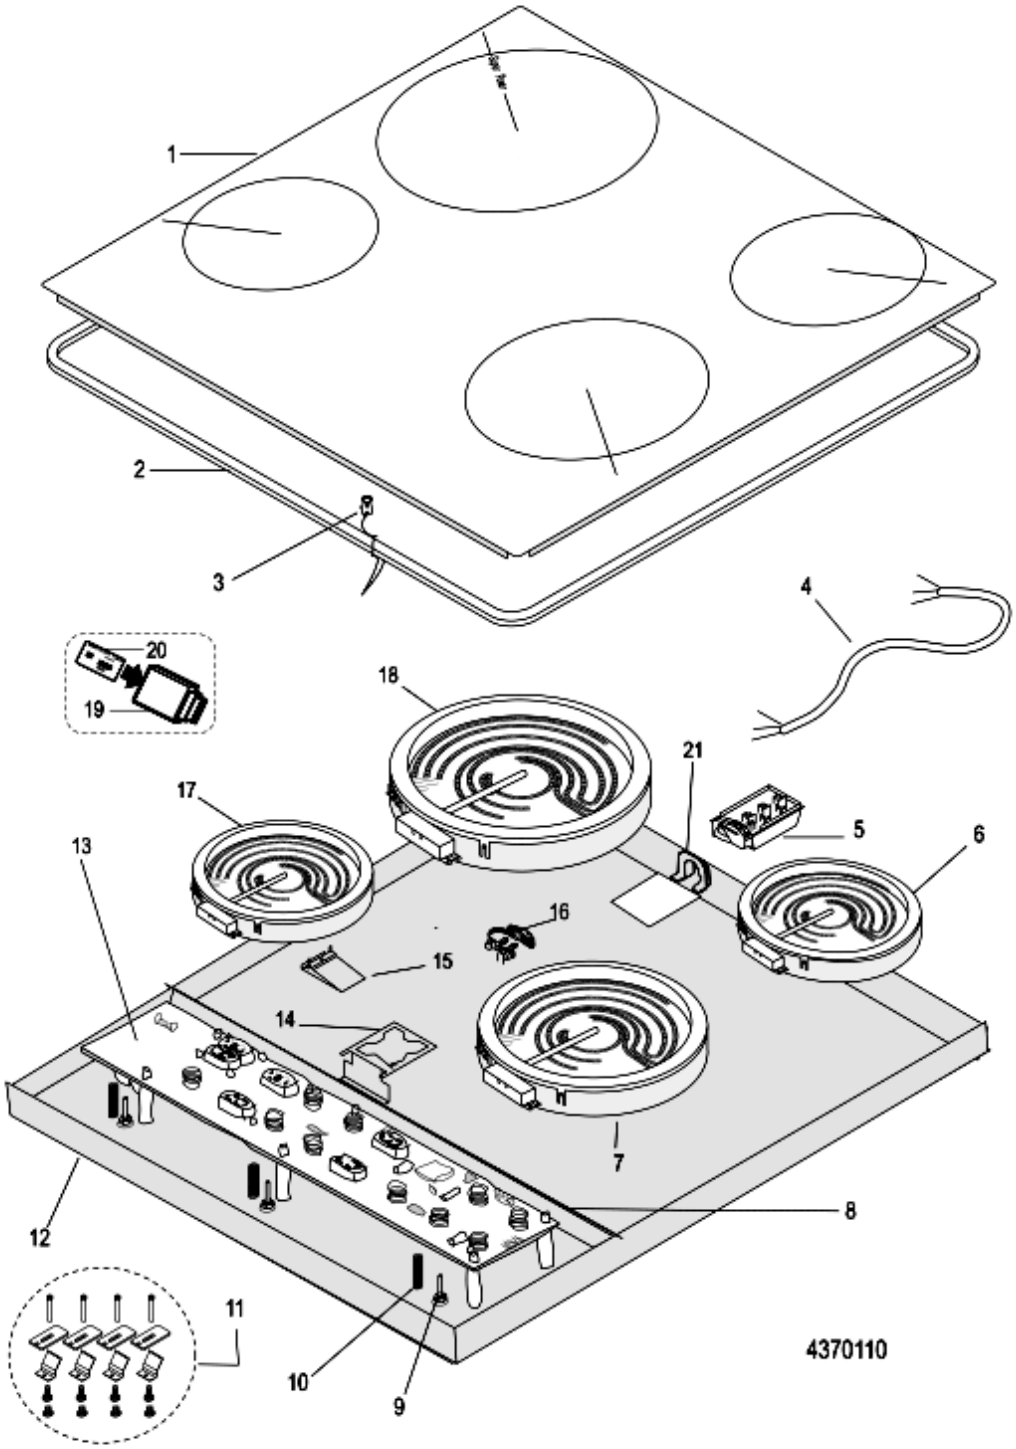

4370110 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
001	C00265716		00224...	1 x C00286635	ceramic hob top black colour vra	n1009i00	
001	C00295764	00225...			ceramic hob top black colour vra	n1012k01	
002	C00275415				kit worktop - hob seal 5x6x2450		
003	C00192903				this item is not fitted to this model		
004	C00144140			1 x C00273322	power cord 25a 6x1,5		
005	C00264621				junction block		
006	C00259729				heater, hi-li 1400w d180		
007	C00264626				heater, 1800w/230v d.200 s/spia		
008	C00136521				seal		
008	C00264630				fitting flange vtc		
009	C00126039				nut, tensilock bn 80014 dia.5		
009	C00265920				support fixet main board l=38		
010	C00112339				keys board spring		
011	C00142145				kit hob fixing		
012	C00264625				base cover kra 640 c		
013	C00264624		91129...	1 x C00270564	touch module + file setting hobs	n0510d00	44530620000
013	C00279227	91130...	00224...		touch module stand-by	n0510d00	44530620100
013	C00295763	00225...			touch module ego	n1012k00	44530620200
014	C00192903				this item is not fitted to this model		
015	C00096965		11119...		fixing spring		
015	C00290792	11120...			fixing spring		
016	C00192903				this item is not fitted to this model		
017	C00260941				heater, 1200w/230v d=165		
018	C00264629				heater, 2300w/d230 fu s/spia		
019	C00272306				smart reader for card 8kb 32kb +		
020	C00270495		91129...		card 8kb sw 50529600003	n0510d00	44530620000
020	C00276594	91130...			card 8kb sw 50529600005	n0510d00	44530620100
099	C00143348				cord lead		
999	C00274135				service manual		

Notices

n0510d00: Models Manufactured with Stand-by Mode

From August 2009 and over the following months these models are manufactured with a stand by mode. The spare parts involved are: Module and Setting File.
It is not possible to use the new components on premodification models.

POWER BOARD & SMART CARD

PRIVATE & TRADE CUSTOMERS ONLY
This model uses a Power Board and a Smart Card file.
To programme the Power Board you will need to use a Smart Card Reader part code C00252539.
For the correct Smart Card programme file check the part code in Partfinder, on Partfinder CD or Trade Place parts list.
Note:
The programmed Smart Card can only be used for one programming application.

INDESIT COMPANY EMIT USERS ONLY
To programme the Power Board you will need to download the file from your Emit using a Hardware Key.
For the correct programme file check the part code (Smart Card file) listed in Partfinder.

n1009i00: Elimination of the gasket in production line.

In all ceramic hobs mentioned by this notice the factory has terminated to fit the bottom gasket on the ceramic glass in production line.
In case of substitution of the ceramic glass it is necessary to order also a new gasket with the SAT code C00275415

n1012k00: New Touch Board Introduced

---

n1012k01: new worktop introduced

Electric schemes and links

Cod. 16002281801

Legend

Legend: 16002281801