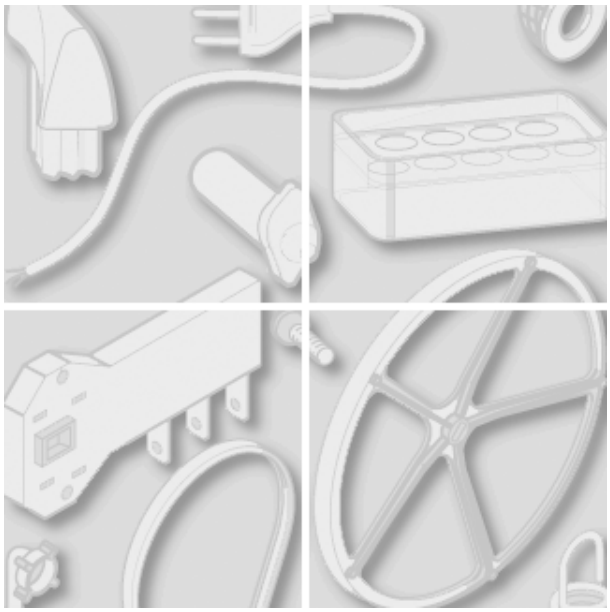
INDESIT company



Model type:
KME2(IX)/HA

Commercial code:
F048157

General notes

Technical Documentation guidelines

You can find herewith some generic information to simplify cunsulting of technical documentation:

1. Models of same range share the same exploded views, which report the richest set of spare parts:generally, a model does not necessarly have a related spare part for each particular shown on exploded views.

2. Some spare parts can not be represented directly on the exploded views (instruction booklets, specific kit, etc...). You can find those codes in the spare parts list with the same reference of particular where spares are installed or with references 099, 999. Instruction booklets, once managed, appear with 000 reference.

3. On the higher right site of each exploded view there is a serial number which indicates the beginning of the production of certain range:some models might have more than an exploded view for a given category, each distinguished by a different serial no.and linked to another spare parts list, In this case, serial no. is required to supply the right spare part code. Exploded view to be considered is the one with a more recent serial no. but previous than the one of the model that needs assistance.

4.Exploded views might require further updates even after publishing. Addition of new spares will go on following the already existing numeration references. Revision number of an exploded view is shown into last four digits of serial number into upper right hand corner.

5.The spare parts list associated to an exploded view shows related codes of spares managed for a certain model; for each spare part other informations are available:

REF: reference no of spare into a table; SUBSTITUTE: list of spare(s) which can replace a code but that keeps same functional characteristics

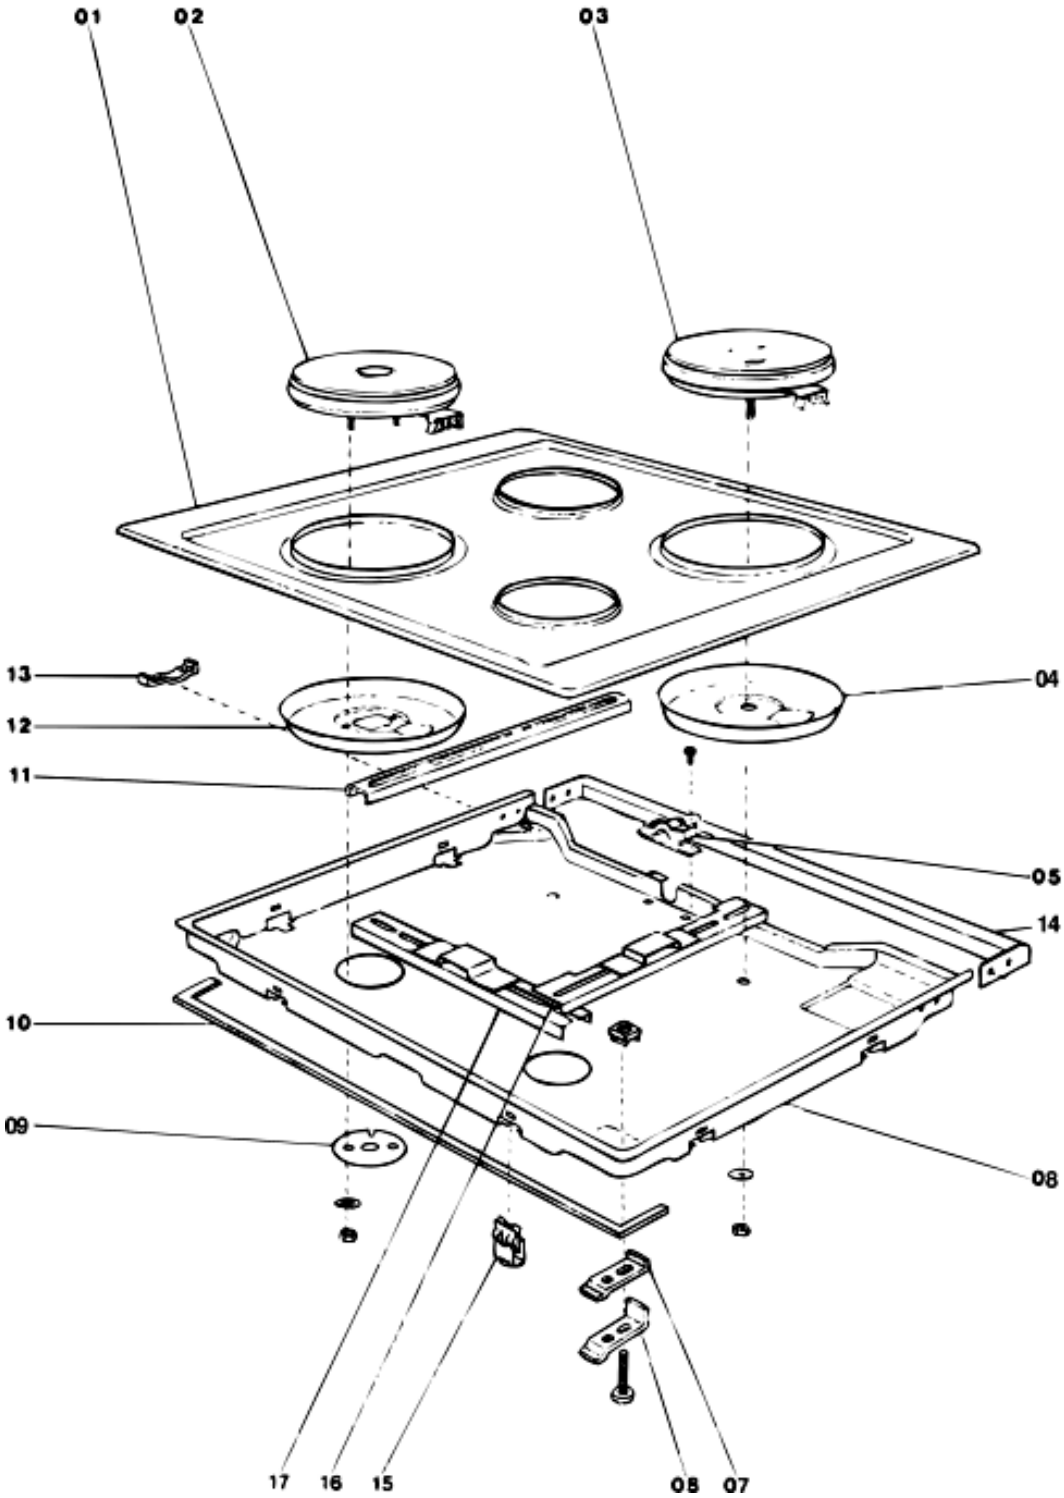
INDUSTRIAL CODE: list of variables of a model (shown into model label) where such spare is used; NOTICE: code of information(s) to refer to complete technical intervention, track for changes or to find correct spare part code.

6. Some notices, into a same section are generic therefore cannot be directly linked to a spare part. In order to assist a model in the best way as possible, it is helpful to pay attention to all notices and constantly verify documentation updates

7.Technical documentation cover shows model name and its commercial codes

4170530 Exploded views

MATR.30615.0001



4170530 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
000	C00086327				user instructions booklet kme2		
001	C00025440				stainless steel working table		
002	C00033379				hotplate d145n.1000watt 220v		
003	C00030938				electric plate d=180 220v 2kv		
005	C00025441				lead clamp		
006	C00025435				cooking table box		
009	C00025436				protection panel plate		
010	C00018723			1 x C00018819	sealing gasket - hob/worktop		
015	C00020855				fixing hoox		
099	C00002457				washer 6,2x11x0,7		
099	C00009296			1 x C00002506	nut m6x6x10		
099	C00092141				terminal connector 5w		

Notices

n1015019: Connection Connector Kits for New Ovens - Old Cook tops and Old Ovens - New Cook tops.

Connection Kits have been realized to assist in connecting the new ovens to the old cook tops and new cook tops to the old ovens.

The codes of the new items are as follows:

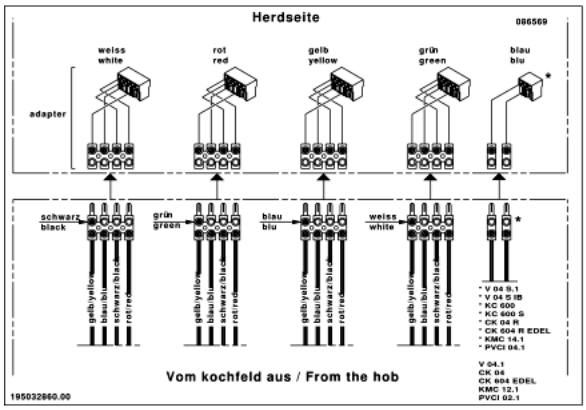
Code SAT 086569 - Connection Kit for old cook tops and new ovens;
Code SAT 086570 - Connection Kit for new cook tops and old ovens;

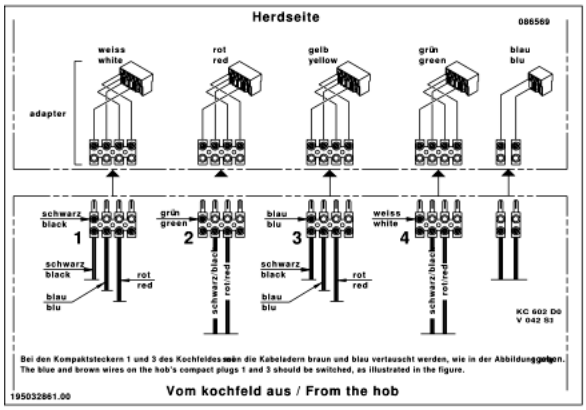
The Kit code SAT 086569 is also equipped with 3 specific diagrams that highlight the connections to be performed, and the same for the Kit 086570.

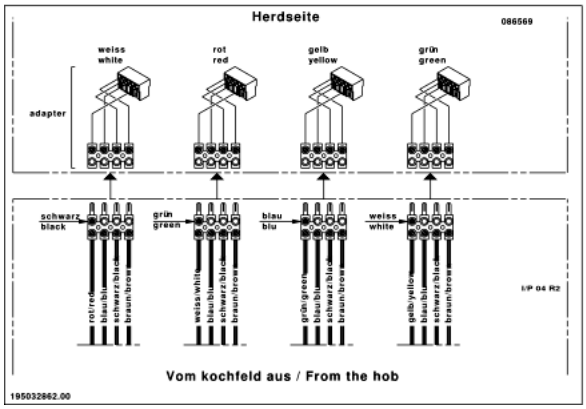
Where the Kit 086569 is used you will need to check the match code on the diagram to the cook top model.
The same procedure is to be performed for the kit 086570.

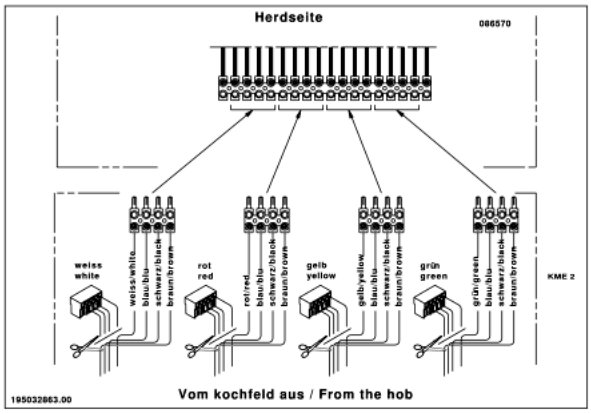
In order to simplify the matching of the kit, we have realized in the enclosed diagrams to this Notice the following four diagrams:

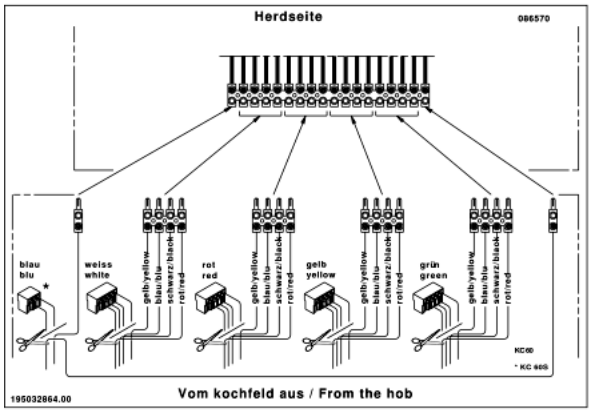
1) Table A referred to the code SAT 086569 for all models of New Ovens - Old Cook tops.
2) Table B referred to the code SAT 086570 for all models of Old Ovens - New Cook tops.
3) Connections diagram kit code SAT 086569;
4) Connections diagram kit code SAT 086570.

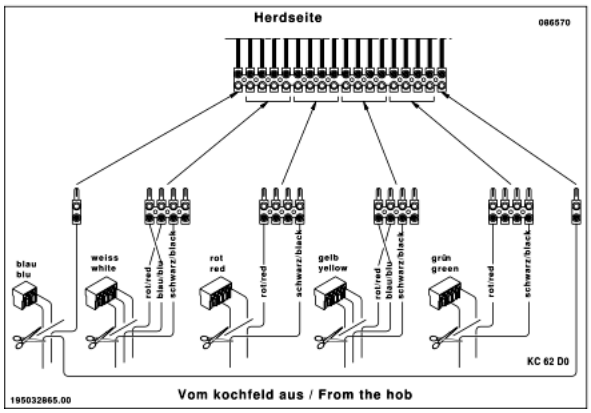

Herdseite
086569
weiss white
rot red
gelb yellow
grün green
blau blu
adapter
schwarz black
grün green
blau blu
weiss white
* V 04 S.1
* V 04 S IB
* KC 600
* KC 600 S
* CK 04 R
* CK 604 R EDEL
* KMC 14.1
* PVCI 04.1
V 04.1
CK 04
CK 604 EDEL
KMC 12.1
PVCI 02.1
Vom kochfeld aus / From the hob
195032860.00


Herdseite
086569
weiss white
rot red
gelb yellow
grün green
blau blu
adapter
schwarz black
grün green
blau blu
weiss white
1
2
3
4
schwarz black
rot red
blau blu
KC 602 D0
V 042 S3
Bei den Kompaktsteckern 1 und 3 des Kochfeldes sollen die Kabeladern braun und blau vertauscht werden, wie in der Abbildung gezeigt.
The blue and brown wires on the hob's compact plugs 1 and 3 should be switched, as illustrated in the figure.
Vom kochfeld aus / From the hob
195032861.00


Herdseite
086569
weiss white
rot red
gelb yellow
grün green
adapter
schwarz black
grün green
blau blu
weiss white
I/P 04 R2
Vom kochfeld aus / From the hob
195032862.00


Herdseite
086570
weiss white
rot red
gelb yellow
grün green
KME 2
195032863.00
Vom kochfeld aus / From the hob


Herdseite
086570
blau blu
weiss white
rot red
gelb yellow
grün green
KC60
* KC 665
195032864.00
Vom kochfeld aus / From the hob


Herdseite
086570
blau blu
weiss white
rot red
gelb yellow
grün green
KC 62 D0
195032865.00
Vom kochfeld aus / From the hob

NT007300

KIT CONNETTORI	NUOVI FORNI		VECCHI PIANI	
086569	26501	HB 10 A (ALU)	18199	KC 600 BK
086569	26498	HB 10 A (BK)	18197	KC 600 BR
086569	26499	HB 10 A IX	18200	KC 600 IX
086569	26500	HB 10 A (OW)	18201	KC 600 OW
086569	26497	HB 10 A (WH)	18203	KC 600 S IX
086569	26976	HB 20 AC (WH)	18198	KC 600 WH
086569	26977	HB 22 AC IX	18207	KC 602 DO BK
086569	26978	HB 22 AC (WH)	18205	KC 602 DO BR
086569	26505	HB 50 A (ALU)	18208	KC 602 DO IX
086569	26503	HB 50 A (BK)	18206	KC 602 DO WH
086569	25891	HB 50 A IX	25069	KME 4 IX AR
086569	26504	HB 50 A (OW)	05705	I-P04R2(BK)/KM04(BK)
086569	26502	HB 50 A (WH)	04148	I-P04R2(BR)/KM04(BR)
086569	26507	HB 50 ER (ALU)	25070	I-P04R2 IX IN
086569	26506	HB 50 ER IX	00594	I-P04R2 IX /KM04 CN
086569	26987	HB 52 AC (BK)	16819	I-P04R2(OW)/KM04(OW)
086569	26986	HB 52 AC (WH)	00595	I-P04R2(WH)/KM04(WH)
086569	26985	HB 52 C IX		
086569	26996	HB 56 C (BK)		
086569	26994	HB 56 C IX		
086569	26995	HB 56 C (WH)		
086569	26509	HO 10 (ALU)		
086569	26510	HO 10 (BM)		
086569	26508	HO 10 IX		
086569	26512	HO 50 (ALU)		
086569	26513	HO 50 (BM)		
086569	26511	HO 50 IX		
086569	26997	HO 87 EC IX		
086569	26515	HO 87 EF (ALU)		
086569	26516	HO 87 EF (BM)		
086569	26514	HO 87 EF IX		

NT007400

086570	5469	HS10.1 (BR)	26639	KC 60 BK
086570	5470	HS10.1 (WH)	26637	KC 60 IX
086570	5473	HS10.1 (BK)	26638	KC 60 OW
086570	5474	HS10.1 IX	26636	KC 60 S IX
086570	5475	HM10 (BR)	26635	KC 60 WH
086570	5476	HM10 (WH)	27504	KC 61 D IX
086570	5477	HM10 (BK)	27452	KC 62 DO (BK)
086570	5478	HM10 IX	26640	KC 62 DO IX
086570	5479	HM27V (BR)	27453	KC 62 DO (WH)
086570	5480	HM27V (WH)	26620	KME 2 (IX)
086570	5481	HM27V (BK)	26619	KME 2 (OW)
086570	5487	HM34T (AN)	26617	KME 2 (WH)
086570	5486	HM34T (WH)	26618	KME 2 (BK)
086570	6267	HM27V (BK)		
086570	6268	HM27V (WH)		
086570	6269	HM34T (AN)		
086570	6270	HM34T (WH)		
086570	6271	HS100.1 (BK)		
086570	6273	HS100.1 (WH)		
086570	6275	HS100.1 (IX)		
086570	6398	HM10 V(MF)		
086570	6526	HS10.1 V(MF)		
086570	6530	HS 101 (WH)		
086570	6531	HS 101 (BR)		
086570	8394	HS10.1 EG		
086570	8395	HS10.1 BB		
086570	8396	HS 10.1 (AG)		
086570	8397	HS10.1 D (WG)		
086570	8398	HS10.1 D (BG)		
086570	8399	HS10.1 D (BG)		
086570	13552	HM27 M IX		
086570	13553	HM27 M (AN)		
086570	13554	HM10 M IX		
086570	13555	HM10 M (AN)		
086570	13556	HS10 M IX		
086570	16552	HS 30 (BR)		
086570	16553	HS 30 (WH)		
086570	16554	HS 30 (BK)		
086570	16555	HS 30 IX		
086570	16556	HS 30 G (BK)		
086570	16557	HS 30 G (OW)		
086570	16558	HS 30 G (BR)		
086570	16559	HS 30 (OW)		
086570	16560	HM 50 (BR)		
086570	16561	HM 50 (WH)		
086570	16562	HM 50 (BK)		
086570	16563	HM 50 IX		
086570	16564	HM 54 T (AN)		
086570	16565	HM 54 T (WH)		
086570	16566	HM 54 T (OW)		
086570	16567	HM 87V (BR)		
086570	16568	HM 87V (WH)		
086570	16569	HM 87V (BK)		
086570	16625	HM 50 (OW)		
086570	16626	HM 50 G (BK)		
086570	16627	HM 50 G (OW)		
086570	16628	HM 50 G (BR)		
086570	16125	HM 50 R IX SK		
086570	16126	HM 50 R (WH)SK		
086570	22221	HM 55 R (WH)		
086570	22222	HM 55 R (BK)		
086570	22223	HM 55 R IX		
086570	24017	HS 30 R ALU		
086570	24018	HM 50 R ALU		