
INDESIT company

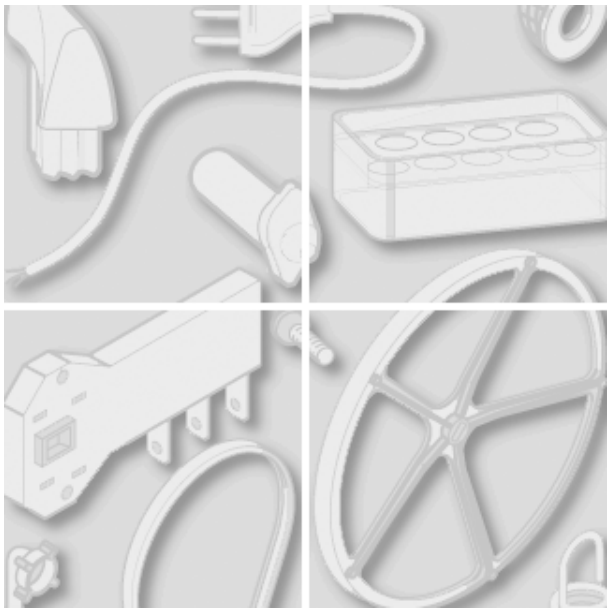

Model type:
LZ700DUOIX

Commercial code:
F033663

General notes

Technical Documentation guidelines

You can find herewith some generic information to simplify cunsulting of technical documentation:

1. Models of same range share the same exploded views, which report the richest set of spare parts:generally, a model does not necessarly have a related spare part for each particular shown on exploded views.

2. Some spare parts can not be represented directly on the exploded views (instruction booklets, specific kit, etc...). You can find those codes in the spare parts list with the same reference of particular where spares are installed or with references 099, 999. Instruction booklets, once managed, appear with 000 reference.

3. On the higher right site of each exploded view there is a serial number which indicates the beginning of the production of certain range:some models might have more than an exploded view for a given category, each distinguished by a different serial no.and linked to another spare parts list, In this case, serial no. is required to supply the right spare part code. Exploded view to be considered is the one with a more recent serial no. but previous than the one of the model that needs assistance.

4.Exploded views might require further updates even after publishing. Addition of new spares will go on following the already existing numeration references. Revision number of an exploded view is shown into last four digits of serial number into upper right hand corner.

5.The spare parts list associated to an exploded view shows related codes of spares managed for a certain model; for each spare part other informations are available:


REF: reference no of spare into a table; SUBSTITUTE: list of spare(s) which can replace a code but that keeps same functional characteristics

INDUSTRIAL CODE: list of variables of a model (shown into model label) where such spare is used; NOTICE: code of information(s) to refer to complete technical intervention, track for changes or to find correct spare part code.

6. Some notices, into a same section are generic therefore cannot be directly linked to a spare part. In order to assist a model in the best way as possible, it is helpful to pay attention to all notices and constantly verify documentation updates

7.Technical documentation cover shows model name and its commercial codes

2210140 Exploded views

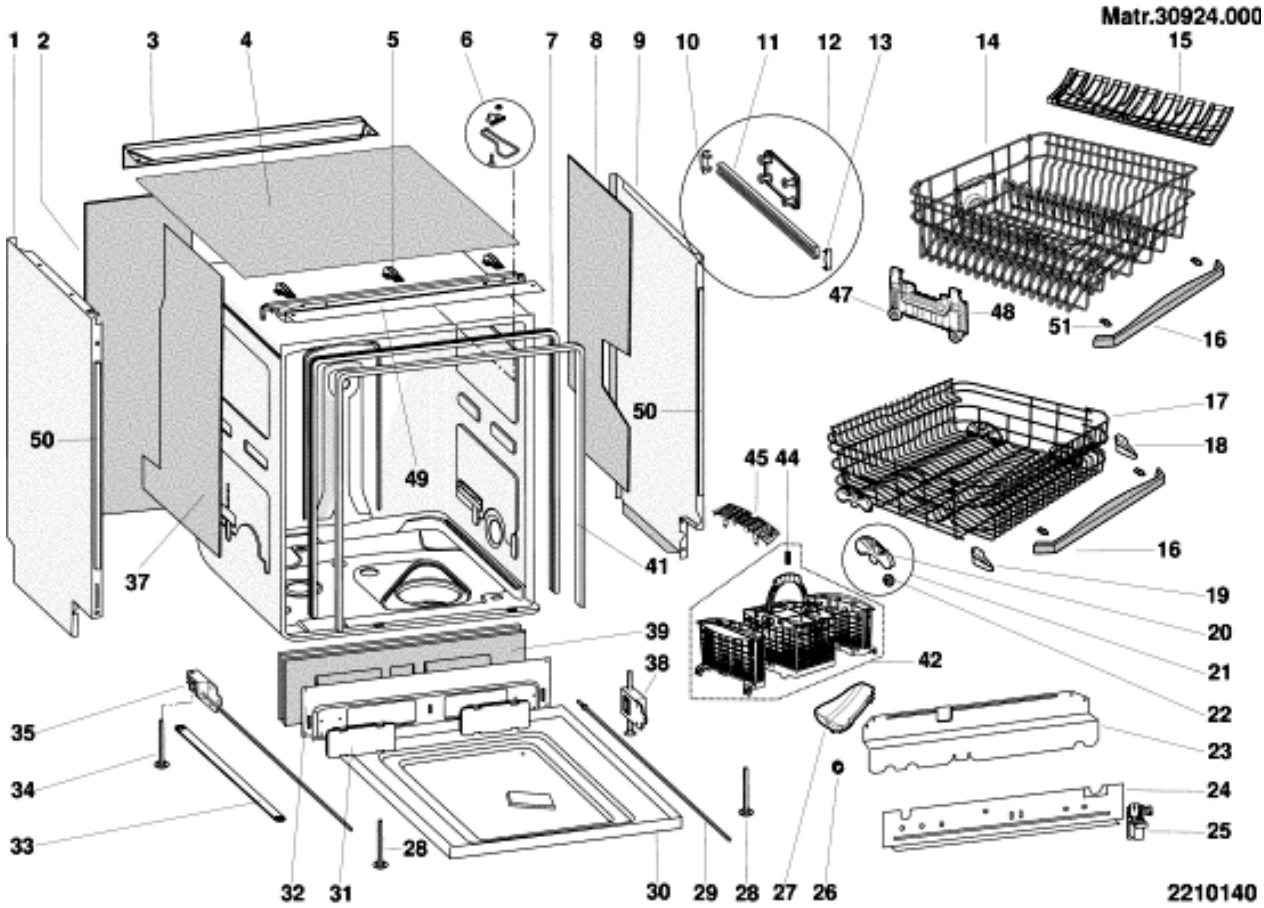


2210140 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
000	C00113151				instruction book it-gb-fr-de-nl-es-		
001	C00092827			1 x C00092835	left side panel lh zinc		
003	C00033591				rear support - top		
004	C00097300			1 x C00141314	insulation panel evo3	n1045127	
004	C00141310				upper panel polionda 60cm evo3	n1045127	
004	C00141314				upper panel insulation evo3	n1045127	
006	C00085024			1 x C00037135	catch plate (cabinet)		
				1 x C00297907			
				1 x C00297909			
				1 x C00297910			
007	C00116110			1 x C00141317	door seal - top and sides mm1608	n1045127	
007	C00141317				top and side door seal (1638mm)	n1045127	
008	C00076388	41223...			soundproofing lateral dx	n1045090	
009	C00092828			1 x C00092835	right side panel lh zinc		
010	C00094117				rail back stop evo3		
011	C00094116			1 x C00094112	basket runner - upper evo3		
012	C00094112				runner assembly		
013	C00094118				runner end stop		
014	C00096049		50315...		upper basket assembly adjustable	n1045106	37336630000
014	C00111300	50316...			upper basket assembly adjustable		37336630100
015	C00096051			1 x C00115000	grey flap upper basket		
016	C00096050				manche basket grey evo3		
017	C00096053			1 x C00275694	grey lower basket		
020	C00086476				roller-lower basket body		
021	C00086474				roller-lower basket assembly		
022	C00086475				roller-lower basket		
023	C00091600				rear support - middle		
024	C00091598				lower rear support reflex		
025	C00078395			1 x C00076659	radio interference suppressor		
				1 x C00143383			
026	C00054830				drain hose fastener		
027	C00088301				grease box		
028	C00092555				foot 155mm		
029	C00082476				rear foot adjustment assembly		
030	C00092554			1 x C00118842	tray on bottom of tub 60cm		

2210140 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
031	C00054833				top for front support		
032	C00091599			1 x C00119016	front support lower 60cm		
033	C00076656				slide for foot		
034	C00092822				adjustable back foot		
035	C00092820				left rear foot adjustment assembly		
037	C00076387				soundproofing lh		
038	C00092821				rear foot adjustment assembly		
041	C00054932				frame support for tub seal 60cm	n1045047	
042	C00096055				grey cutlery basket assy	n4514h00	
045	C00087980				cutlery basket top		
047	C00094191			1 x C00109840	upper basket roller evo3		
048	C00096052			1 x C00111309	grey set door handle		
049	C00079013				door spring adjuster		
050	C00086602				edge cover right		
050	C00086603				edge cover left		
099	C00036547				anti condensation strip - worktop		

2210220 Exploded views

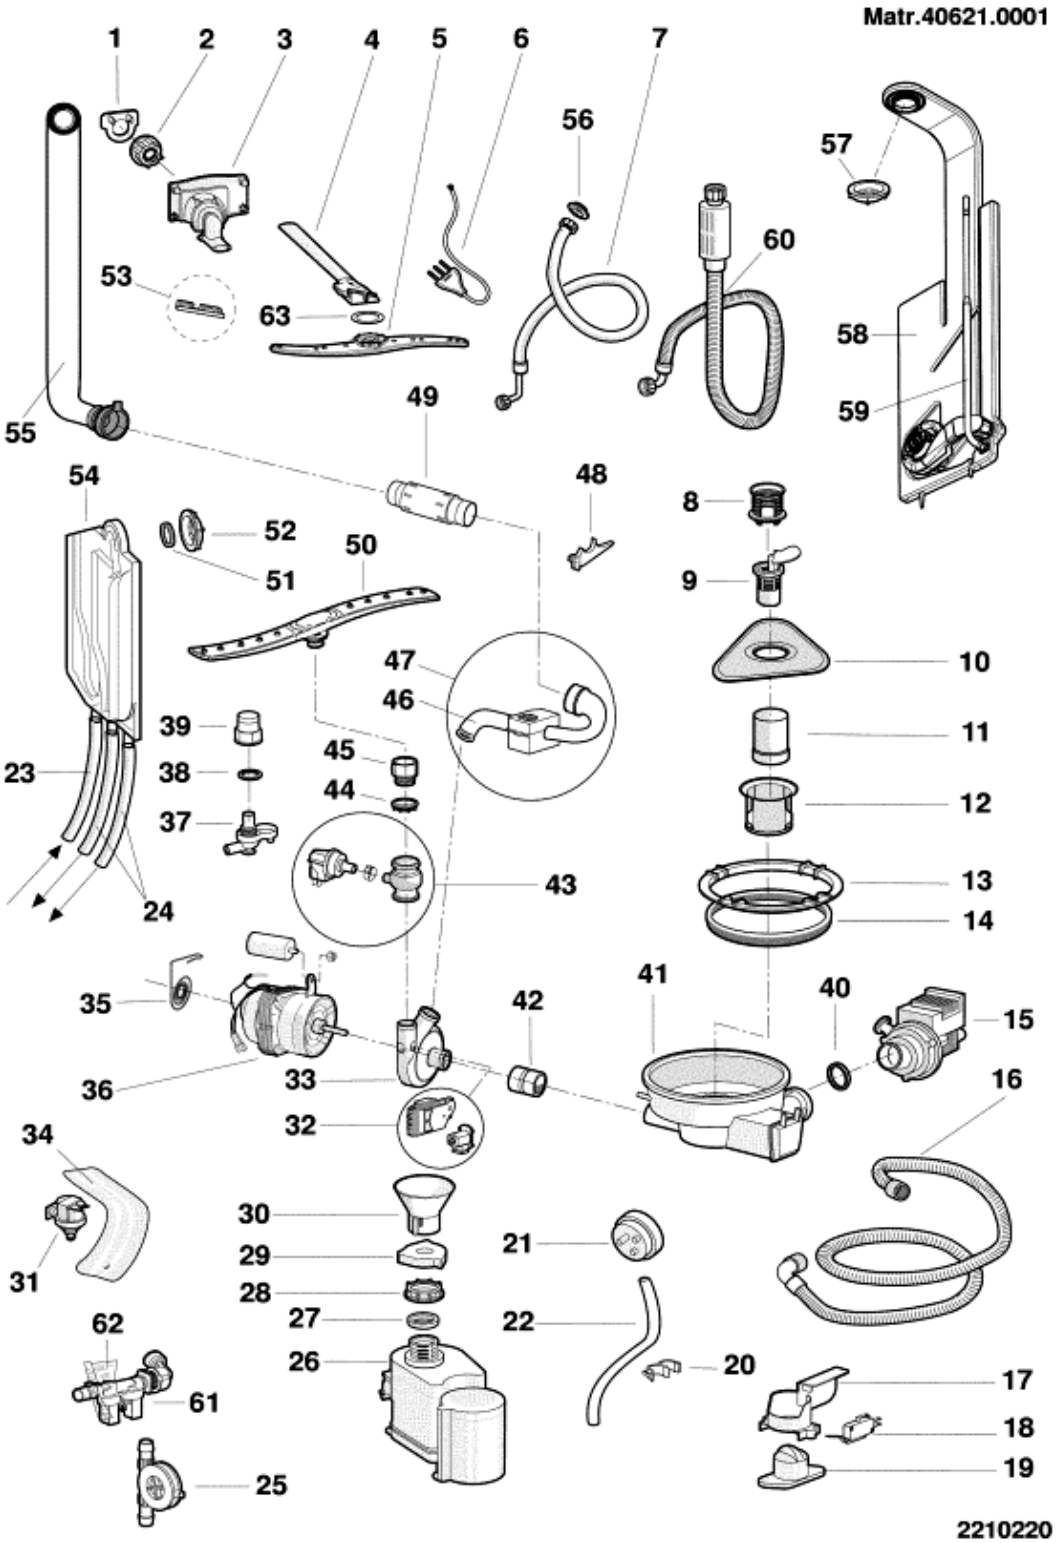


2210220 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
001	C00054925				upper was basket guide casing		
002	C00054862			1 x C00144315	ring-nut fasten.external hose top		
003	C00110526				water supply distribution assembly		
004	C00110527				upper wash arm feed pipe		
005	C00075746				upper wash arm curved set		
006	C00083706			1 x C00143371	supply cable schuko		
				1 x C00144229			
009	C00054863			1 x C00142344	central filter		
010	C00054851			1 x C00145075	outlet filter stainless lvs2000		
011	C00081164			1 x C00142344	filter cylindrical		
012	C00061929				outer fine rotating polyester filter		
013	C00054854				sump fixing ferrule		
014	C00054828				gasket - sump fixing ring		
015	C00112306			1 x C00143739	drain pump 230v 50hz evo3		
016	C00054869				drain hose		
017	C00081162				container - overflow unit		
018	C00037205			1 x C00143107	microswitch		
019	C00058843				float - overflow unit		
020	C00095801				pressure hose clip evo3		
021	C00094151			1 x C00143740	pressure switch 90 71 evo3		
022	C00094154				pipe pressostat lvs evo3		
023	C00110612			1 x C00111855	tube water inlet electrovalve/air-		
				1 x C00115348			
024	C00054868				tube - softener/sump l.(480mm)		
026	C00094171				water softener adjustable evo3		
027	C00103610				seal - softener/wash chamber		
028	C00041090			1 x C00144235	retaining ring - softener		
029	C00041088				salt cap		
030	C00005819				salt funnel		
032	C00077172			1 x C00141156	motor washing alternating		
033	C00088889				pump cover		
035	C00076628				tub spring		
036	C00088896			1 x C00115896	wash motor/pump assy		
037	C00094159		60903...		overflow connector evo3		
037	C00196353	60904...			overflow connector evo3		

2210220 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
038	C00075695				connection gasket overflow		
039	C00143580		60903...		bodytop overflow evo3 rohs		
039	C00196352	60904...		1 x C00094159 1 x C00143580	bodytop overflow evo3 rohs		
040	C00054917				seal 'o'ring (23,81x2,62)		
041	C00094143	41223...		1 x C00141158	set sump evo3	n1045090	
041	C00096409		41222...		set sump x turbo-dry evo3	n1045090	
042	C00079016				pipe rubber sump-pump		
043	C00094157			1 x C00142435 1 x C00144125	high pressure sensor assembly		
044	C00075057			1 x C00075111	cap corner for support washing		
045	C00066643			1 x C00075111	support - lower wash arm bush		
046	C00091568				hose circulating pump to heater		
047	C00091523			1 x C00143577	box sensing troubled kit markii-		
048	C00078394				outlet pump support		
049	C00057684				washing heating element 2000w		
050	C00094182				lower wash arm		
051	C00084600				o ring seal 38 mm		
052	C00054927			1 x C00144335	ring-nut for air-flow body		
054	C00110610			1 x C00115360	air break + turbine evo3	n1045127	
054	C00141308			1 x C00141655	air break + turbine evo3	n1045127	
055	C00094152				external pipe (hidden heating		
057	C00094601		41222...		cap corner for turbo-dry evo3	n1045090	
058	C00096408		41222...		assembly turbo-dry evo3	n1045090	
059	C00096410		41222...		tube turbo-dry/sump 520mm	n1045090	
060	C00083761				inlet hose - includes antioverflow		
061	C00084558			1 x C00143737	load electrovalve		
061	C00087337				collar seal		
062	C00086801				protection electrovalve		
063	C00098769				upper wash arm seal		
099	C00040005			1 x C00033026	grease amblig ta 1 gr.		
099	C00073917				clamp for pump cover		
099	C00075678				clamp for electrovalve evo3		
099	C00077010				clamp washing heating element		
099	C00084479				hose clamp		

221039S1 Exploded views

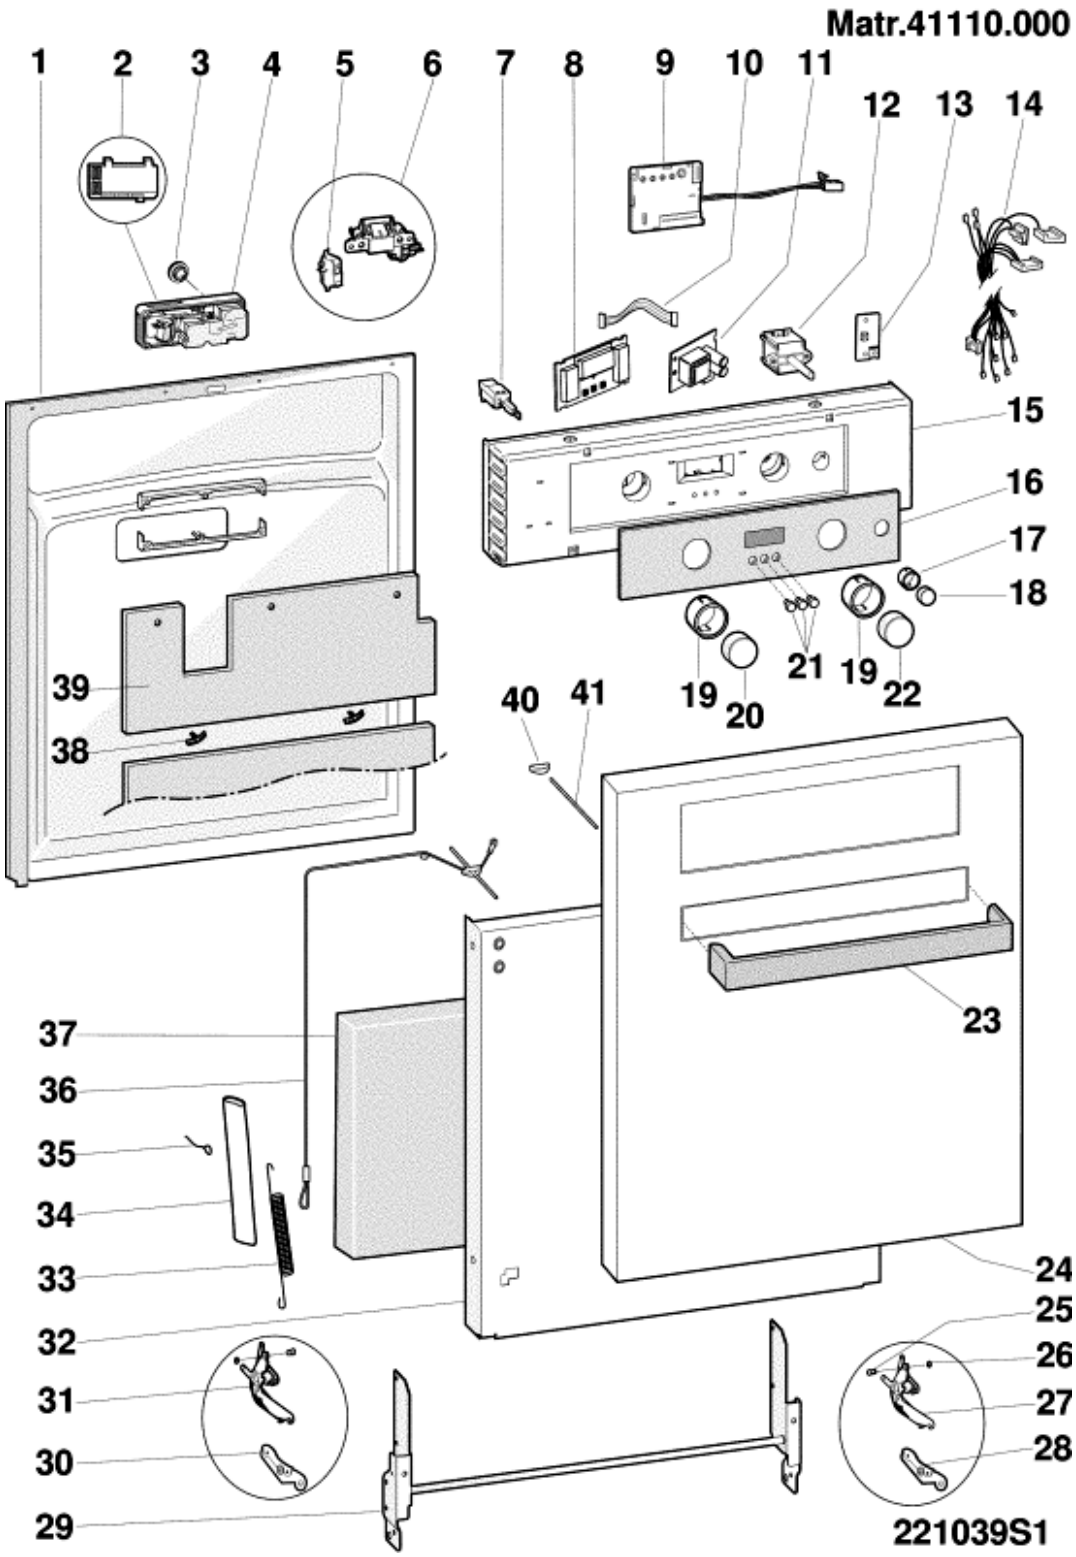

221039S1 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
001	C00091543			1 x C00290247	door seal lower 60cm		
001	C00094695		50315...		inner door panel stainless evo3	n4509a00	37336630000
001	C00108981	50316...		1 x C00290242	inner door panel		37336630100
002	C00098134				door detergent electrodispenser		
003	C00051755				rinse aid cap (pair) raised & flush		
004	C00094133			1 x C00143377	electrodispenser(lamp rinseaid-no		
005	C00085358				microswitch		
006	C00094128			1 x C00195887	locking assembly evo3		
007	C00096884			1 x C00142650	on-off switch (double pole)		
008	C00097965			1 x C00143243	display digit		
009	C00108957				bracket for timer bit 100		
009	C00143217		41222...		timer bit100.1 'f1' rohs +	n1045090	
009	C00143219	41223...		1 x C00262777	timer bit100.1 'f3' rohs +	n1045090	
010	C00097938				2-way wire 'evo3'		
011	C00097964			1 x C00144081	power board display evo3		
012	C00112988			1 x C00143532	7 functions selector		
013	C00097414			1 x C00143541	card start/reset		
014	C00113150		41222...		wiring harness assembly	n1045090	
014	C00115693	41223...			wiring harness assembly	n1045090	
015	C00113146				dashboard grey 'lz700duoix'		
016	C00113132				glass panel 'lz700duoix'		
017	C00113140				key support grey 'lz700duoix'		
018	C00112994				inox push button start-reset		
019	C00113142				knob support grey 'lz700duoix'		
020	C00113149				push button on-off inox		
021	C00113147				display push button - inox		
022	C00112996				inox knob push-push		
023	C00111678			1 x C00142032	door handle inox experience		
024	C00113131			1 x C00259829	door inox tech 'lz700duoix'		
025	C00048504				hinge pin		
026	C00058776				washer d = 6 mm		
027	C00085017				rh hinge		
028	C00085016				hinge cam+lh upper		
029	C00085014				hinge assembly		
030	C00085015				hinge cam+lh upper		

221039S1 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
031	C00085018				lh hinge		
032	C00091586				door zinc		
033	C00086467				door spring		
034	C00066426				tube hinge spring		
036	C00054936				spring adjustment wire		
038	C00087235				spring front panel soundproofing		
039	C00087216				front panel soundproofing 60cm		
040	C00054933				spring adjustment piece		
041	C00055000			1 x C00143736	special screw for spring		
042	C00140679				seal spring	n1045127	
099	C00076108			1 x C00012687	screw canoe klip		
099	C00094120				fixing bolt inner door/dashboard		
099	C00094141				fixing screw inner/outer door		
099	C00111286				transparent door lvs evo3 60cm ##		

Notices

n1045048: BIT 100 CARD INITIALIZATION

Free-standing dishwasher

1- Close the door and switch the dishwasher on.
2- Wait for the test cycle to start (2 LEDs light up or "ROD" appears on dishwashers with display).
3- Wait 10 seconds (dishwasher will start to fill water...)
N.B. If the cycle fails to start the card has probably already initialized, so proceed to point 5.
4- To reset the test cycle turn the programme button to reset or hold down the start/reset button for 5 seconds. (Wait for the buzzer to beep three times or if the dishwasher does not have a buzzer, wait for the programme LEDs to switch off.)
5- To check the aforementioned steps have completed successfully, select a programme and see if it starts; (reset it after this check).
6- The dishwasher is ready for the customer.

Built-in dishwashers

1- Close the door and switch the dishwasher on.
2- Wait for the test cycle to start
3- Wait 10 seconds (the dishwasher will start to fill...)
N.B. If the cycle fails to start the card has probably already initialized, so proceed to point 5.
4- To reset the cycle, open the door (2 LEDs lit up) and press the programme button for three bips of the buzzer (or until the programme LEDs go off for dishwashers with no buzzer).
5- To check the aforementioned steps have completed successfully, press the select programme button and check that the indicator light beside the corresponding programme comes on.
6- The dishwasher is ready for thecustomer.

n1045090: Elimination of Turbo Dry drying system

The Turbo Dry drying system has been eliminated from all dishwashers affected by this bulletin.

ELIMINATED PARTS:
Turbo Dry Assembly P/N 096408
Turbo Dry ring nut P/N 094601

Turbo Dry Hose / Sump P/N 096410
Turbo Dry sump trap assembly P/N 096409

PARTS INTRODUCED:
Sump trap assembly P/N 094143
RH lateral sound insulation P/N 076388

This modification also concerns the timer and wiring; the following list shows the affected models with the relevant modification start serial numbers.

FDW60P (commercial code 33183)
Serial no.: 41011.0001
Wiring: premodification 114457 - new 114458
Bit 100 Timer: premodification 097481(Rohs 143207)‘E2'- new114403 (Rohs 143209) E4'

FDW60T (commercial code 33184)
Serial no.: 41011.0001
Wiring: premodification 114457 - new 114458
Bit 100 Timer: premodification 097481(Rohs 143207) ‘E2' - new 114403(Rohs 143209) ‘E4'

FDW60G (commercial code 33185)
Serial no.: 41011.0001
Wiring: premodification 114457 - new 114458
Bit 100 Timer: premodification 097481(Rohs 143207)‘E2' - new 114403(Rohs 143209) ‘E4'

FDW65A (commercial code 33186)
Serial no.: 41011.0001
Wiring: premodification 114457 - new 114458
Bit 100 Timer: premodification 097481(Rohs 143207)‘E2'- new 114403(Rohs 143209) ‘E4'

FDW20P (commercial code 33182)
Serial no: 41020.0001
Wiring: premodification 114574 - new 112933
Bit 100 Timer: premodification 109875(Rohs 143211)‘S1'-new114767(Rohs144314)‘E5'

LL65XFR (commercial code 29284)
Serial no.: 41102.0001
Wiring: premodification 114457 - new 114458
Bit 100 Timer: premodification 097481(Rohs 143207)‘E2' – new 14403(Rohs143209) ‘E4'

IDL61EU (commercial code 30680)
Serial no.: 41102.0001
Wiring: premodification 114567 - new 112915
Bit 100 Timer: premodification 097481(Rohs 143207) ‘E2' - new 114403(Rohs143209) ‘E4'

IDL61EU.2 (commercial code 32218)
Serial no.: 41102.0001
Wiring: premodification 114567 - new 112915
Bit 100 Timer: premodification 109875(Rohs 143211)‘S1' - new 114403(Rohs143209) ‘E4'

IDL70IT (commercial code 30215)
Serial no.: 41102.0001
Wiring: premodification 114565 - new 112901
Bit 100 Timer: premodification 097481(Rohs 143207)‘E2' - new 114403(Rohs143209) ‘E4'

IDL75EU.2 (commercial code 32627)

Serial no.: 41102.0001
Wiring: premodification 114565 - new 112901
Bit 100 Timer: premodification 097481(Rohs 143207)‘E2' - new 114403(Rohs143209) ‘E4'

IDL75SEU.2 (commercial code 32845)
Serial no.: 41102.0001
Wiring: premodification 114565 - new 112901
Bit 100 Timer: premodification 097481(Rohs 143207)‘E2' - new 114403(Rohs143209) ‘E4'

IDL75EU (commercial code 30661)
Serial no.: 41102.0001
Wiring: premodification 114565 - new 112901
Bit 100 Timer: premodification 097481(Rohs 143207)‘E2' - new 114403(Rohs143209) ‘E4'

IDL75SEU (commercial code 30604)
Serial no.: 41102.0001
Wiring: premodification 114565 - new 112901
Bit 100 Timer: premodification 097481(Rohs 143207)‘E2' - new 114403(Rohs143209) ‘E4'

IDL710FR (commercial code 30017)
Serial no.: 41102.0001
Wiring: premodification 114563m - new 114633
Bit 100 Timer: premodification 097481(Rohs 143207)‘E2' - new 114403(Rohs143209) ‘E4'

LL65FR (commercial code 28462)
Serial no: 41103.0001
Wiring: premodification 114457 - new 114458
Bit 100 Timer: premodification 097481(Rohs 143207)‘E2' - new 114403(Rohs143209) ‘E4'

LVZ680DUOIX (commercial code 33662)
Serial no: 41223.0001
Wiring: premodification 114494 – new 115692
Bit 100 Timer: premodification 111884(Rohs 143217)‘F1’ – new 115691(Rohs 143219) ‘F3’

LZ700DUOIX (commercial code 33663)
Serial no: 41223.0001
Wiring: premodification 113150 – new 115693
Bit 100 Timer: premodification 111884(Rohs 143217)‘F1’ – new 115691(Rohs 143219) ‘F3’

BFI680 (commercial code 30715)
Serial no: 50121.0001
Wiring: premodification 111353 - new 114552
Bit 100 Timer: premodification 097481(Rohs 143207)'E2' - new 115691(Rohs 143219) 'F3'

LI680DUO (commercial code 29514)
Serial no: 50121.0001
Wiring: premodification 111353 - new 114552
Bit 100 Timer: premodification 097481(Rohs 143207)'E2' - new 115691(Rohs 143219) 'F3'

LI700DUO (commercial code 29515)
Serial no: 50121.0001
Wiring: premodification 111353 - new 114552
Bit 100 Timer: premodification 097481(Rohs 143207) 'E2'-new115691(Rohs 143219)'F3'

LIQ700DUOTI (commercial code 33970)
Serial no: 50121.0001
Wiring: premodification 111353 - new 114552

Bit 100 Timer: premodification 097481(Rohs 143207)'E2' -new115691(Rohs 143219)'F3'

LVA12-56AN (commercial code 33610)
Serial no: 50206.0001
Wiring: premodifica 112165 – new 116170
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LVA12-56WH (commercial code 33611)
Serial no: 50206.0001
Wiring: premodifica 112165 – new 116170
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LVI12-66IX (commercial code 29568)
Serial no: 50206.0001
Wiring: premodifica 113039 – new 116172
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LVI12-66MGI (commercial code 29571)
Serial no: 50206.0001
Wiring: premodifica 113039 – new 116172
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LVX12-67IX (commercial code 33950)
Serial no: 50207.0001
Wiring: premodifica 113039 – new 116172
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LVX12-56AN (commercial code 33749)
Serial no: 50207.0001
Wiring: premodifica 112165 – new 116170
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LVX12-56WH (commercial code 33750)
Serial no: 50207.0001
Wiring: premodifica 112165 – new 116170
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LVX12-56IX (commercial code 33748)
Serial no: 50207.0001
Wiring: premodifica 112165 – new 116170
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LVX12-67WH (commercial code 33952)
Serial no: 50207.0001
Wiring: premodifica 113039 – new 116172
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LVX12-67AN (commercial code 33951)
Serial no: 50207.0001
Wiring: premodifica 113039 – new 116172
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LVM12-67BA (commercial code 33953)
Serial no: 50207.0001
Wiring: premodifica 113039 – new 116172
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LVM12-67GI (commercial code 33954)
Serial no: 50207.0001
Wiring: premodifica 113039 – new 116172
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

FDW80T (commercial code 33188)
Serial no: 50207.0001
Wiring: premodifica 114573 – new 116173
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

FDW80P (commercial code 33187)
Serial no: 50208.0001
Wiring: premodifica 114573 – new 116173
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

FDW85A (commercial code 33190)
Serial no: 50208.0001
Wiring: premodifica 114573 – new 116173
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

FDW80G (commercial code 33189)
Serial no: 50208.0001
Wiring: premodifica 114573 – new 116173
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LD87XSK (commercial code 29692)
Serial no: 50214.0001
Wiring: premodifica 114546 – new 116174
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LD87FR (commercial code 29285)
Serial no: 50214.0001
Wiring: premodifica 114551 – new 116173
Bit 100 Timer: premodifica 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

IDE1000UK.2 (commercial code 34121)
Serial no: 50214.0001
Wiring: premodifica 114052 – new 116175
Bit 100 Timer: premodifica 099892(Rohs 143208)‘E3’ – new 114403(Rohs 143209)‘E4’

IDE1005SUK.2 (commercial code 34122)
Serial no: 50214.0001
Wiring: premodifica 114052 – new 116175
Bit 100 Timer: premodifica 099892(Rohs 143208)‘E3’ – new 114403(Rohs 143209)‘E4’

LL6546FR (commercial code 33151)
Serial no: 50214.0001
Wiring: premodifica 112896 – new 116177
Bit 100 Timer: premodifica 111884(Rohs 143217)‘F1’ – new 115691(Rohs 143219)‘F3’

IDE100SK (commercial code 30758)
Serial no: 50216.0001
Wiring: premodifica 114566 – new 116179
Bit 100 Timer: premodifica 099892(Rohs 143208)‘E3’ – new 114403(Rohs 143209)‘E4’

IDE100SIT (commercial code 30216)

Serial no: 50217.0001
Wiring: premodifica 114566 – new 116179
Bit 100 Timer: premodifica 099892(Rohs 143208)‘E3’ – new 114403(Rohs 143209)‘E4’

IDE100EU (commercial code 30666)
Serial no: 50217.0001
Wiring : premodifica 114566 – new 116179
Bit 100 Timer: premodifica 099892(Rohs 143208)‘E3’ – new 114403(Rohs 143209)‘E4’

LVTI12-67 (commercial code 33955)
Serial no: 50218.0001
Wiring: premodifica 111353 – new 114552
Bit 100 Timer: premodifica 097481(Rohs 143207)‘E2’ – new 115691(Rohs 143219) ‘F3’

CISLI700DUO (commercial code 34142)
Serial no: 50224.0001
Wiring: old 111353 – new 114552
Bit 100 Timer: old 097481(Rohs 143207)‘E2’ – new 115691(Rohs 143219)‘F3’

LL68XFR (commercial code 34382)
Serial no: 50225.0001
Wiring: old 112896 – new 116177
Bit 100 Timer: old 111884(Rohs 143217)‘F1’ – new 115691(Rohs 143219)‘F3’

LD87IT (commercial code 28455)
Serial no: 50228.0001
Wiring: old 114546 – new 116174
Bit 100 Timer: old 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LD87XIT (commercial code 28458)
Serial no: 50228.0001
Wiring: old 114546 – new 116174
Bit 100 Timer: old 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LD87XEU (commercial code 28474)
Serial no: 50228.0001
Wiring : old 114546 – new 116174
Bit 100 Timer: old 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LD87EU (cod. comm 28473)
Serial no: 50228.0001
Wiring: old 114546 – new 116174
Bit 100 Timer: old 111886(Rohs 143218)‘F2’ – new 116171(Rohs 143220)‘F4’

LD87XAUS (commercial code 29918)
Serial no: 50228.0001
Wiring: old 114551 – new 116173
Bit 100 Timer: old 111886(Rohs 143220)‘F2’ – new 116171(Rohs 143220)‘F4’

LL68FR (commercial code 34381)
Serial no: 50303.0001
Wiring: old 112896 – new 116177
Bit 100 Timer: old 111884(Rohs 143217)‘F1’ – new 115691(Rohs 143219)‘F3’

LV661AIX (commercial code 33945)
Serial no: 50704.0001

Wiring: old 113064 – new 119244
Bit 100 Timer: old 111886(Rohs 143220)‘F2’ – new 119420(Rohs 143221)‘F5’

LI661A (commercial code 33944)
Serial no: 60413.0001
Wiring: old 113080 – new 112909
Bit 100 Timer: old 099892(Rohs 143208)‘E3’ – new 119420(Rohs 143221)‘F5’

n1045106: Different position of electric distributor.


The position of the electric distributor has been changed as shown in the attached illustration.
The new machines have a new industrial code.

Introduced items:
C00111300 upper rack
C00108981 inside door

Premodification items:
C00096049 upper rack
C00094695 inside door

The following list shows the affected models with the relevant modification start serial numbers.

cc 33663 s/n 50316.0001 LZ700DUOIX

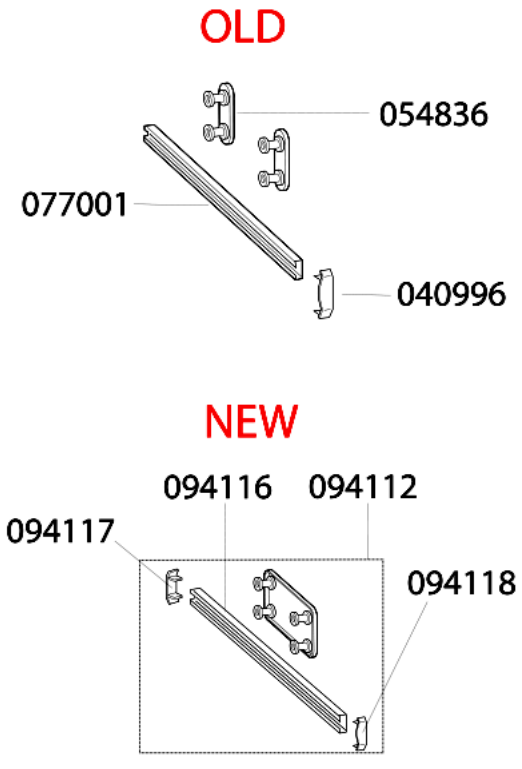

n1045127: New airbreak - solution of water spurts leaking from base LVS 60 CM

From serial number 50930.0001, to solve the problem of water spurts emitted from the lower right and left side of the door the following modifications were introduced in production:

1-Airbreak without insert to allow the necessary pressure venting
2-Honeycomb top panel to protect the kitchen unit from any steam emitted (only on built-under models)
3-Tank seal length increased by 3 cm to improve water tightness
4-Die-cut roof sound-deadening panel
5-Three clips for correct fixing of the tank base seal (in production from serial number 50701.0001)

New parts:
C00141308 - Airbreak
C00141310 - Honeycomb top panel (built-under versions only)
C00141317 - Tank seal
C00141314 - Roof sound-deadening panel
C00140679 - Tank base seal fixing clip

Premodification parts
C00110610 - Airbreak
C00116110 - Tank seal
C00097300 - Roof sound-deadening panel


1) AIRBREAK REPLACEMENT
It is mandatory to use the new part; in the event of replacement with premodification appliances proceed as follows:
- replace the airbreak with the new part C00141308
- if present, refit the roof sound-deadening panel after cutting out a 10x10 cm square from the rear left-hand corner
- on the built-under version, fit honeycomb panel C00141310 on the top of the appliance
- replace tank seal with the new seal P/N C00141317

WARNING: when replacing an airbreak without a litre-counter turbine use exclusively the same type of part (P/N C00094174 - all the relevant details are given in bulletin n1045085)

2) CHANGING THE TANK SEAL
On appliances with serial number from 40101.0001 to 50930.0001, you can use the new tank seal P/N C00141317 after cutting 1.5 cm off each end.

Electric schemes and links

Cod. 16001883600

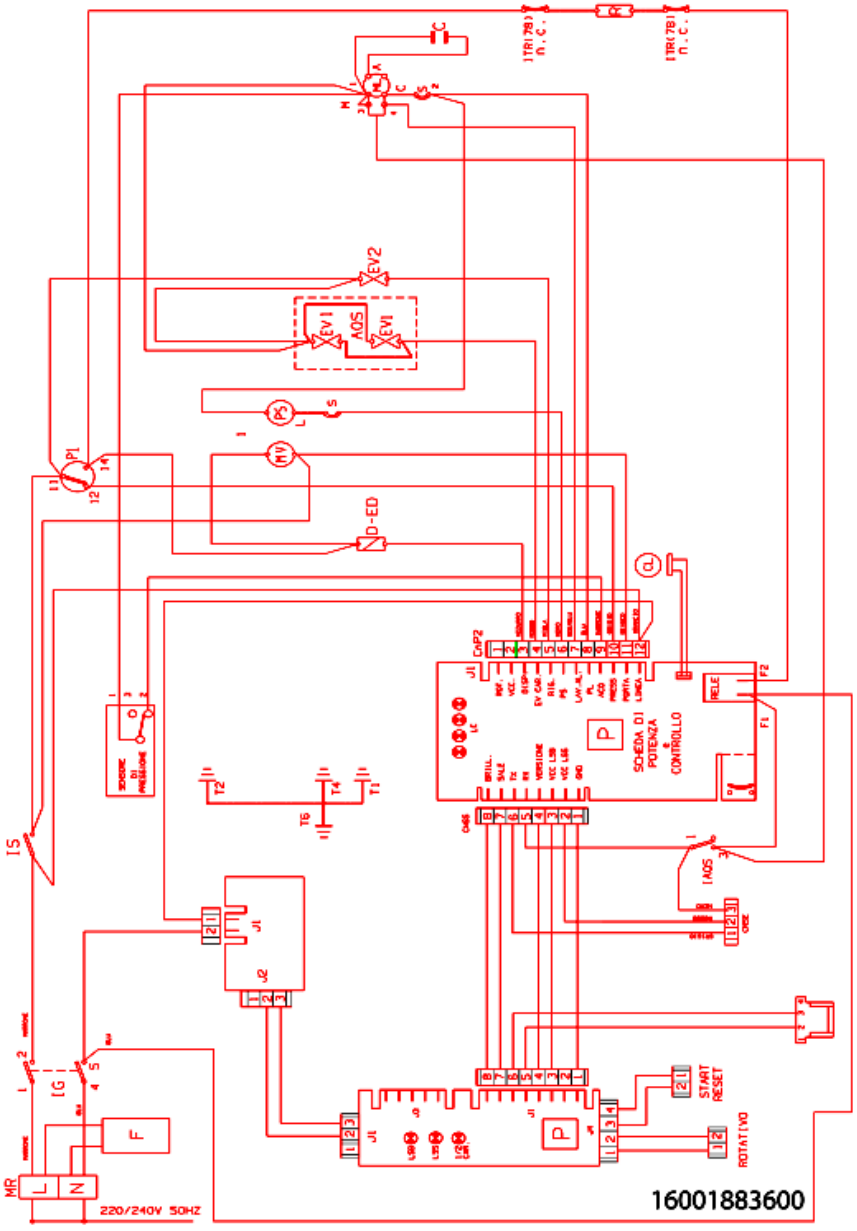

Legend

Legend: 16001883600

A..	Timer contact	LPA	Door open
AQS	Aquastop electrovalve	LPR	Prewash LED
B..	Timer contact	LRI	Rinse LED
C	Condensor	LS	Mains LED -Pilot lampe On/Off
C..	Timer contact	LSB	Polisher LED
CL	Slow cam	LSC	Cycle ranning lamp
CM	Wash pump motor connector	LSE	Acquastop LED
CN	Connector	LSS	Salt LED
CV	Fast cam	LV	Fan off lamp
D-ED	Dispenser - Electric dosing device	M	Terminal box
D..	Timer contact	MB	Polisher dip-switch
DB	Brightener dispenser	ME	Acquastop dip-switch
DD	Display - Detergent dispenser	ML	Wash motor
E1	Cold water electrovalve	MM	Handle dip-switch
E2	Regeneration electrovalve	MP	Door dip-switch
E3	Hot water electrovalve	MR	Delay-timer motor - Terminal board
ECO	Saving switch	MT	Timer motor
ED	Detergent/Brightener dispenser	MTR	Fast forward timer motor
EV1	Cold water electrovalve MM- Handle dip-switch	MV	Motor fan
EV1/2	Half-load electrovalve	P	Pressure switch
EV2	Regeneration electrovalve	P..	Pressure switch contact
EV3	Hot water electrovalve	P1	Stage 1 pressure
EVC	Hot water electrovalve	P2	Stage 2 pressure switch
EVF	Cold water electrovalve	PAP	High pressure switch
EVR	Regeneration water electrovalve	PO	Overflow pressure switch
F	Anti-interference filter ML- Wash motor	PS	Drain pump
FA	Radio interferences	PULS	Push-button panel
I1	On/Off switch - Plus cycle switch -IEC cycle	R	Heating element
I1/2	Switch half-load	R.D.	Delay rotary selector
I2	Fast switch -IEC cycle switch (standard) -	RA	Heating element drying
I2H	2-hour delay switch	ROT D	Delay rotary selector
I3	Saving switch- Switch for cycle with no pre-	ROT.	Rotary selector
I4	Switch for cycle fresh dirty	S	Motor overload cutout

I4H	4-hour delay switch	SC	Selector cycli
I5-ICR	Fast cycle switch	SS	Salt detector
I6	Soak cycle switch	ST	START
I6H	6-hour delay switch	T..	Delay-tymer contact
IAQS	Aquastop switch	T1	Power supply earth cable -Thermostat 45?C
ID	Switch display	T2	Lid earth -Thermostat 55?C
IE	Saving switch	T3	Timer earth -Thermostat 65?C
IEXD	Exstra dray switch	T36	36?C N.O. Thermostat
IG	Main switch	T4	Heating element earth
IMV	Off motor fan switch	T46	46?C N.O. Thermostat
IP	High temperature switch	T5	Drain pump earth
IS	Cut-off switch	T57	57?C N.O. Thermostat
ISB	Polisher led switch	T6	Wash motor earth
ISS	Salt LED switch	T8	External lid earth
ITR	Heating element switch	TE	Relay switch
L	Mains LED	THP	Thermoprotector
L1	Cycle 1 lamp	TM	Timer
L1/2	Lamp cjcle half-load	TS	Safety thermostat
L2	Cycle 2 lamp	TS 40	Thermostat 40 ?C
L3	Cycle 3 lamp	TS 50	Thermostat 50 ?C
L4	Cycle 4 lamp	TS 62	Thermostat 62 ?C
L5	Cycle 5 lamp	TS1	Min. temperature thermostat
L6	Cycle 6 lamp	TS2	Max. temperature thermostat
LA	Drying LED	TT	Terminal box support earth
LAQ	Aquastop on lamp	Tcp	nner-door earthing connection
LC	Cycle ranning lamp	Tfa	Radio interference
LD	Delay activated lamp	Tml	Pump wash motor earthing connection
LE	Saving cycle	Tpg	Large door earthing connection
LH2	2-hour delay lamp	Tpi	Inspection door earthing connection
LH4	4-hour delay lamp	Tpr	Pressure switch
LH6	6-hour delay lamp	Tps	Discharge pump earthing connection
LL	Wash LED	Tr	Heating element
LP	High temperature LED	Tte	Delay-timer earthing connection