
INDESIT company

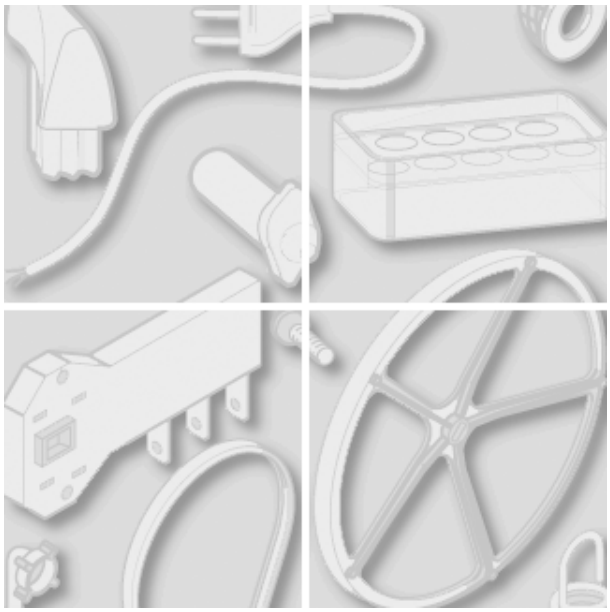

Model type:
WE12SDE

Commercial code:
F027149

General notes

Technical Documentation guidelines

You can find herewith some generic information to simplify cunsulting of technical documentation:

1. Models of same range share the same exploded views, which report the richest set of spare parts:generally, a model does not necessarly have a related spare part for each particular shown on exploded views.

2. Some spare parts can not be represented directly on the exploded views (instruction booklets, specific kit, etc...). You can find those codes in the spare parts list with the same reference of particular where spares are installed or with references 099, 999. Instruction booklets, once managed, appear with 000 reference.

3. On the higher right site of each exploded view there is a serial number which indicates the beginning of the production of certain range:some models might have more than an exploded view for a given category, each distinguished by a different serial no.and linked to another spare parts list, In this case, serial no. is required to supply the right spare part code. Exploded view to be considered is the one with a more recent serial no. but previous than the one of the model that needs assistance.

4.Exploded views might require further updates even after publishing. Addition of new spares will go on following the already existing numeration references. Revision number of an exploded view is shown into last four digits of serial number into upper right hand corner.

5.The spare parts list associated to an exploded view shows related codes of spares managed for a certain model; for each spare part other informations are available:


REF: reference no of spare into a table; SUBSTITUTE: list of spare(s) which can replace a code but that keeps same functional characteristics

INDUSTRIAL CODE: list of variables of a model (shown into model label) where such spare is used; NOTICE: code of information(s) to refer to complete technical intervention, track for changes or to find correct spare part code.

6. Some notices, into a same section are generic therefore cannot be directly linked to a spare part. In order to assist a model in the best way as possible, it is helpful to pay attention to all notices and constantly verify documentation updates

7.Technical documentation cover shows model name and its commercial codes

1180120 Exploded views

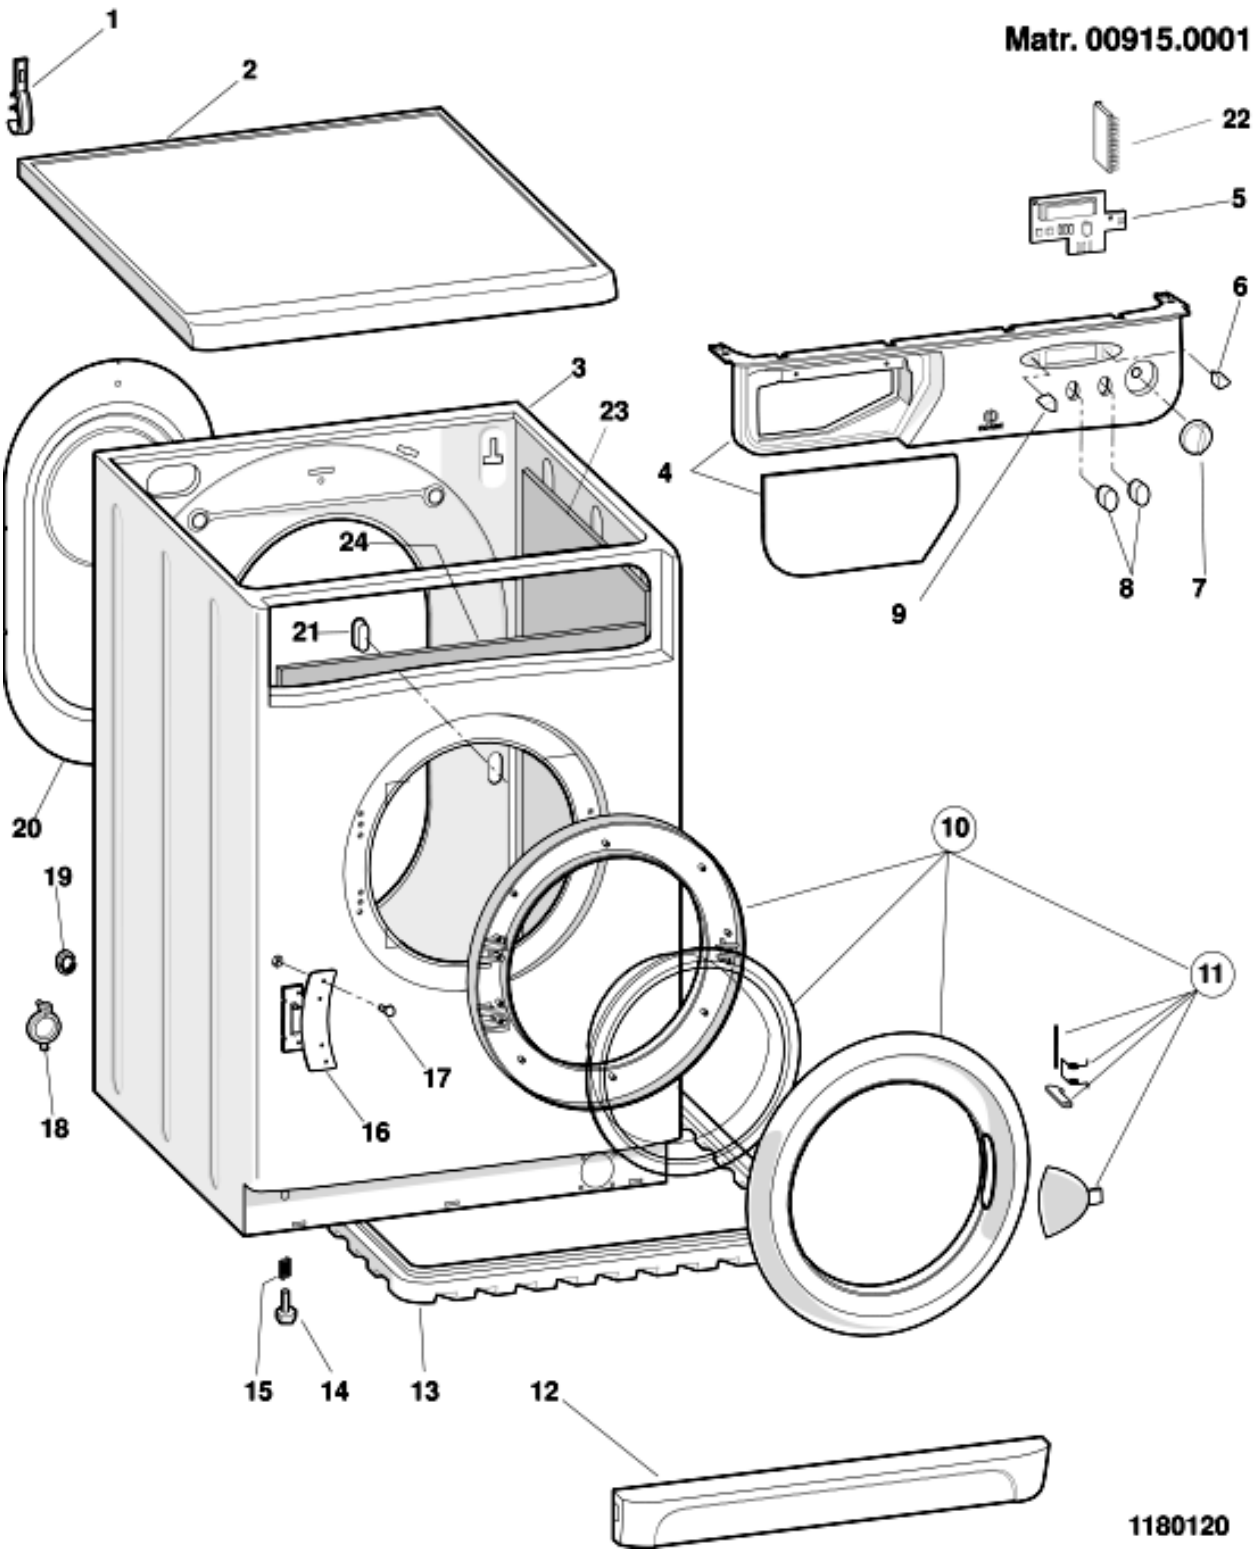


1180120 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
000	C00086514				user instructions booklet d		
001	C00046667				wiring stop	n1040282	80271490000
001	C00064550				drain hose holder		
001	C00091904				cable clamp hose		80271490030
002	C00077027				grey top silver fiat 647		
003	C00077022			1 x C00090575	cabinet grey silver fiat 647	n1040230 n1040276	
003	C00090575				cabinet grey silver fiat 647		
004	C00086513				control panel & handle		
005	C00084330			1 x C00084759	display card sw 1.20 amp (less	n1040236	
005	C00084759				display card sw 1,77 (less	n1040252	
005	C00088762			1 x C00084759	display card evm12 de not	n1040273	
006	C00078961				pushbutton grey display right		
007	C00077026				knob grey silver fiat 647		
008	C00078960				grey pushbutton		
009	C00078962				pushbutton grey display left		
010	C00077029				door assy grey/silver		
011	C00076583				door handle kit		
012	C00077021				base grey silver fiat 647		
014	C00050320			1 x C00084810 1 x C00110512	foot - rear m 8 h = 41 mm		
015	C00059869				spring for foot d =11 mm h = 21		
016	C00075325			2 x C00096210 1 x C00255430	hinge door 3.5 mm indesit		
017	C00002497				nut m4x3,2x7		
017	C00019846				civata t 1/2 t m4x12		
017	C00065185				bolt m4,5 x 8		
018	C00046666				collar for drain hose		
019	C00003144				blanking plug 11mm		
019	C00065871				blanking plug		
020	C00077363				rear cover - silver fiat 647		
021	C00064899				blanking plate-rear(test plug)	n1040208	
021	C00084817				blanking plate-rear(test plug)		
022	C00086512				eeprom display we12sde		
099	C00066091			1 x C00077411	washer packing		

1180120 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
099	C00066269			1 x C00077411	bolt a/mas m6 x100 zc sp packing		
099	C00074922			1 x C00077411	spacer l= 79.5		
099	C00077411				transit bolts kit (1 screw + 1		

1180210 Exploded views

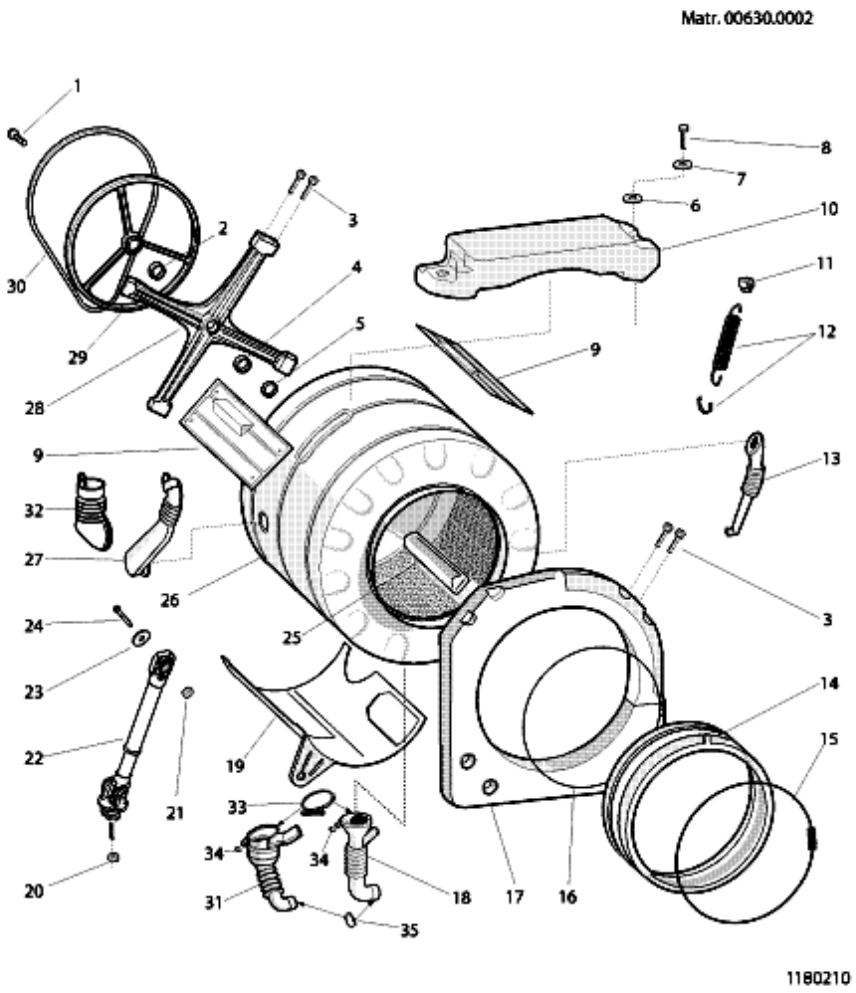


1180210 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
001	C00064786			1 x C00143260	bolt m8x23 torx tefl		
002	C00013563				bearing fits light/heavy spider 25		
003	C00051737				torx m8 x 27 dri-loc screw		
003	C00064785			1 x C00193879	bolt m8x22 tb6lt		
004	C00044765				bearing	n1040371	
005	C00044764			1 x C00082696	standard oil seal 1100/1200 rpm	n1040371	
006	C00075326				washer m8.5x35x3		
007	C00055018				washer m8		
008	C00014342				bolt m8x75 te		
008	C00088408				bolt + washer		
009	C00064517				tank cradle channel-top left right		
010	C00064548				upper counterweight 11 kg		
011	C00064515				anchorage pad - suspension		
012	C00064502				suspension spring - tank		
013	C00086430				detergent recovery hose attached		
014	C00064545				door seal(no deterg recov hose)	n1040282 n1040291	
014	C00093345				door seal (hl)	n1040282	
015	C00064546				clamping ring - door seal front		
016	C00064547				bellows clamp (tank front)		
016	C00092155				door seal- rear retainer		
017	C00064516			1 x C00092178	front counterweight		
017	C00092178				front counterweight		
018	C00064531				hose tank to filter	n1040282	80271490000
019	C00064518			1 x C00093848	cradle outer- set	n1040286	
019	C00093848				cradle outer- set	n1040325	
020	C00065152				nut romob m6x22x1,5		
021	C00030443			1 x C00047136 1 x C00144571	nut romob m8		
021	C00030680			1 x C00040130	nut m 10	n1040286	
022	C00086515				shock absorber 80 n (11105)	n1040286	
022	C00303582				kit shock absorber 80 n 8.15 mm		80271490030
024	C00030446				bolt m10 x 45 zntr	n1040286	
024	C00093750				bolt zink m8x40		
025	C00064789			1 x C00268109	lifter - extractable		

1180210 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
026	C00074217			1 x C00093772	outer tank & inner drum assy	n1040256	80271490000
				1 x C00094278		n1040282	
						n1040291	
026	C00092257			1 x C00093772	outer tank & inner drum assy b5	n1040300	80271490030
				1 x C00094278		n1040371	
027	C00064528				hose dispenser to tank	n1040282	80271490000
028	C00074213				bearing spider assembly	n1040300	
						n1040371	
029	C00074211				drum pulley d=210 mm h=20 mm		
030	C00074218				belt (1046-1051mm h8)		
031	C00092174				hose tank to filter with oko ball		80271490030
032	C00092161				hose dispenser to tank		80271490030
033	C00091148			1 x C00094908	clamp d=79 mm		
035	C00092411			1 x C00094908	hose clamp		
099	C00033026			1 x C00292523	ambljgon grease ta 100 gr.		

1180310 Exploded views

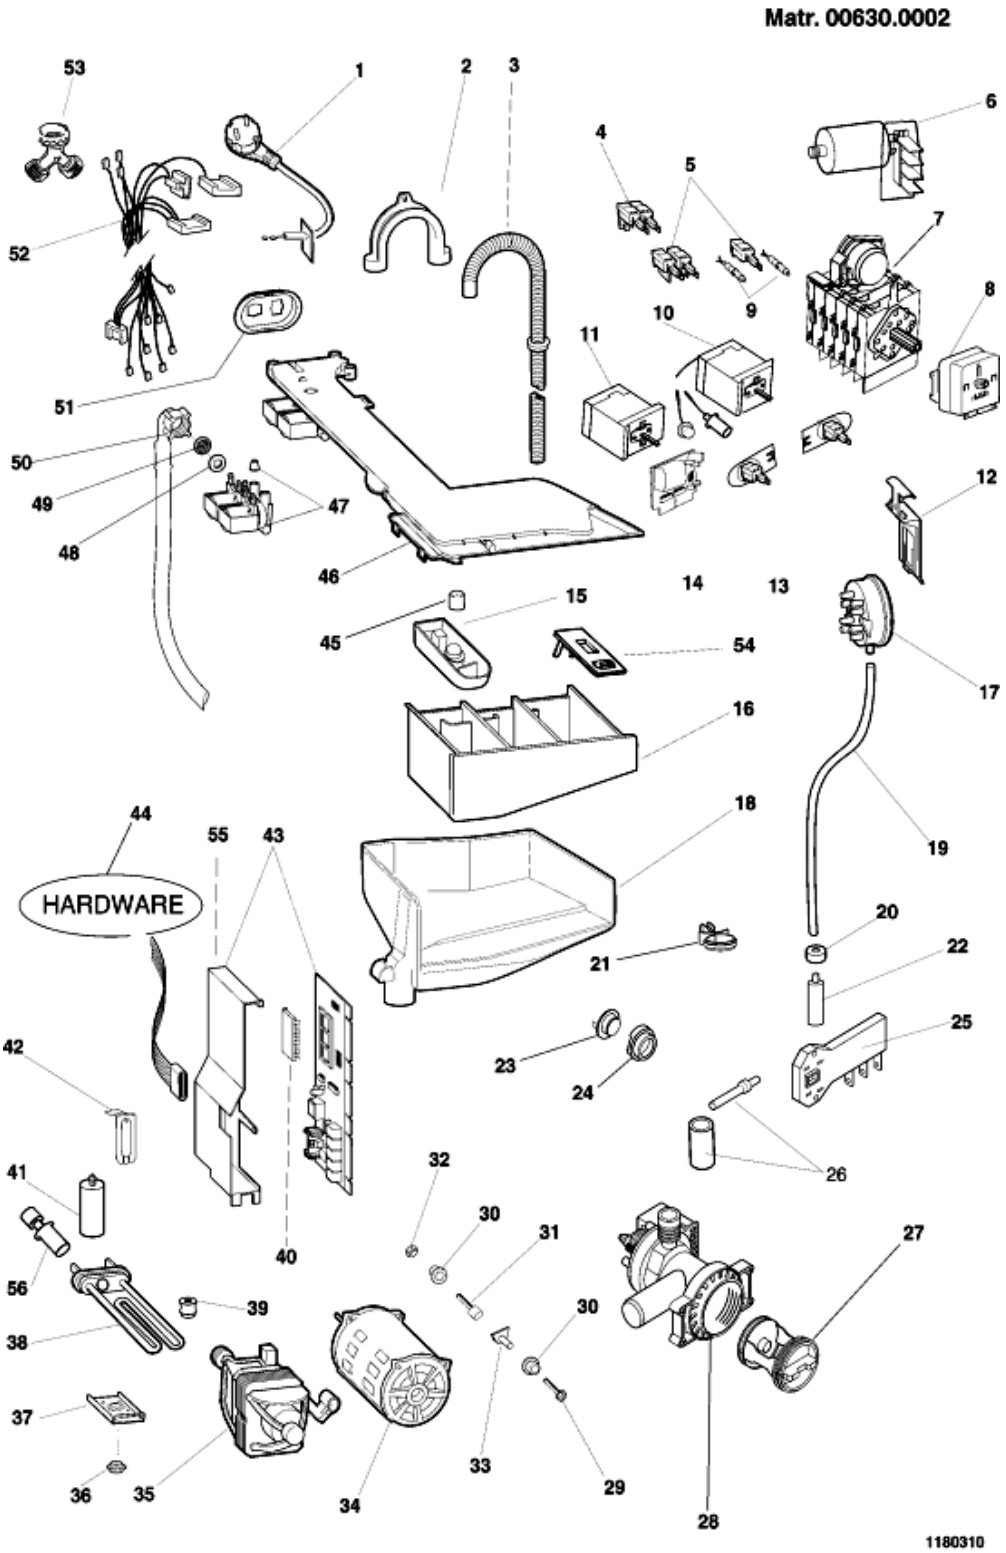

1180310 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
001	C00064563				supply cable 3x1 schuko 1,5 m	n1040276	
001	C00091633				supply cable 3x1 schuko		
002	C00019902				plastic -u- to make drain hose		
003	C00027466				drain hose - to sink l=1860mm		
005	C00058465				on-off switch (double pole)		
005	C00063971				on-off switch		
005	C00076577				push button switch na start/reset		
006	C00064559				radio interference suppressor		
012	C00064537			1 x C00263210	support - pressure switch		
013	C00076707				potentiometer 16 pos.		
015	C00075459				additive container		
016	C00075352			1 x C00097732	soap dispenser drawer		
017	C00064558				pressure switch 1 l. +	n1040229	80271490000
017	C00086660				pressure switch 1 level 93-68 +	n1040282	80271490000
017	C00092151			1 x C00110332	pressure switch 1 l.78-50	n1040299	80271490030
018	C00075351			1 x C00097732 1 x C00097835	dispenser body	n1040282	80271490000
018	C00092314				dispenser body		80271490030
019	C00041785			1 x C00144077	air trap hose 540 mm.	n1040282	80271490000
019	C00092170			1 x C00041785	pipe pressostat l= 470mm. evo ii		80271490030
020	C00019755				anti-vibration bush (foam)		
021	C00064530				clip-pressure switch tube		
022	C00064532			1 x C00092173	air trap	n1040282	80271490000
022	C00092173				air trap x oko		80271490030
024	C00014917				grommet - thermostat		
024	C00020181				blank grommet - thermostat		
025	C00065185				bolt m4,5 x 8		
025	C00066291			1 x C00059539	door interlock		
025	C00085194				door interlock		
027	C00045023				filter handle		
027	C00045025				filter seal		
027	C00045027				pump filter kit		
028	C00064950				self cleaning pump 240v./50hz.	n1040282	80271490000
028	C00076510			1 x C00092264	self cleaning pump 240v./50hz.		80271490030
029	C00074152				bolt m6x30		

1180310 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
029	C00084029				bolt motor m6x34		
032	C00002407				washer 6,4x13x1,5		
032	C00040932				self locking nut m6		
035	C00043430			1 x C00097257	tacho generator black for ice		
035	C00047317			1 x C00196539	brush for motor		
035	C00074221				motor (hl)	n1040258	
038	C00081654			1 x C00086661	heating element for probe 1700w	n1040229	
038	C00086661				heating element for probe 1700w		
039	C00058523				pillar retainer-heating element		
040	C00086511			1 x C00092702	eeprom we12sde 80271490000	n1040282	80271490000
040	C00092702				eeprom we12sde software		80271490030
043	C00084331			1 x C00093153	module (less eeprom) sw 2.01	n1040229 n1040252 n1040273	
043	C00088873			1 x C00084331	module (less eeprom)		
043	C00089404			1 x C00093711	module (less eeprom) idc ew-ar-		
044	C00066055			1 x C00077454	housing seriale		
044	C00066292				insulated tweezers		
044	C00084943			1 x C00099862	serial cable lb2000 - pc	n1040211 n1040317	
045	C00046157				stopper detergent container		
046	C00075458				hopper cover 1 ev		
047	C00064534				seal - dispenser to valve		
047	C00066518				solenoid valve 2 way		
048	C00005572				sealing washer-mains inlet hose		
049	C00005781				inlet hose filter		
050	C00003070				mains inlet hose cold 25c 10bar		
051	C00064946				electrovalve support 1 ev		
052	C00084590				wiring		
052	C00090790				wiring	n1040229 n1040276	
054	C00047069			1 x C00097834	additive cover		
056	C00081653				complete probe heating element	n1040229	
056	C00083915				thermistor ntc		
057	C00092411			1 x C00094908	hose clamp		

1180310 Spare parts list

Ref.	Code	From	To S/N	Substitute	Description	Notice	Industrial
058	C00008612				tube clamp 34,6-36,4		

Notices

n1040066: LB2000 Hardware (Serial hardware key and Pliers)

As of 05.04.2000, the following Spare Parts are available from the Warehouse:

Part no.066055 - Serial hardware key for LVB2000 autotest. It has not to be linked to PC. (substituted with 077454);
Part no. 077454 - Serial hardware key for LVB2000-PC White (substituted with 084566);
Part no. 084566 - Serial hardware key for LB2000/EVOI -PC BIANCA (substituted with 095669 LB2000/EVOI, EVOII - PC).

Part no.066292 - Extractor pliers for integrated circuits.

For instructions on use, please refer to the relative Service Manual.

n1040208: New hardware testing plug LB2000 Teverola.

From the registration number 10827.0001 on all washing machines LB2000 with program selector, produced in the factory in Teverola, a new hardware testing plug cod. 084817 is used.
The new plug is not interchangeable with the pre-modified one cod. 064899; so both have to be managed. In case of substitution of the piece of furniture on am equipment, preceding the registration number 10827.0001, it will be necessary to put on the suitable plug.
This modification of the registration number 10820.0001 is extended to all washing machines and wash-driers with a programs' selector produced in the factory in Comunanza.

n1040211: Serial cable to connect the hardware key with the PC.

To connect the hardware key: LB2000 with the personal computer,you must use
a serial cable, pin to pin 9 pin F/F, to garantee the availability, it was
decided to manage it as a spare part.

The SAT code of the cable (length 2m) is 084943.

n1040229: Items with IDC connectors.

From November 2001, in order to improve electrical connections on models produced in Teverola and Comunanza plants, electrical components supplied with IDC connectors have been applied.

New particulars are:
Code 083916 = PROGRAMME SELECT ELBI 1665 RAST.2 8 POS.
Code 085195 = POTENTIOMETER 8 POS. IDC;
Code 083915 = TEMPERATURE SENSOR NTC ELTH;
Code 087823 = CONDUCIBILITY CONTROL CARD IDC;
Code 085194 = DOOR INTERLOCK IDC;
Code 080662 = PUSH BUTTON SWITCH NA ON OFF;
Code 088394 = PUSH BUTTON SWITCH S.CM NA IDC;
Code 086660 = PRESSURE SENSOR 1LEVEL 93 - 68 + ANTI-SPILL;
Code 088393 = PRESSURE SENSOR 1 LEVEL 90 - 65 + ANTISPILL;
Code 087187 = PRESSURE SENSOR 1 LEVELS + ANTI-SPILL;
Code 085193 = PRESSURE SENSOR 1 LEVELS + ANTI-SPILL;
Code 084763 = RED WARNING LIGHT 12 V INDESIT;
Code 086663 = RED WARNING LIGHT 12 V RAST2 ARISTON
Code 087188 = HEATING ELEM.TERMAL CUT-OUT 1700W/230V L= 169,5 mm ;
Code 086661 = HEATING ELEMENT FOR PROBE 1700W 230V L= 212.5 mm;
Code 089416 = MODULE (LESS EEPROM) WM-WD > 1200 RPM.IDC ;
Code 089074 = MODULE (LESS EEPROM) SW 2.22 YELLOW >1200 IDC;
Code 089404 = MODULE (LESS EEPROM) IDC EW-AR-IN<1200.
Code 084838 = MODULE (LESS EEPROM) MODULE UNIV. STRIP SW 220 IDC.

Wires with IDC connectors can be found directly on spare parts list of models to be repared.

This change has not affected EEPROM which remain the same.

To find the right particular to use:

1 – Find the modified particular into spare parts list of model of interest

2 – Check list of models herebelow given and compare with their serial no.

Models related to Comunanza and Teverola plants in alphabetical order.
Models of Communanza factory. by
A1124UK (23572) Matr. 11209.0001;
A1234UK (22573) Matr. 11217.0001;
A1435SUK (23575) Matr.20502.0001;
A1435UK (23574) Matr.20502.0001;
A1535UK (28069) Matr.20502.0001;
A1635UK (27051) Matr.20502.0001;
AA1000BFR (25700) Matr.11209.0001;
AAX106LFR (25698) Matr. 20121.0001;
AAX116LFR (25591) Matr.20121.0001;
AAX126LFR (25699) Matr. 20121.0001;
AAX149LFR (26286) Matr.20502.0001;
AB104XTK (22504) Matr. 11217.0001;
AB108XEO (26389) Matr.11209.0001;

AB108XIT (22443) Matr. 11203.0001;
AB63XGR (24894) Matr. 11217.0001;
AB65XEO (24492) Matr. 11209.0001;
AB66XIT (26972) Matr. 20121.0001;
AB84XTK (22504) Matr. 11217.0001;
AB88DAG (26561) Matr.20527.0001;
AB88DEX (24898) Matr.20527.0001;
AB88XEO (26388) Matr. 11217.0001;
AB88XEX (23861) Matr. 11217.0001;
AB88XIT (22444) Matr. 11209.0001;
AC106BFR (25817) Matr.20527.0001;
AC120LIT (26836) Matr.20527.0001;
AC128LFR (25818) Matr.20527.0001;
AC80LIT (26835) Matr.20527.0001;
AC96BFR (25816) Matr.20527.0001;
AD1000EX (27764) Matr. 20610.001;
AD1200IT (26694) Matr. 20610.001;
AD1200TK (27199) Matr. 20610.001;
AD1600FR (27157) Matr. 20610.001;
AD1600IT (26834) Matr. 20610.001;
AD1600ITPXU (27163) Matr. 20610.001;
AL107XFR (23684) Matr. 20121.0001;
AL108DAG (24900) Matr.20527.0001 ;
AL108DEX (24901) Matr.20527.0001;
AL108DK60 HZ (24905) Matr.20527.0001
AL108XBE (23648) Matr. 11203.0001;
AL108XSTK (22698) Matr.20121.0001;
AL108XTK (22506) Matr.20121.0001;
AL109SLFR (22495) Matr.20121.0001;
AL109XAUS (26024) Matr. 11217.0001;
AL109XEU (22514) Matr. 11203.0001;
AL109XEX (24734) Matr. 11203.0001;
AL109XIT (22360) Matr. 20121.0001;
AL109XSK (25855) Matr. 11203.0001;
AL118DTK (24902) Matr.20527.0001;
AL128DAUS (24904) Matr.20527.0001;
AL128DEX (24903) Matr.20527.0001;
AL128DSAUS (25742) Matr.20527.0001;
AL128XBE (23656) Matr. 20121.0001;
AL129SLBE (23990) Matr.20121.0001;
AL129XAUS (23864) Matr. 11217.0001;
AL129XEU (22515) Matr. 11202.0001;
AL129XSK (25856) Matr. 11202.0001;
AL129XTK (22507) Matr.20121.0001;
AL12SUK (24363) Matr. 11209.0001;
AL12UK (23576) Matr. 11209.0001;
AL149XEX (22516) Matr.20502.0001;
AL149XSK (25857) Matr.20502.0001;
AL14UK (23577) Matr.20502.0001;
AL169XAUS (26458) Matr.20502.0001;
AL169XEU (24897) Matr.20502.0001;
AL67HCGR (23885) Matr.11210.0001;
AL68XEX (23863) Matr. 11211.0001;
AL68XIT (22363) Matr. 11126.0001;
AL68XPT (22485) Matr. 11217.0001;
AL68XSPT (22977) Matr. 11217.0001;
AL88DEX (24899) Matr.20527.0001;

AL88XEU (22512) Matr. 11204.0001;
AL88XPT (22482) Matr. 20121.0001;
AL88XSPT (22483) Matr.20121.0001;
AL89XIT (22362) Matr. 20121.0001;
AL89XSEX (24735) Matr. 11203.0001;
AL89XSIT (22445) Matr. 20121.0001;
AL98XSPT (27630) Matr.20121.0001;
ALD10UK (26092) Matr.20527.0001;
ALD12SUK (26094) Matr.20527.0001;
ALD12UK(26093) Matr.20527.0001;
ALS104XFR (22501) Matr. 20114.0001;
ALS109XEO (26392) Matr. 11217.0001;
ALS109XEU (22520) Matr. 11219.0001;
ALS109XIT (22470) Matr. 20114.0001;
ALS129XEU (22521) Matr. 20114.0001;
ALS68XIT (22473) Matr. 11217.0001;
ALS88XEO (26391) Matr. 20108.0001;
ALS88XEU (22519) Matr. 20108.0001;
ALS89XIT (22472) Matr. 20114.0001;
ALS89XSIT (22471) Matr. 20114.0001;
AWD10UK (26095) Matr.20527.0001;
AWD12SUK (26097) Matr.20527.0001;
AWD12UK (26096) Matr.20527.0001;
CDE12X (27226) Matr. 20610.001;
CDE12XUK (27227) Matr. 20610.001;
LBE12X (26961) Matr. 20610.001;
LBE12XUK (27155) Matr. 20610.001;
LBE6X (26968) Matr. 20610.001;
LBE8X (26969) Matr. 20722.0001;
SGE12XUK (27241) Matr. 20610.001;
W104TXSBE (25827) Matr. 20128.0001;
W104TXSTK (24746) Matr. 20121.0001;
W104TXTK (23411) Matr. 20121.000;1
W105TXEX (234403) Matr. 20128.0001;
W105XDE (24835) Matr. 20114.0001;
W106XDE (24836) Matr. 20114.0001;
W108XIT (24820) Matr. 20128.0001;
W108XSP (23405) Matr. 20128.0001;
W1215XSDE (24839) Matr. 20114.0001;
W123SUK (23413) Matr. 20121.0001;
W123UK (23369) Matr. 20121.0001;
W123XNL (23416) Matr. 20121.0001;
W124XDE (24837) Matr. 20121.0001;
W124XNL (23418) Matr. 20114.0001;
W125TXEX (23378) Matr. 20128.0001;
W125XDE (24838) Matr. 20114.0001;
W125XSDE (24839) Matr. 20114.0001;
W125XFR (24435) Matr. 20128.0001;
W126XDE (24840) Matr. 20114.0001;
W128XSP (24428) Matr. 20128.0001;
W133UK (24026) Matr. 20121.0001;
W133SUK (24518) Matr. 20121.0001;
W143SUK (27059) Matr.20502.0001;
W143UK (27530) Matr.20502.0001;
W143XNL (23170) Matr.20502.0001;
W144XDE (24841) Matr.20520.0001;
W144XNL (23419) Matr.20502.0001;

W144XSNL (24743) Matr.20502.0001;
W145TXEX (23379) Matr.20521.0001;
W145XDE (24842) Matr.20520.0001;
W146XDE (23843) Matr.20520.0001;
W146XSDE (26461) Matr.20520.0001;
W165TXEX (24796) Matr.20502.0001;
W165XNL (24764) Matr.20502.0001;
W166XDE (26464) Matr.20520.0001;
W682XSIT (24813) Matr. 20114.0001;
W683XGIT 24812) Matr. 20114.0001;
W68XIT (24408) Matr. 20114.0001;
W68XSIT (24409) Matr. 20114.0001;
W842XSIT (24818) Matr. 20128.0001;
W843XGIT (24820) Matr. 20128.0001;
W84TXEX (23401) Matr. 20114.0001;
W84TXTK (23410) Matr. 20121.0001;
W84XSP (23409) Matr. 20114.0001;
W84XSP (24469) Matr. 20114.0001;
W857XSPT (26661) Matr. 20128.0001;
W857XSPT (26661) Matr. 20128.0001;
W88XIT (23395) Matr. 20128.0001;
WA10XIT (26883) Matr. 20128.0001;
WA6XIT (26881) Matr. 20114.0001;
WA8XIT (26882) Matr. 20128.0001;
WA8XSIT (26919) Matr. 20128.0001;
WAS6XIT (27052) Matr. 20204.0001;
WAS8XIT (27053) Matr. 20205.0001;
WD104TEX (24908) Matr. 20603.001;
WD105TEX (24909) Matr. 20603.001;
WD105TEX220-60 (27603) Matr. 20603.001;
WD106FR (25691) Matr. 20603.001;
WD10UK (25056) Matr. 20603.001;
WD118SP (26335) Matr. 20603.001;
WD11UK (25058) Matr. 20604.001;
WD125TEX (24910) Matr. 20604.001;
WD125TSEX (27152) Matr. 20604.001;
WD12SUK (25538) Matr. 20604.001;
WD12UK (25057) Matr. 20604.001;
WD12XUK (27233) Matr. 20610.001;
WD84EX (24906) Matr. 20603.001;
WD84TEX (24907) Matr. 20603.001;
WDE12X (27232) Matr. 20610.001;
WE105XR (26953) Matr. 20603.0001;
WE10UK (24459) Matr. 20603.0001;
WE11UK (24460) Matr. 20603.0001;
WE125XEX (24789) Matr. 20603.0001;
WE12SDE (27149) Matr. 20610.001;
WE12SUK (24462) Matr. 20603.0001;
WE12SUK (27154) Matr. 20610.001;
WE12UK (24461) Matr. 20603.0001;
WE12XNL (24762) Matr. 20603.0001;
WE13UK (24463) Matr. 20603.0001;
WE145XEX (24792) Matr. 20610.001;
WE14DE (27080) Matr. 20610.001;
WE14SDE (27150) Matr. 20610.001;
WE14SUK (27153) Matr. 20610.001;
WE14UK (24464) Matr. 20610.001;


WE14XNL (24763) Matr. 20610.001;
WE14XSNL(27752) Matr. 20610.001;
WE16DE (27151) Matr. 20610.001;
WE16UK (25162) Matr. 20610.001;
WE16XNL (27765) Matr. 20610.001;
WE8XR (26952) Matr. 20603.0001;
WES9XR (26892) Matr. 20603.001;
WH96TXE (25376) Matr. 20128.0001;
WS105TXEX (23356) Matr. 20205.0001;
WS682XSIT (24826) Matr. 20204.0001;
WS683XGIT (24822) Matr. 20204.0001;
WS84TXEX (23355) Matr. 20204.0001;
WS88XIT (23349) Matr. 20205.0001;

Models of Teverola factory.
AB103TK (27113) Matr. 20408.0001
AB104IT (27913) Matr. 20408.0001;
AB107PT (27094) Matr. 20408.0001;
AB63EX (23909) Matr. 20408.0001;
AB83TK (22503) Matr. 20408.0001;
AB84IT (27914) Matr. 20408.0001;
AB84PT (22484) Matr. 20408.0001;
AB95AUS (23879) Matr. 20408.0001;
AB95EU (23781) Matr. 20408.0001;
AL102PFR (27299) Matr. 20408.0001;
AL109K (23910) Matr. 20408.0001;
AL10UK (23590) Matr. 20408.0001;
AL65PT (27093) Matr. 20408.0001;
LNA855FR (27595) Matr. 20325.0001;
W103NL (24600) Matr. 20314.0001;
W103TTK (23337) Matr. 20408.0001;
W103UK (23334) Matr. 20408.0001;
W104DE (24834) Matr. 20408.0001;
W104FR (23340) Matr. 20408.0001;
W104NL (23386) Matr. 20408.0001;
W104SP (24415) Matr. 20325.0001;
W104TBE (25474) Matr. 20408.0001;
W104TEX (23332) Matr. 20408.0001;
W105FR (27700) Matr. 20408.0001;
W113UK (23335) Matr. 20408.0001;
W63TAUS (25885) Matr. 20408.0001;
W63TEX (24768) Matr. 20408.0001;
W73FR (23329) Matr. 20408.0001;
W83DE (24833) Matr. 20408.0001;
W83NL (24599) Matr. 20313.0001;
W83SP (23317) Matr. 20312.0001;
W83TAUS (25886) Matr. 20408.0001;
W83TEX (23310) Matr. 20318.0001;
W83TK (23320) Matr. 20408.0001;
W83TTK) (23321) Matr. 20408.0001;
W83UK (23302) Matr. 20408.0001;
W85FR (27699) Matr. 20408.0001;
W93TEX (23308) Matr. 20408.0001;
W93UK (23330) Matr. 20408.0001;
W9521E (25379) Matr. 20408.0001;
WA10IT (26880) Matr. 20408.0001;
WA10PT (27641) Matr. 20408.0001;

WA6IT (26878) Matr. 20408.0001;
WA6PT (27639) Matr. 20408.0001;
WA8IT (26879) Matr. 20408.0001;
WA8PT (27640) Matr. 20408.0001;
WP100EX (27761) Matr. 20408.0001;
WP67EX (27757) Matr. 20402.0001.

n1040230: Modified shock absorber bracket - Comunanza plant

From the registration no. 11107.0001, the washing machines and Washer-Dryers produced in the Comunanza factory Plant, have used modified shock absorbers with the bracket that fixes onto the cabinet.
The codes for the new shock absorbers are:
Code 086372 - Shock absorber 120 N (11105);
Code 086515 - Shock absorber 80 N (11105);
The modification also involved the cabinets in the fixing area that for the shock absorbers represent a different type of slotting (see enclosed figure).
To avoid the proliferation of the codes, the modified cabinets are handled with the same SAT code as the pre-modification, when replacing the cabinet you will need to check the registration number of the appliance.
In order to perform a proper task the intervention of the cabinet replacement it is recommended, that at least in the initial phase, to keep both the combination of shock absorbers in stock. The shock absorbers code 066184 and 064503 will continue to be normally handled.

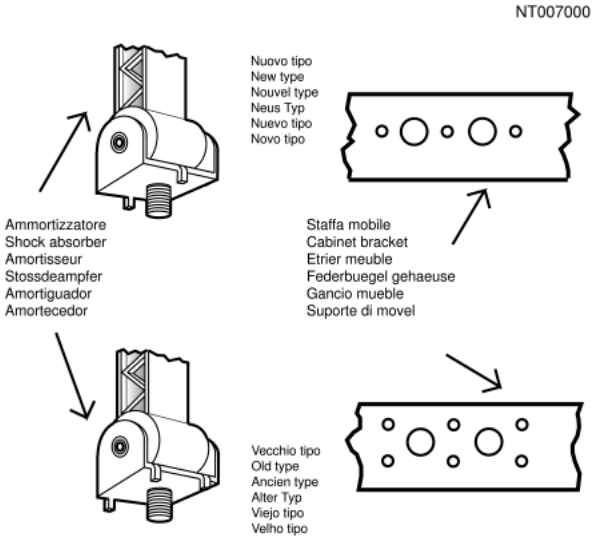

n1040236: DISPLAY CARD WITH NEW DISPLAY

From the registration number 11203.0001 on all the Washing Machines and Washer-Driers of the Evolution Range, a new card is used with a new display Code SAT 084759.
The new display card can be utilised instead of the pre-modified Code 084330, but not vice versa.
The card 084330 will be administered until stocks last.

n1040242: Power card with welded eeprom.

From serial number 20304.0001, IDC power card with welded eeprom is used to ensure the perfect connection of all parts, in the Comunanza, Teverola and Brembate factories.
To replace the module with welded eeprom, it will be necessary to use the eeprom indicated in the SAT document of the model concerned.
To replace the module on a unit with welded eeprom both the SAT module and the eeprom are required, because the latter cannot be reused.

n1040252: DE model displays and power modules.

Evolution model new power module and display card specifically for the German market.

From serial number 20220.0001, the following parts are used on models WE12SDE (27149), WE14SDE (27150), WE14DE (27080) and WE16DE (27151):

Code 088762 - EVM12 Evolution LCD card without EEPROM.
Code 088873 - No EEPROM power module (without EEPROM).

The new parts are not individually interchangeable with the premodified ones which continue to be regularly managed.
The software of the EEPROMs has not been modified therefore they remain unchanged.

n1040256: Cast iron bearing spider 1200-1400-1600.

In order to reduce the number of spare parts managed, the 1600 rpm tank unit with detergent recovery, code SAT 074217 (identified by the cast- iron bearing spider) can
be used on 1200 rpm models, provided that the top counterweight is removed & the tank springs
077182 are fitted. (The cast-iron bearing spider compensates for the removal of the top
counterweight.) When stock of 074217 is exhausted, code 084591, specific to the 1600 rpm
models will be issued.

n1040273: WE-DE display version replaced.

From serial number 20916.0001 Evolution (WE) washing machines for the German market (DE) are fitted with the display module SAT code 084759 in place of the 088762 which will be managed until stocks run out.
The relevant models are:
WE12SDE (27149)
WE14DE (27080)
WE14SDE (27150)
WE16DE (27151).

n1040276: Power supply cable + integrally moulded filter.

All appliances produced in the Comunanza (from serial no. 21008.0001), Teverola (from serial no. 21111.0001) and Brembate (from serial no. 21119.0001) factories have been equipped with power supply cables with integrally moulded filter (see fig.1 - 1A and 1B) and new units having a specific opening at the back for fixing the new cables (see fig. 1 - 1C).
The new units, together with the new cables, can be used in place of the premodification ones, by connecting the wiring to the cable, as shown in figure 1 - 1D.
The codes of the new units and of those replaced (ESI - table n1040276fig02), which will be managed until stocks run out, are given below.


The new power supply cables are:
Code 091632 - Power supply cable 3x1 schuko 1.5m+capacitance filter;
Code 091633 - Power supply cable 3x1 schuko 1.5m+inductive filter;
Code 091634 - Power supply cable UK 3x1 l= 1950mm + inductive filter;
Code 091635 - Power supply cable UK 3x1 l=1950mm+capacitance filter;
Code 091636 - Power supply cable l=2.55m AUS+inductive filter;
Code 091641 - Power supply cable l=2550mm AG +capacitance filter;
Code 091642 - Power supply cable 1.85mt SHUKO no inductive filter;
Code 091643 - Power supply cable 3x1 (CH) 1.5m+inductive filter;
Code 091645 - Power supply cable 3450mm SOUTH AF.+capacitance filter;
Code 091690 - Power supply cable shuko l2.55m KOREA+inductive filter;
Code 091689 - Power Supply cable l=2550mm AG+inductive filter.

IMPORTANT: the fixing / continuity screw is a specific self-scraping screw (code 092348) that ensures earth continuity between the filter and the unit. The same screw must be refitted in order to guarantee machine conformity.

The premodification wirings, are also managed for modified products by making the connection to the terminal block of the new cable as shown in fig. 1 - 1D.
The wiring diagrams given in the Documentation remain unchanged.

DESCRIZIONE MOBILI	STABILIMENTO	CODICE SAT MOBILE V.T.	CODICE SAT MOBILE N.T.
MOBILE B.27 'AB40-STAB.46'	TEVEROLA	65974	**90584**
MOBILE BIANCO 'W113(UK)'	TEVEROLA	75417	**90583**
MOBILE BIANCO 'LVB2000'	COMUNANZA	64500	**90582**
MOBILE BIANCO 'ALS-ABS LVB2000'	COMUNANZA	74146	**90581**
MOBILE SILVER 'LVB2000'	COMUNANZA	74184	**90580**
MOBILE SILVER ALS'LVB2000	COMUNANZA	74629	**90579**
MOBILE BIANCO W133(UK)	COMUNANZA	75315	**90578**
MOBILE BIANCO AL148FR'	COMUNANZA	76629	**90577**
MOBILE BIANCO WS63XIT)'	COMUNANZA	76744	**90576**
MOBILE SILVER FIAT 647'W68XSIT'	COMUNANZA	77022	**90575**
MOBILE BIANCO DIALOGIC-2001	COMUNANZA	84310	**90574**
MOBILE BIANCO LBE8X	COMUNANZA	84808	**90573**
MOBILE BIANCO27 INDESIT	BREMBATE	84713	**91748**
MOBILE ARISTON BIANCO27 6KG	BREMBATE	89483	**91742**
MOBILE BIANCO27 6KG '535'	BREMBATE	83287	**91749**
MOBILE BIANCO27 5KG	BREMBATE	81696	**91752**
MOBILE ARISTON BIANCO27 SLIM	BREMBATE	89649	**91754**
MOBILE INDESIT BIANCO27	BREMBATE	89963	**91756**
MOBILE BIANCO27 6KG INDESIT	BREMBATE	91036	**91758**

FIG. 1

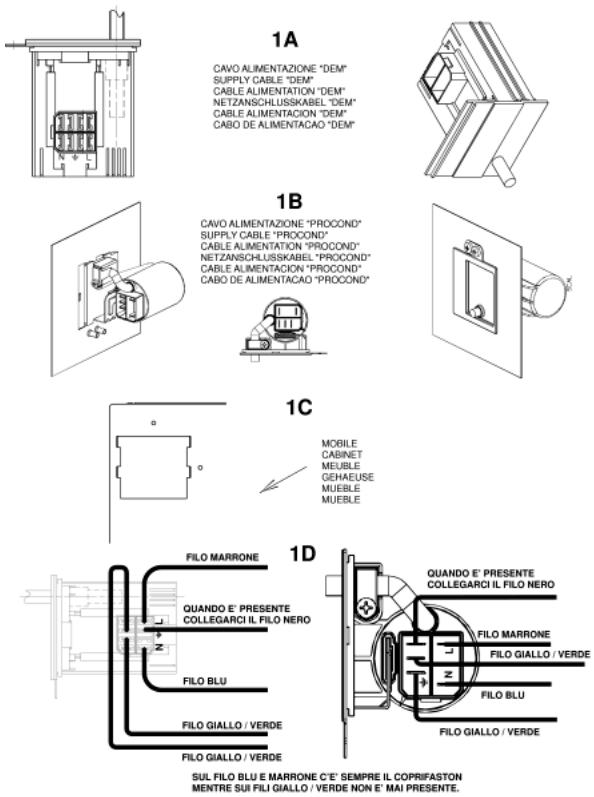

n1040282: New drainage OKO system.

From serial number 21219.0001, the new "OKO" drainage system has been introduced on the washing machines produced in the Comunanza factory.

The last two numbers of the Industrial Code (located on the rating plate) of the models relevant to this note will be 30 (e.g. 80233560130 - see Appendix A)

N.B. The industrial code will not change on the models with induction motor (see following list).

MODEL	INDUSTRIAL CODE
ABS53XIT	80224800000
AB54XPT	80224870100
AB63XEX	80225100100
ABS63XEU	80225180100
WS44XIT	80233440100
WS431TXEX	80233470100
WS642TXEX	80233540100
W63XSP	80233890000
AB53XEU	80238820000
AB65XEU	80238830000
AL 64XSP	80239020100
WS43XIT	80244510000
WS53XIT	80244520000
WH66TXE	80253750100
ABS63XEO	80263900000

The new items are:

- EEPROM (the OKO system requires a new setting of load timing parameters). THE NEW EEPROMS REPLACE ALL THE ONES CODED PREVIOUSLY.
- BOWL (hopper tube hole shifted forwards);
- DETERGENT LOADING TUBE (see fig. 1);
- PRESSURE SWITCH (changed levels);
- OKO PUMP BOWL BLOWER + BALL (see fig. 2A, 2B and 2C);
- CONDUCTIVITY SENSOR (if provided, it is shorter than the premodification item);
- DRAIN PUMP (without detergent collecting tube connection);
- HOPPER (shifted in front of detergent loading tube connection). Fig. 3A post-modification. Fig. 3B premodification);
- AIR TRAP (different shape);
- PRESSURE SWITCH TUBE (different length);
- DRAIN TUBE STOP (specific);

In particular, the OKO system consists of a spherical plastic component inserted in the tube that connects the bowl to the drain pump (see fig.2 A).
At the beginning of each wash cycle the washing machine fills water for 10 seconds and activates the drain pump for 2 seconds. In this way, the water level in the bowl is different from that in the drain tube; this difference increases the thrust of the ball upwards, closing the bowl-pump connection tube hermetically (see fig. 2D).
This system has the double advantage of:
1) separating the wash water and the water in the drain hose, thus saving energy during the heating phase;
2) and ensuring optimal use of all the detergent.
With the introduction of this new component, the detergent collecting tube is no longer required and the pump has one hole only to convey water from the tank.
For the correct operation of the OKO system, it is important that the drain hose of the washing machine remains fixed to the back of the unit with a plastic clamp (to this end, the clamp withstands a 25 kg load; see reference 1 in fig. 4); otherwise, the drain hose must absolutely reach the height of the clamp. (minimum 60 cm.)













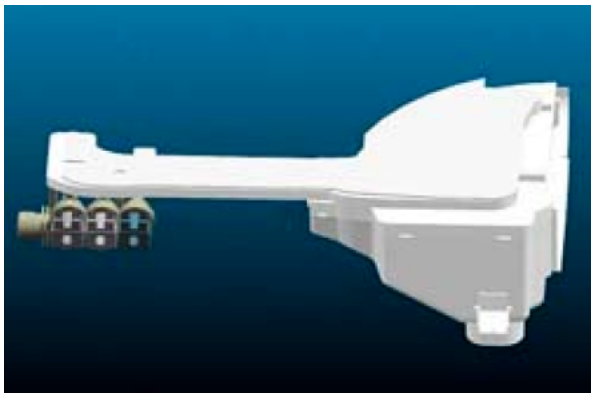



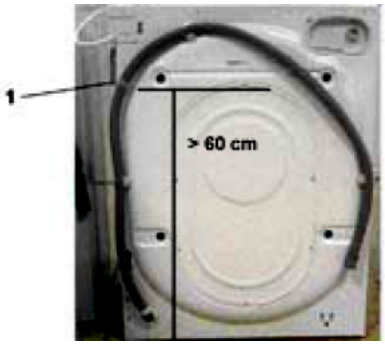

n1040286: Shock absorbers with 8.15 mm fixing hole.


From serial number 30127.0001, for appliances produced in the Comunanza factory, the shock absorbers will be fixed to the tank unit cradle using: the 8 mm diameter screw code 093750 in place of the 10 mm screw code 030446, and related locking nut code 030443 in place of code 030680.
The items affected by this modification are:
Code 093848 - Tank unit cradle 46 lt ;
Code 093878 - Tank unit cradle 40 lt.
Code 093884 - Shock absorber 80 N
Code 093885 - Shock absorber 120 N

The premodified shock absorbers code 086515 and 086372 will continue to be used, whereas cradles code 064518 and 066074 will be used until stocks run out, after which they will be replaced with the new items after widening the shock absorber fixing holes to a diameter of 11 mm.

n1040325: New shock absorber fixing system with pin

From serial no. 40427.0001, shock absorbers have been fixed to the tank unit cradle with two 11 mm pins code C00110163 (see fig. 01 and 02 enclosed) in place of the 8 mm screws code 093750 and relevant locking nuts code 030443, on all washing machines and dryers produced in the Comunanza factory.
The items affected by this modification are:
1) The cradles have the same Service code, as they can be used in place of the new ones after widening the shock absorber fixing holes to a diameter of 10 mm.
Code 093848 - Tank unit cradle 46 lt
Code 093878 - Tank unit cradle 40 lt.
2) The new shock absorbers, with fixing bushing having no s/steel spacer, are not managed as they are interchangeable with the premodified items (make sure they are CIMA type, as the managed items), fixed with M8 screws code 093750 and related locking nut code 030443 (see figs. 05 and 06).
Code 093884 - Shock absorber 80 N
Code 093885 - Shock absorber 100 N

To remove the shock absorber from the tank, first extract the pin with a few hammer taps (see fig.03) until it is aligned with the tank bracket and then pull it out with a pair of pliers (see fig. 04).
(To refit the shock absorber use a new pin. Insert the pin until the toroidal edge is aligned with the bracket.)

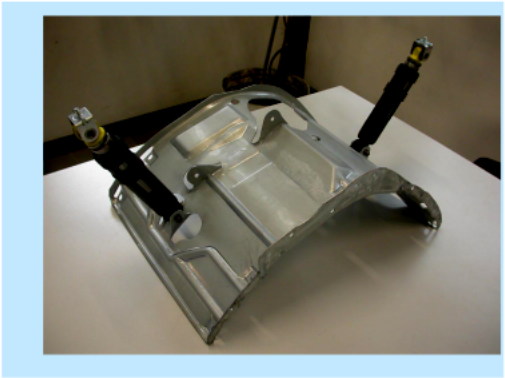











n1040371: The T4 mechanism type 4.

From serial number 30612.0001, the T4 mechanism has been introduced on some oscillating units.
The new tub units are perfectly interchangeable with the premodification ones and therefore maintain the same SAT codes.

The modification especially concerns the basket cross element and the tub cross element assembly that are specific for the new mechanism.
For servicing the products both the premodification tub cross element assembly (code 074213) and the new assembly (cod. 096077) must be managed; their use is indicated by the serial number of the relevant product.

The relevant Sat codes are:

TUBS (they maintain same SAT code as the premodification parts).
Models “Evizzati “ Serial number > 30312.0001 and < 30616.0001
SAT code 094279 TUB 46L.B5 CV5 EVO II 1200 rpm;
SAT code 094281 TUB 46 L. B5-CV5 LD EVO II 1200 rpm LD;
SAT code 094287 Tub 40 litres b5-cv5 40 litres 1200-1400 rpm;.

Models Serial number <30312.0001 and > 30616.0001.
Cod. SAT 092257 OUTER TANK & INNER DRUM ASSY B5 CV5
Cod, SAT 092263 OUTER- SET 46 L. CV5-B5 LD;
Cod. SAT 092545 OUTER TANK & INNER DRUM ASSY 40 L B5 CV5


CROSS ELEMENT ASSEMBLY AND SINGLE PARTS MANAGED AS REPLACEMENTS.
SAT code 096077 Cross element assembly with seal rings CV4;
SAT code 096186 Seal ring CV4;
SAT code 013563 Bearing 6205-2Z SKF;
SAT Code 002591 - Bearing 6204-2Z SKF;
On 1200 rpm models, which indicate replacement of the drum with spider in aluminium, with a spider in red ghisa (LVA cod. C00094280 and LVB cod. C00094282), the following pocedure will need to be followed:
1) Remove the upper counter-weight;
2) Position the balancing springs inside the support holes found further back than the previous position on the cabinet (see fig.001);
3) Affix the shock absorbers on the support holes positioned on the back part of the cabinet (see fig.002).





Electric schemes and links

Cod. 16001498701

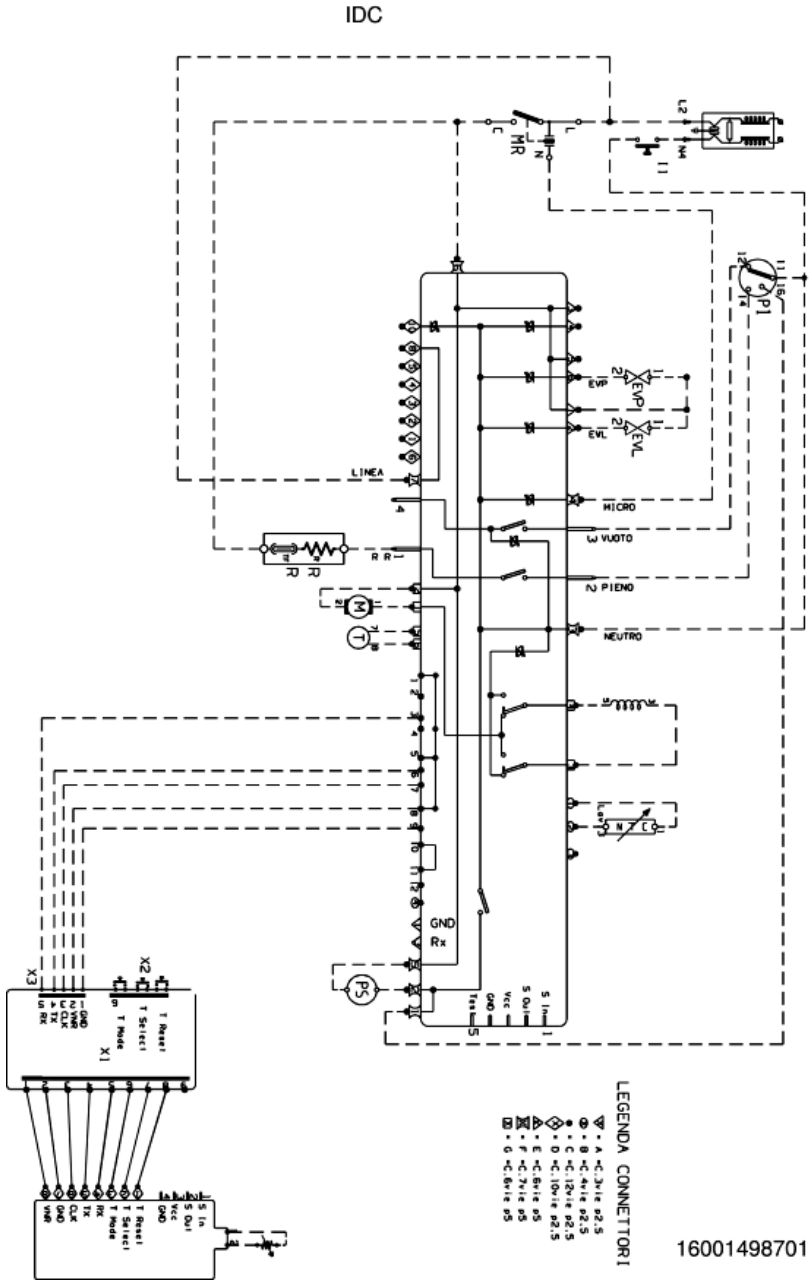

Legend

Legend: 16001498701


AQS	Aquastop electrovalve	Mzbn/MTA	zbn timer motor
B	Buzzer	N	Neutral or Terminal Board
BC	Blocco Cesto	NC	Spin cycle exclusion
BF	Terminal board contact, motor fan and dryer	P	Pressure switch
BP	Buzzer	P1	1st level pressure cut-off switch
C	Condensator	P2	2nd level pressure cut-off switch
CA	Condensator	PA	High speed potentiometer
DV	Switching device	PB	Low speed potentiometer
EF/CL	Electro-Valve Cold Water / Bleach	PL	Pure Wool
EF/L	Electro-Valve Cold Water / Wash	PM	Motor Thermoprotector
EF/P	Electro-Valve Cold Water / Prewash	PR	Timer programmer or Pressure switch
ER	Exclude Heating Element	PS	Drain pump
ET	Thermostat disactivation	R	Heating element
EV	Electrovalve	RE	Relay
EVA	Dryer electrovalve	RR	Heating element
EVC	Hot water electrovalve	RV	Speed regulator
EVF	Elettrovalvola acqua fredda	Ras/RA	Dryer heating element
EVL	Wash electrovalve	S	LED
EVP	Pre Wash electrovalve	SL	Line LED
FA	Antijamming filter	SO	Door LED
FD	Delicate drying cycle thermostat	SR	Heating LED
FE	Strong drying cycle thermostat	ST	Temperature selector
FRT	Thermofusible Heating Element	SV	Speed Selector for Spin
I	Inverter	T	Timer contacts
I1..2..3..	Switches/switching devices	TA	Drying timer contacts
IA	Switch On/Off	TB	Low Temperature Thermostat
IC	Switch N.C. - 1/2 Load	TC	Spider wheel earth
ID	Switch display	TFL	Flange earth
IE	Water Saving Device	TG	Main earth
IF	Switch - Spin Reduction	TH	Thermostat
IP	Door switch	TH1	1st temperature thermostat
IR	Line switch	TH2	2nd temperature thermostat
IS	Water-stop	TH3	3rd temperature thermostat

L	Line or Lamp	THF	Operating thermostat
LB	Low Level	THR	Adjustable thermostat
LN	Normal Level	TM	Motor earth
LS	Pilot lamp	TMB	Main cabinet earth
M	Earth-symbol	TMP	Motor thermal protector
MC	Spin cycle motor	TMS	Thermostop
MI	MOTOR WITH PULLEY	TP	Thermal protector
ML	Wash cycle motor	TPS	Drain pump earth
MO	Terminal Board	TR	Heating element earth
MP	Door dip-switch	TS	Safety thermostat
MR	Thermal Lock	TT	Timer earthing connection
MT	Timer motor	TTH	Earthing Thermostat
MV	Motor fan	TV	Tank earth
MV -Ras	Dryer heating element	ZBN	Timer


Electric schemes and links

Cod. 16001500102


IDC

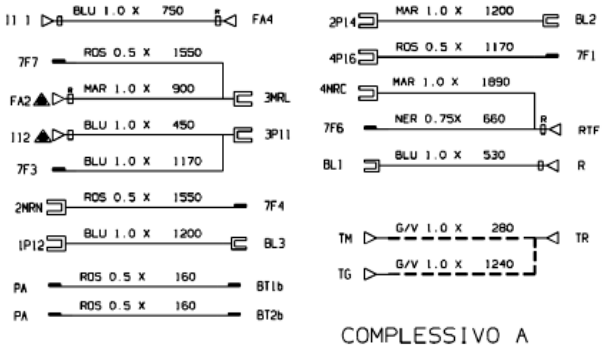

COMPLESSIVO A

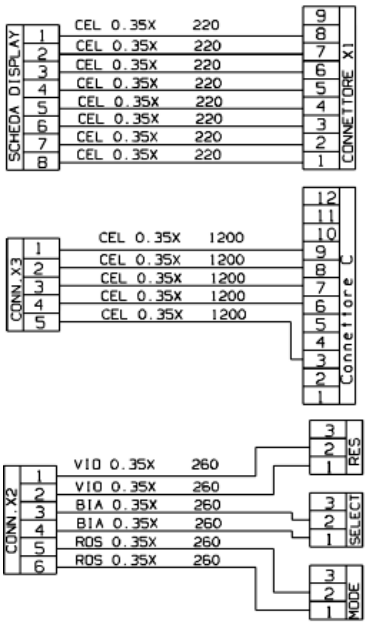


COMPLESSIVO B DISPLAY+PULSANTI

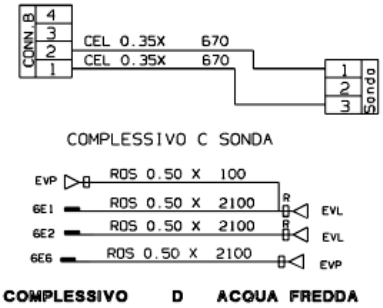


COMPLESSIVO C SONDA

COMPLESSIVO D ACQUA FREDDA



COMPLESSIVO E MOTORE



COMPLESSIVO F POMPA DI SCARICO 50 Hz

16001500102

Legend


Legend: 16001500102

AQS	Aquastop electrovalve	Mzbn/MTA	zbn timer motor
B	Buzzer	N	Neutral or Terminal Board
BC	Blocco Cesto	NC	Spin cycle exclusion
BF	Terminal board contact, motor fan and dryer	P	Pressure switch
BP	Buzzer	P1	1st level pressure cut-off switch
C	Condensator	P2	2nd level pressure cut-off switch
CA	Condensator	PA	High speed potentiometer
DV	Switching device	PB	Low speed potentiometer
EF/CL	Electro-Valve Cold Water / Bleach	PL	Pure Wool
EF/L	Electro-Valve Cold Water / Wash	PM	Motor Thermoprotector
EF/P	Electro-Valve Cold Water / Prewash	PR	Timer programmer or Pressure switch
ER	Exclude Heating Element	PS	Drain pump
ET	Thermostat disactivation	R	Heating element
EV	Electrovalve	RE	Relay
EVA	Dryer electrovalve	RR	Heating element
EVC	Hot water electrovalve	RV	Speed regulator
EVF	Elettrovalvola acqua fredda	Ras/RA	Dryer heating element
EVL	Wash electrovalve	S	LED
EVP	Pre Wash electrovalve	SL	Line LED
FA	Antijamming filter	SO	Door LED
FD	Delicate drying cycle thermostat	SR	Heating LED
FE	Strong drying cycle thermostat	ST	Temperature selector
FRT	Thermofusible Heating Element	SV	Speed Selector for Spin
I	Inverter	T	Timer contacts
I1..2..3..	Switches/switching devices	TA	Drying timer contacts
IA	Switch On/Off	TB	Low Temperature Thermostat
IC	Switch N.C. - 1/2 Load	TC	Spider wheel earth
ID	Switch display	TFL	Flange earth
IE	Water Saving Device	TG	Main earth
IF	Switch - Spin Reduction	TH	Thermostat
IP	Door switch	TH1	1st temperature thermostat
IR	Line switch	TH2	2nd temperature thermostat
IS	Water-stop	TH3	3rd temperature thermostat

L	Line or Lamp	THF	Operating thermostat
LB	Low Level	THR	Adjustable thermostat
LN	Normal Level	TM	Motor earth
LS	Pilot lamp	TMB	Main cabinet earth
M	Earth-symbol	TMP	Motor thermal protector
MC	Spin cycle motor	TMS	Thermostop
MI	MOTOR WITH PULLEY	TP	Thermal protector
ML	Wash cycle motor	TPS	Drain pump earth
MO	Terminal Board	TR	Heating element earth
MP	Door dip-switch	TS	Safety thermostat
MR	Thermal Lock	TT	Timer earthing connection
MT	Timer motor	TTH	Earthing Thermostat
MV	Motor fan	TV	Tank earth
MV -Ras	Dryer heating element	ZBN	Timer

Electric schemes and links

Cod. ce013200

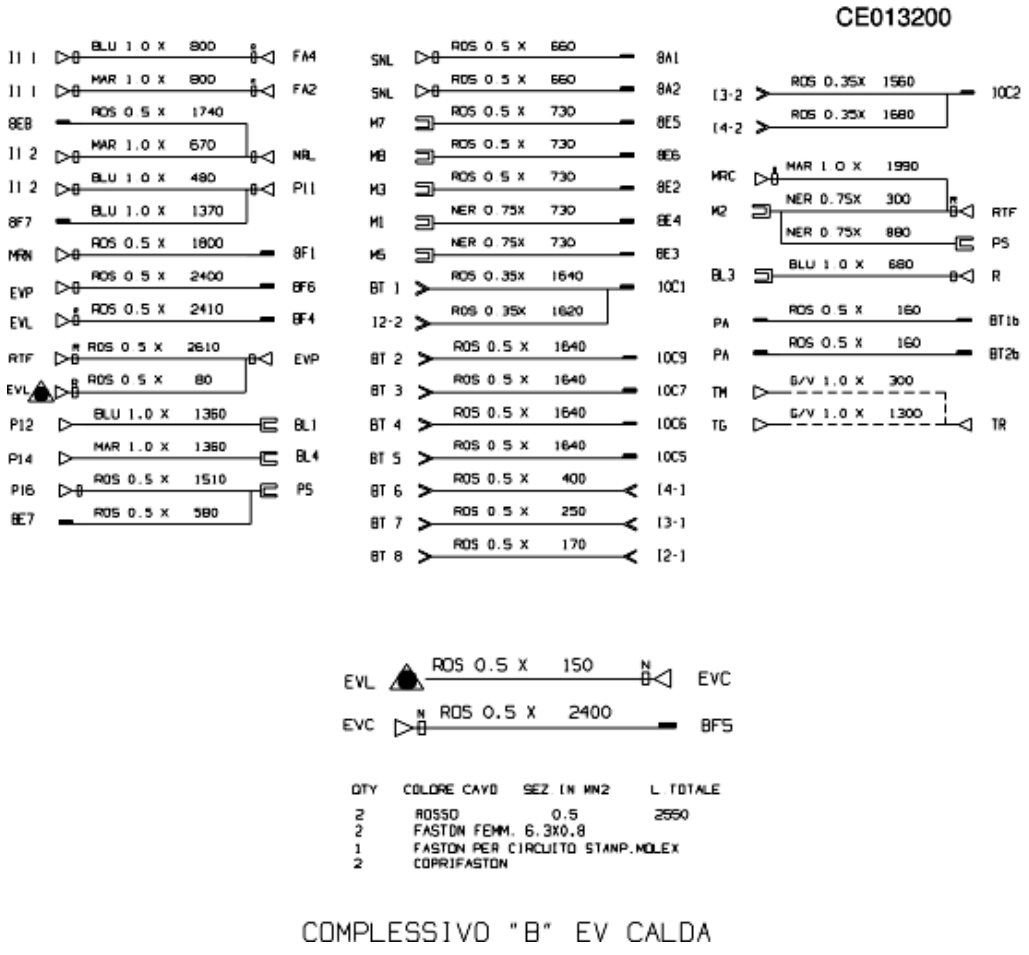

Legend

Legend: ce013200

AQS	Aquastop electrovalve	Mzbn/MTA	zbn timer motor
B	Buzzer	N	Neutral or Terminal Board
BC	Blocco Cesto	NC	Spin cycle exclusion
BF	Terminal board contact, motor fan and dryer	P	Pressure switch
BP	Buzzer	P1	1st level pressure cut-off switch
C	Condensator	P2	2nd level pressure cut-off switch
CA	Condensator	PA	High speed potentiometer
DV	Switching device	PB	Low speed potentiometer
EF/CL	Electro-Valve Cold Water / Bleach	PL	Pure Wool
EF/L	Electro-Valve Cold Water / Wash	PM	Motor Thermoprotector
EF/P	Electro-Valve Cold Water / Prewash	PR	Timer programmer or Pressure switch
ER	Exclude Heating Element	PS	Drain pump
ET	Thermostat disactivation	R	Heating element
EV	Electrovalve	RE	Relay
EVA	Dryer electrovalve	RR	Heating element
EVC	Hot water electrovalve	RV	Speed regulator
EVF	Elettrovalvola acqua fredda	Ras/RA	Dryer heating element
EVL	Wash electrovalve	S	LED
EVP	Pre Wash electrovalve	SL	Line LED
FA	Antijamming filter	SO	Door LED
FD	Delicate drying cycle thermostat	SR	Heating LED
FE	Strong drying cycle thermostat	ST	Temperature selector
FRT	Thermofusible Heating Element	SV	Speed Selector for Spin
I	Inverter	T	Timer contacts
I1..2..3..	Switches/switching devices	TA	Drying timer contacts
IA	Switch On/Off	TB	Low Temperature Thermostat
IC	Switch N.C. - 1/2 Load	TC	Spider wheel earth
ID	Switch display	TFL	Flange earth
IE	Water Saving Device	TG	Main earth
IF	Switch - Spin Reduction	TH	Thermostat
IP	Door switch	TH1	1st temperature thermostat
IR	Line switch	TH2	2nd temperature thermostat
IS	Water-stop	TH3	3rd temperature thermostat

L	Line or Lamp	THF	Operating thermostat
LB	Low Level	THR	Adjustable thermostat
LN	Normal Level	TM	Motor earth
LS	Pilot lamp	TMB	Main cabinet earth
M	Earth-symbol	TMP	Motor thermal protector
MC	Spin cycle motor	TMS	Thermostop
MI	MOTOR WITH PULLEY	TP	Thermal protector
ML	Wash cycle motor	TPS	Drain pump earth
MO	Terminal Board	TR	Heating element earth
MP	Door dip-switch	TS	Safety thermostat
MR	Thermal Lock	TT	Timer earthing connection
MT	Timer motor	TTH	Earthing Thermostat
MV	Motor fan	TV	Tank earth
MV -Ras	Dryer heating element	ZBN	Timer

Electric schemes and links

Cod. lg041000



Legend


Legend: lg041000

AQS	Aquastop electrovalve	Mzbn/MTA	zbn timer motor
B	Buzzer	N	Neutral or Terminal Board
BC	Blocco Cesto	NC	Spin cycle exclusion
BF	Terminal board contact, motor fan and dryer	P	Pressure switch
BP	Buzzer	P1	1st level pressure cut-off switch
C	Condensator	P2	2nd level pressure cut-off switch
CA	Condensator	PA	High speed potentiometer
DV	Switching device	PB	Low speed potentiometer
EF/CL	Electro-Valve Cold Water / Bleach	PL	Pure Wool
EF/L	Electro-Valve Cold Water / Wash	PM	Motor Thermoprotector
EF/P	Electro-Valve Cold Water / Prewash	PR	Timer programmer or Pressure switch
ER	Exclude Heating Element	PS	Drain pump
ET	Thermostat disactivation	R	Heating element
EV	Electrovalve	RE	Relay
EVA	Dryer electrovalve	RR	Heating element
EVC	Hot water electrovalve	RV	Speed regulator
EVF	Elettrovalvola acqua fredda	Ras/RA	Dryer heating element
EVL	Wash electrovalve	S	LED
EVP	Pre Wash electrovalve	SL	Line LED
FA	Antijamming filter	SO	Door LED
FD	Delicate drying cycle thermostat	SR	Heating LED
FE	Strong drying cycle thermostat	ST	Temperature selector
FRT	Thermofusible Heating Element	SV	Speed Selector for Spin
I	Inverter	T	Timer contacts
I1..2..3..	Switches/switching devices	TA	Drying timer contacts
IA	Switch On/Off	TB	Low Temperature Thermostat
IC	Switch N.C. - 1/2 Load	TC	Spider wheel earth
ID	Switch display	TFL	Flange earth
IE	Water Saving Device	TG	Main earth
IF	Switch - Spin Reduction	TH	Thermostat
IP	Door switch	TH1	1st temperature thermostat
IR	Line switch	TH2	2nd temperature thermostat
IS	Water-stop	TH3	3rd temperature thermostat

L	Line or Lamp	THF	Operating thermostat
LB	Low Level	THR	Adjustable thermostat
LN	Normal Level	TM	Motor earth
LS	Pilot lamp	TMB	Main cabinet earth
M	Earth-symbol	TMP	Motor thermal protector
MC	Spin cycle motor	TMS	Thermostop
MI	MOTOR WITH PULLEY	TP	Thermal protector
ML	Wash cycle motor	TPS	Drain pump earth
MO	Terminal Board	TR	Heating element earth
MP	Door dip-switch	TS	Safety thermostat
MR	Thermal Lock	TT	Timer earthing connection
MT	Timer motor	TTH	Earthing Thermostat
MV	Motor fan	TV	Tank earth
MV -Ras	Dryer heating element	ZBN	Timer

Electric schemes and links

Cod. se049300

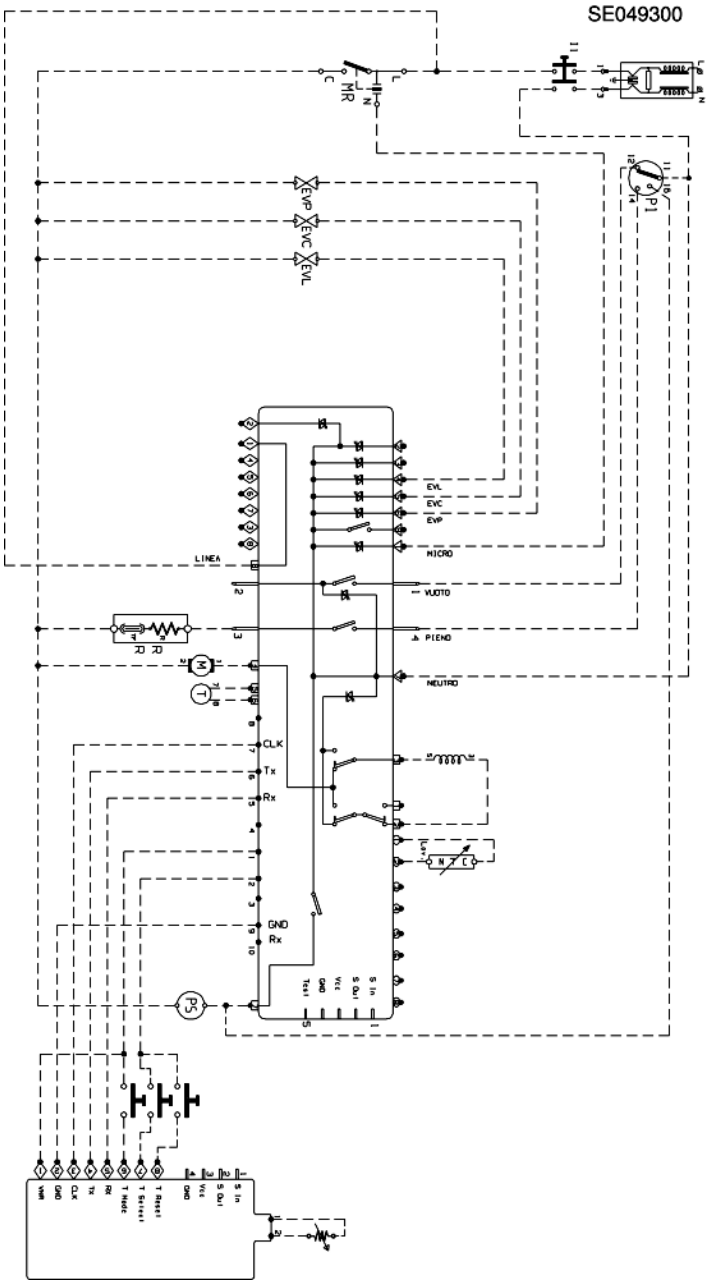

Legend

Legend: se049300

AQS	Aquastop electrovalve	Mzbn/MTA	zbn timer motor
B	Buzzer	N	Neutral or Terminal Board
BC	Blocco Cesto	NC	Spin cycle exclusion
BF	Terminal board contact, motor fan and dryer	P	Pressure switch
BP	Buzzer	P1	1st level pressure cut-off switch
C	Condensator	P2	2nd level pressure cut-off switch
CA	Condensator	PA	High speed potentiometer
DV	Switching device	PB	Low speed potentiometer
EF/CL	Electro-Valve Cold Water / Bleach	PL	Pure Wool
EF/L	Electro-Valve Cold Water / Wash	PM	Motor Thermoprotector
EF/P	Electro-Valve Cold Water / Prewash	PR	Timer programmer or Pressure switch
ER	Exclude Heating Element	PS	Drain pump
ET	Thermostat disactivation	R	Heating element
EV	Electrovalve	RE	Relay
EVA	Dryer electrovalve	RR	Heating element
EVC	Hot water electrovalve	RV	Speed regulator
EVF	Elettrovalvola acqua fredda	Ras/RA	Dryer heating element
EVL	Wash electrovalve	S	LED
EVP	Pre Wash electrovalve	SL	Line LED
FA	Antijamming filter	SO	Door LED
FD	Delicate drying cycle thermostat	SR	Heating LED
FE	Strong drying cycle thermostat	ST	Temperature selector
FRT	Thermofusible Heating Element	SV	Speed Selector for Spin
I	Inverter	T	Timer contacts
I1..2..3..	Switches/switching devices	TA	Drying timer contacts
IA	Switch On/Off	TB	Low Temperature Thermostat
IC	Switch N.C. - 1/2 Load	TC	Spider wheel earth
ID	Switch display	TFL	Flange earth
IE	Water Saving Device	TG	Main earth
IF	Switch - Spin Reduction	TH	Thermostat
IP	Door switch	TH1	1st temperature thermostat
IR	Line switch	TH2	2nd temperature thermostat
IS	Water-stop	TH3	3rd temperature thermostat

L	Line or Lamp	THF	Operating thermostat
LB	Low Level	THR	Adjustable thermostat
LN	Normal Level	TM	Motor earth
LS	Pilot lamp	TMB	Main cabinet earth
M	Earth-symbol	TMP	Motor thermal protector
MC	Spin cycle motor	TMS	Thermostop
MI	MOTOR WITH PULLEY	TP	Thermal protector
ML	Wash cycle motor	TPS	Drain pump earth
MO	Terminal Board	TR	Heating element earth
MP	Door dip-switch	TS	Safety thermostat
MR	Thermal Lock	TT	Timer earthing connection
MT	Timer motor	TTH	Earthing Thermostat
MV	Motor fan	TV	Tank earth
MV -Ras	Dryer heating element	ZBN	Timer